Technical Datasheet

FM100
AeroFilm Infusion Mesh



Key Features

- Economical
- Good flow characteristics
- Easy to handle

Description

Economical, extruded polypropylene mesh used as a 'flow media' to assist the flow of resin across and throughout the laminate during the resin infusion process. The bi-planar extrusion ensures that a resin flow path is maintained even under full vacuum.

As an extruded mesh, FM100 offers a degree of conformability but is better suited to flatter, less complex mould shapes. For more complex mould shapes we would recommend our FM105 Knitted Infusion Mesh.

FM100 can be stacked in multiple layers to provided faster flow rates in selected areas or for layer scale infusions.

Like most other elements of the vacuum bagging or resin infusion 'stack' infusion mesh cannot be reused once resin has flowed through it and therefore should be considered a disposable consumable of the process.


Recommended Uses

- Vacuum resin infusion of less complex mould shapes
- Debulking prepregs (without release film)

Typical Use

FM100 Infusion Mesh would most commonly be used for vacuum resin infusion of less complex shaped small to medium sized mouldings including vehicle panels and small boat hulls.

For this type of resin infusion, peel ply would be positioned directly onto the laminate, followed by the FM100 Infusion Mesh, followed by the other infusion consumables (connectors, infusion spiral) and then enclosed within the vacuum bag. An example of one such typical bagging stack is shown below.

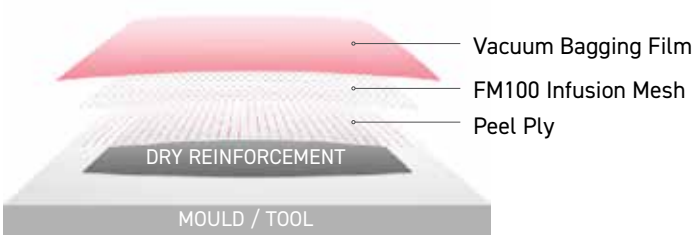

Specification

Property	Unit	Value
Material	-	Polypropylene
Width	mm	1050 (-0 +2%)
Format	-	Single Sheet
Areal Weight	g/m²	100
Maximum Service Temp	°C	100
Appearance	-	Clear Mesh

Handling & Storage

FM100 is a stable polypropylene mesh with no special handling or storage requirements.

Disclaimer

This data is not to be used for specifications. Values listed are for typical properties and should not be considered minimum or maximum. Our technical advice, whether verbal or in writing, is given in good faith but Easy Composites Ltd gives no warranty; express or implied, and all products are sold upon condition that purchasers will make their own tests to determine the quality and suitability of the product for their particular application and circumstances.

Easy Composites Ltd shall be in no way responsible for the proper use and service of the product, nor for the safeguarding of personnel or property, all of which is the duty of the user. Any information or suggestions are without warranty of any kind and purchasers are solely responsible for any loss arising from the use of such information or suggestions. No information or suggestions given by us shall be deemed to be a recommendation to use any product in conflict with any existing patent rights. Before using any of our products, users should familiarise themselves with the relevant technical and safety datasheets provided by Easy Composites Ltd.

AeroFilm and FM100 are trademarks of Easy Composites Ltd.

Easy Composites Ltd
Unit 39, Park Hall Business Village
Stoke-on-Trent, ST3 5XA
United Kingdom

Easy Composites EU B.V.
Beneluxbaan 16
Rijen, 5121 DC
Netherlands

W: **www.easycomposites.com**
E: **sales@easycomposites.com**
T: **+44 (0) 1782 454499**

Version 1.1
Revised 20/11/2025