

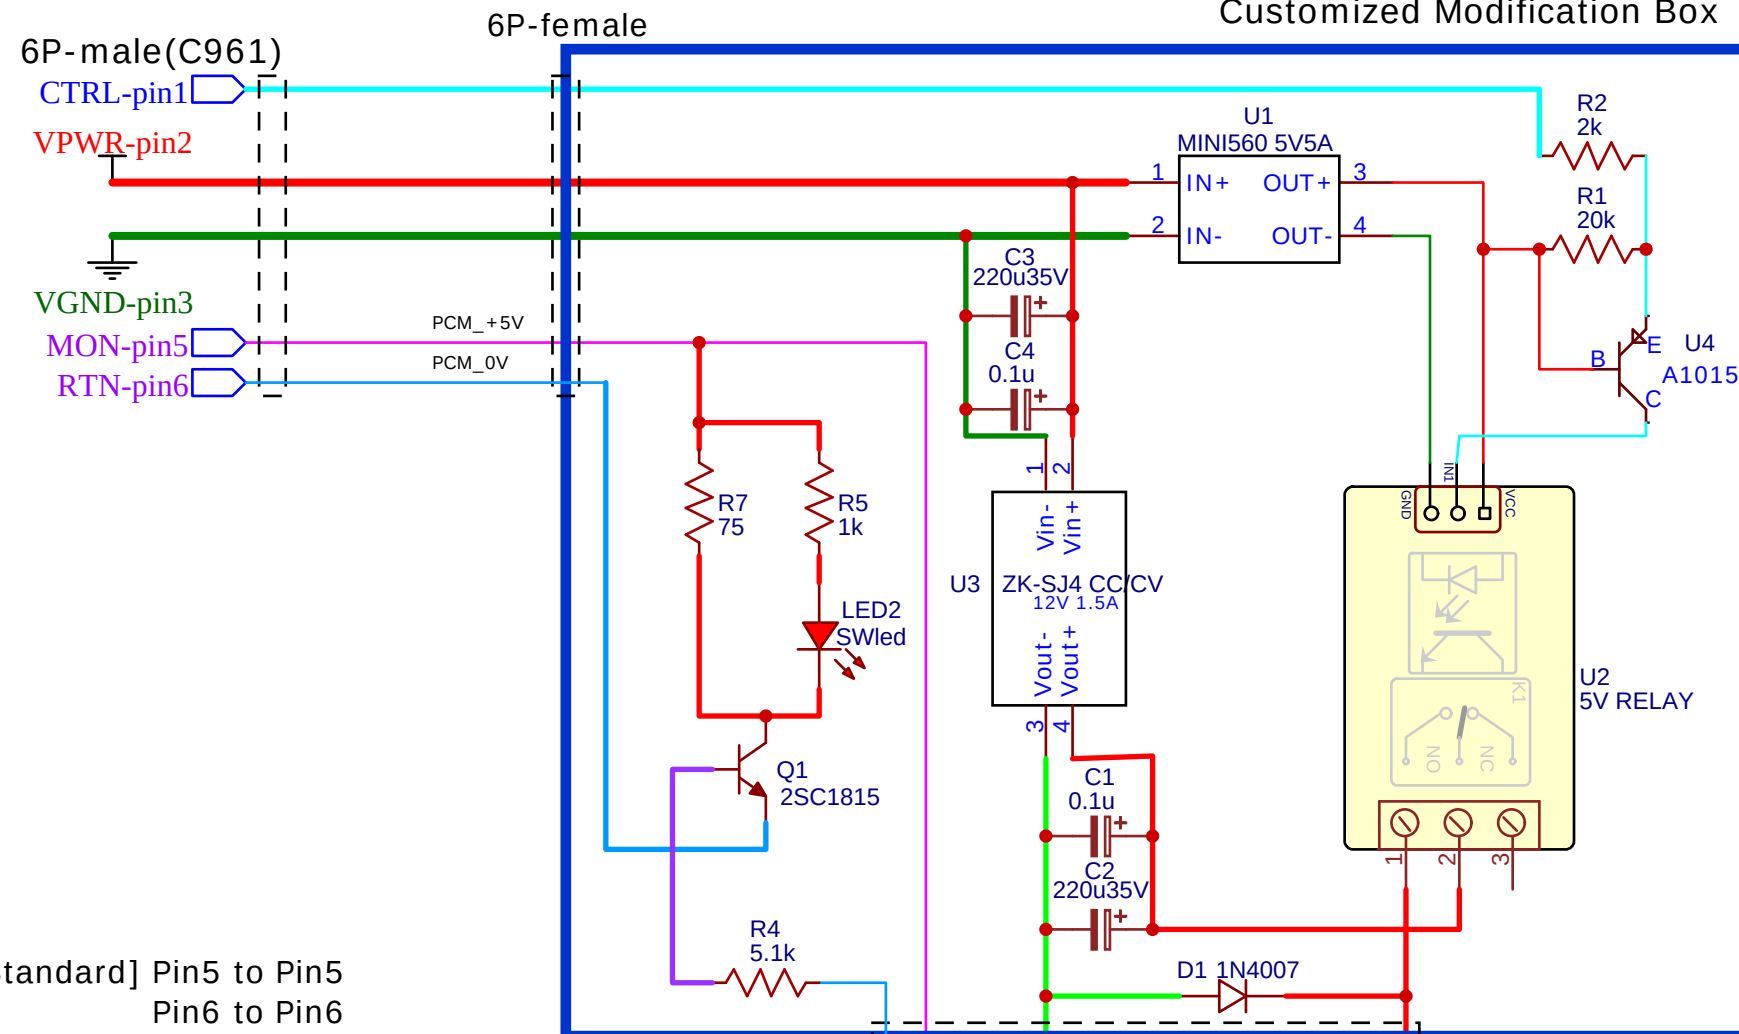


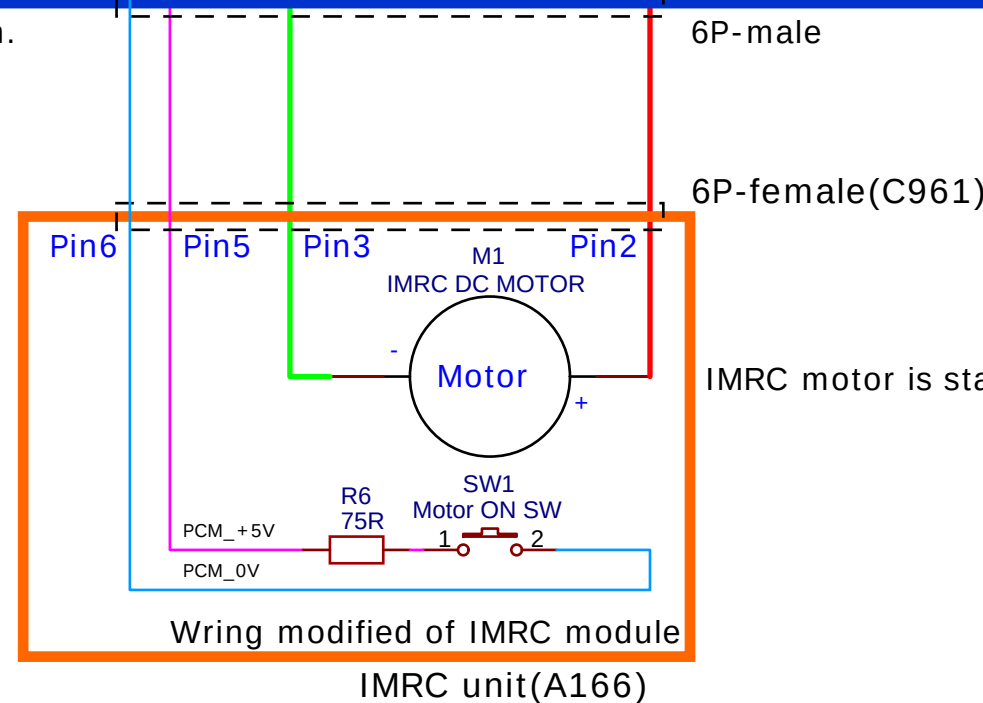

[Standard] Pin5 to Pin5
Pin6 to Pin6


[Option] NPN transistor detects 75R signal return.
NPN transistor detects hardware ON/OFF of 75R.
NPN transistor also turns on a LED to virtual.
Original: $I = V/R = 5/75 = 0.0667A = 66.7mA$

2SC1815 Pinout

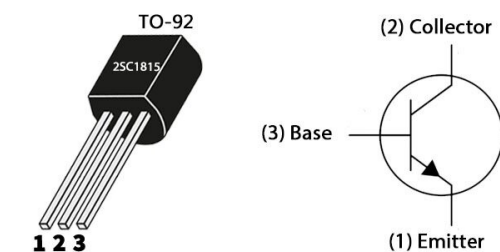

Wring modified of IMRC module
IMRC unit(A166)

A1015 Transistor Pinout

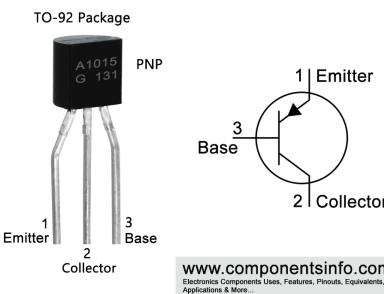

PNP transistor detects PCM 5V dropping to 4V for IMRC work signal.
ON = 4.0v (<4.5v)
OFF = 5.0v (>4.5v)

ZK-SJ4 FP5139 CC/CV power module is 12.0V and 1.5A to work.
(PlanB) LM2596 CC/CV step-down module is 11.4V/1.5A to work.
** Original IMRC design is 1.88A for stall constant current. **

TITLE: FORD FOCUS MK1 ST170 IMRC modify circuit and kit		REV: 6
EasyEDA		Sheet: 1/1
Company:		Date: 2026-07-08 Drawn By: JIR