

Project Proposal - Group 1

”3D Reconstruction via Direct (Semi-)Dense Visual Odometry using Stereo/Monocular Camera”

1 Abstract

We propose to implement a (semi-)dense 3d reconstruction using a pair of stereo cameras or a monocular camera. We will only focus on odometry and consider small static scenes. The reason why we use stereo/monocular camera is that they can be used in more practical situations, e.g. stereo cameras can be used in a robot or a self-driving car, monocular camera can be used in a cell phone. While RGBD cameras have limited usage, e.g. they can only be used in a certain range and the depth sensor(IR) is very sensitive to sun light. The reason why we choose direct image alignment is that it minimizes photometric error on every pixel of the image thus making use of the whole image information. Direct method has been proven to be more robust and accurate than feature based odometry. Moreover it can still run in real-time on a single CPU core if implemented appropriately. The whole project can be divided into 3 parts: a) Estimate the depth map of the scene using either stereo cameras or a monocular camera. For stereo cameras, we will implement depth estimation using block matching as we proposed in another proposal. For monocular camera, we will implement depth estimation proposed in [1] if time permits. b) Estimate camera motion between consecutive frames via direct (semi-)dense image alignment. We will implement it using the method proposed in [1, 2, 3]. We will implement our own Levenberg-Marquard optimizer with iteratively re-weighted residuals. c) Reconstruct the whole scene given the pre-computed depth map and camera poses in previous steps. We will borrow it from existing open source codes like OpenMVG or OpenMVS. Step (a) and (b) can be done in parallel, step (c) will be done after merging the work of (a) and (b). Note that step (b) is nearly finished now.

The detailed steps of the project is listed in the 2nd page.

2 Requirements

- Stereo Cameras(with global shutter, with standard view or wide field of view)
- Monocular Camera(with global shutter, with standard view or wide field of view)

3 Team

Yu Wang; Schnaubelt Max; Harinandan Teja Katam; Meng Liu

4 Work Plan

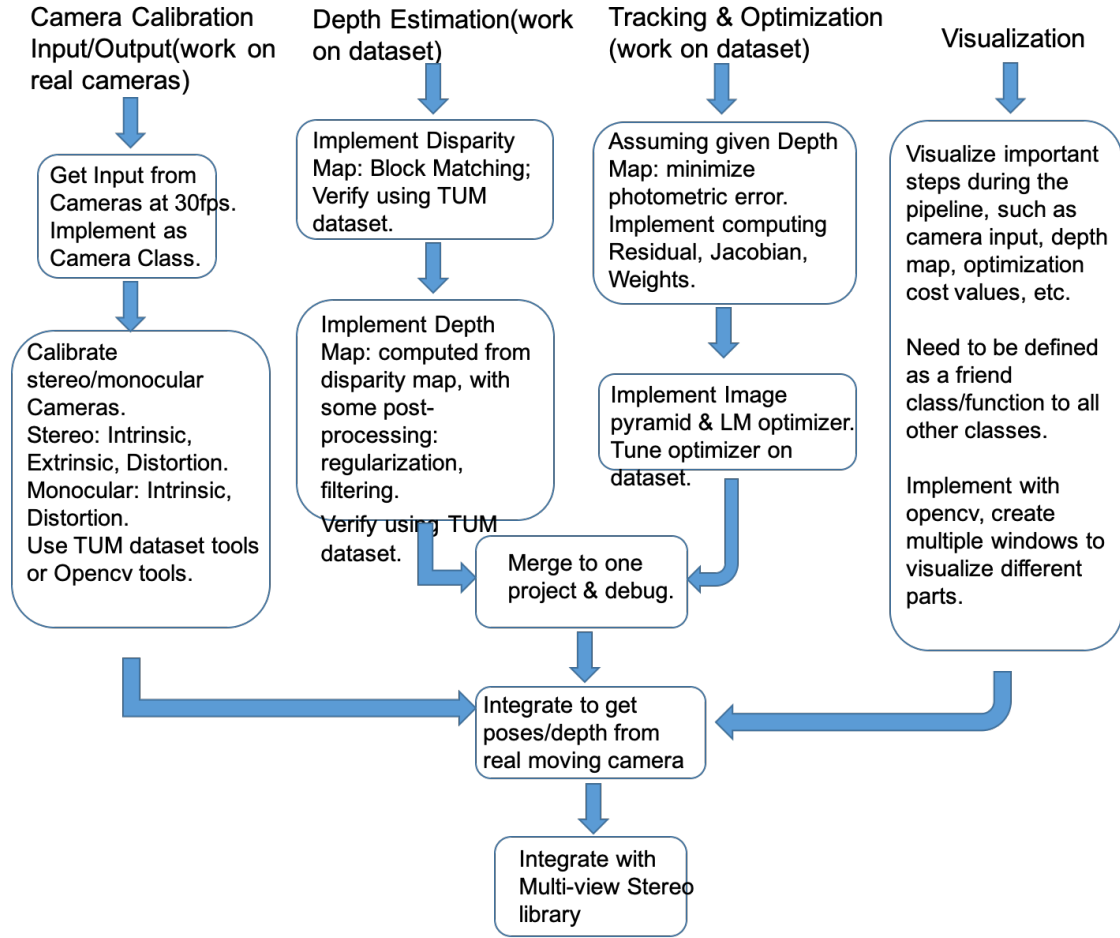


Figure 1: Method overview.

We will use OpenCV, Eigen, OpenMVG/OpenMVS (only for final multi-view registration) and Sophus (for Lie Algebra and Groups). In addition, we'll follow Google C++ Style and define everything as Classes. Each class will only expose necessary function to other classes so that we can integrate works from different parts in the end. We will track our works via Github.

References

- [1] Jakob Engel, Jurgen Sturm, and Daniel Cremers. Semi-dense visual odometry for a monocular camera. In *The IEEE International Conference on Computer Vision (ICCV)*, December 2013.
- [2] C. Kerl, J. Sturm, and D. Cremers. Robust odometry estimation for rgb-d cameras. In *2013 IEEE International Conference on Robotics and Automation*, pages 3748–3754, May 2013.
- [3] Christian Kerl, Jurgen Sturm, and Daniel Cremers. Dense visual slam for rgb-d cameras.