


PICKit™ 3 PROGRAMMER CONNECTOR PINOUT

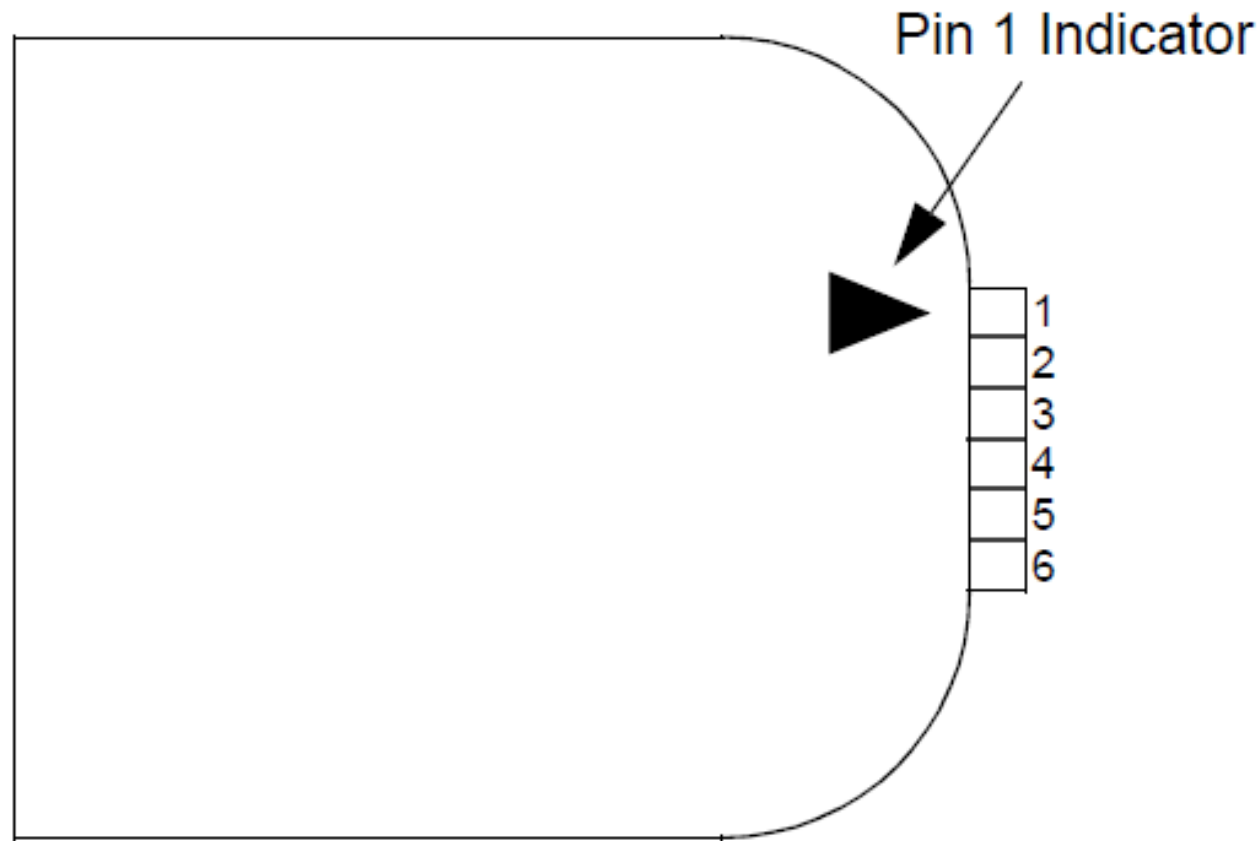

Pin Description*

- 1 = $\overline{\text{MCLR}}/\text{V}_{\text{PP}}$
- 2 = V_{DD} Target
- 3 = V_{SS} (ground)
- 4 = PGD (ICSPDAT)
- 5 = PGC (ICSPCLK)
- 6 = PGM (LVP)

* The 6-pin header (0.100" spacing) accepts 0.025" square pins.