windmar GROUP

LA COMPAÑÍA DE ENERGÍA RENOVABLE MÁS GRANDE DE PUERTO RICO Y EL CARIBE.

windmar Renewable Energy

PV Properties

windmar PV

windmar HOME

windmar SOLAR+ROOFING

windmar ROOFING

Coto Laurel Solar Farm, Ponce
Instalado en 2012

ENERGÍA DE LA BUENA

2002
Año Establecido

60K+
Hogares Energizados

2,000+
Empleados

50K+
Tesla Powerwalls Instaladas

windmar.com

ENERGIZANDO DESDE EL 2002

¿POR QUÉ WINDMAR?

windmar HOME

Powerwall
Premier Certified Installer

#1 EN EXPERIENCIA:

Fundada desde 2002 por una familia con sobre 70 años de experiencia en materiales de construcción en Puerto Rico, comenzamos a instalar paneles solares para la AEE, AAA y farmacéuticas.

Somos un equipo de empleados que ha manejado la contratación, desarrollo e instalación de proyectos solares por todo Puerto Rico que energizan a sobre 60,000+ hogares.

Además, somos la compañía con mas brigadas de instalación y servicios en el Caribe. Hemos instalado en sobre 1,500 hogares en un mes, algo que nunca ha podido realizar otra compañía.

- **Sobre 50 diseñadores** evaluando hogares, haciendo análisis de sombra y consultando el plano de instalación con todos nuestros clientes.
- **Sobre 1,000 técnicos solares** instalando sistemas solares todos los dias.
- **Proceso único de Quality-control** al final de cada instalación por jefe de brigada, supervisor y diseñador solar.
- Lanzamos en el 2020 el **Windmar Training Center**, el único centro de adiestramiento para sistemas solares residenciales en el Caribe.

#1 EN EQUIPOS:

Solo usamos los mejores materiales de instalación, nada hecho en China ni modelos en liquidación. Todos nuestros equipos son fabricados por líderes en la industria solar. Nuestros manufactureros nos reconocen y respaldan nuestras instalaciones (los manufactureros tratan a nuestros clientes VIP):

qcells

PANEL SOLAR
Top Q-Cells Installer en Latinoamérica.

TESLA

BATERÍA
Premier Installer 2023

Enphase Platinum Installer

INVERSOR
Platinum Installer de Enphase

ANDAMIAJE
Platinum Installer de Unirac.

Utilizamos el tamaño de cablería correcto según los códigos eléctricos y con la mejor tubería eléctrica para una larga duración y garantía de servicio. Todos los componentes que usamos son de Aluminio o Stainless Steel.

¡Esto te garantiza que todo tu trabajo estará en cumplimiento y certificado por manos expertas!

En WindMar Home, no subcontratamos ningún proceso. Realizamos todo internamente, asegurando la máxima calidad y control en cada etapa.

#1 EN GARANTÍAS Y SERVICIO:

Al evaluar una garantía, la preocupación principal es si esa compañía va existir cuando necesites reclamar la garantía. Parte del negocio de Windmar se dedica a ser dueño de sistema solares y venderle la energía a sobre 40 entidades diferentes bajo contratos de 20+ años. **Nosotros, sí, ¡vamos a estar aquí!**

- **Sobre 100 empleados full-time** en Servicio al Cliente y Servicio Técnico para sistemas ya instalados.
- ¡**Respondemos al mismo día** o al próximo día para emergencias, garantizado! Incluyendo fines de semana.

#1 EN FINANCIAMIENTOS:

WINDMAR ENERGY

Llevar a cabo tus proyectos nunca ha sido tan sencillo. Ofrecemos opciones de financiamiento diseñadas para adaptarse a tus necesidades, permitiéndote acceder a varios productos.

Oriental

Financiamiento Exclusivo de Oriental Bank. Único banco comercial con un prestamo solar en Puerto Rico.

¿POR QUÉ WINDMAR?

windmar HOME

Powerwall
Premier Certified Installer

SOMOS LA COMPAÑÍA DE ENERGÍA RENOVABLE MÁS GRANDE DEL CARIBE

NUESTRAS OFICINAS

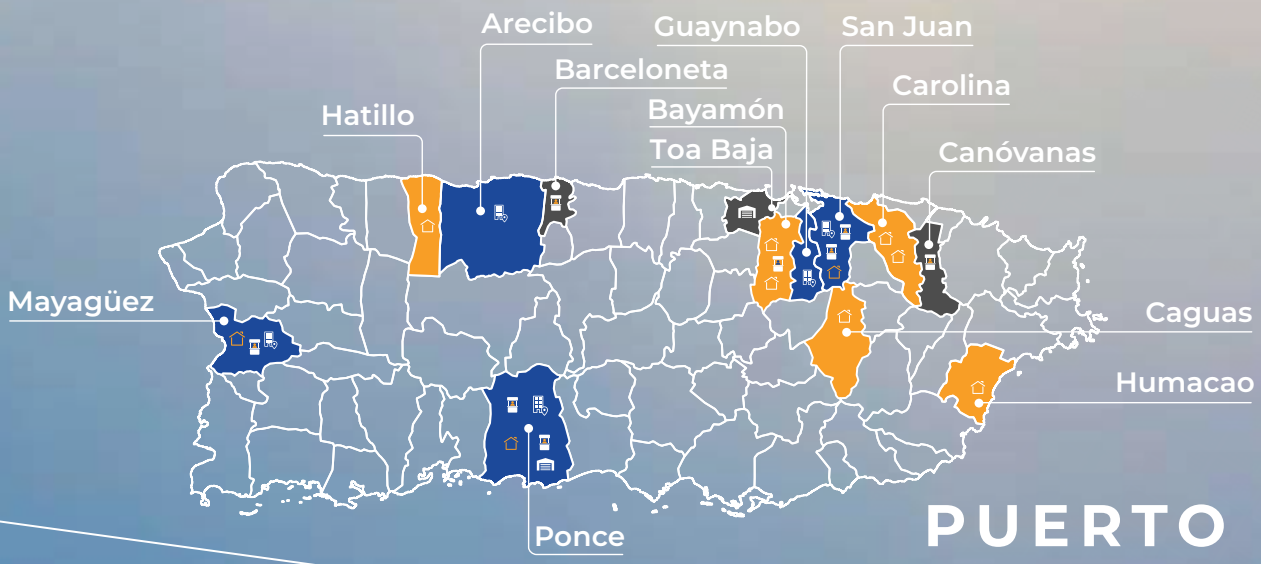

PUERTO RICO

FLORIDA

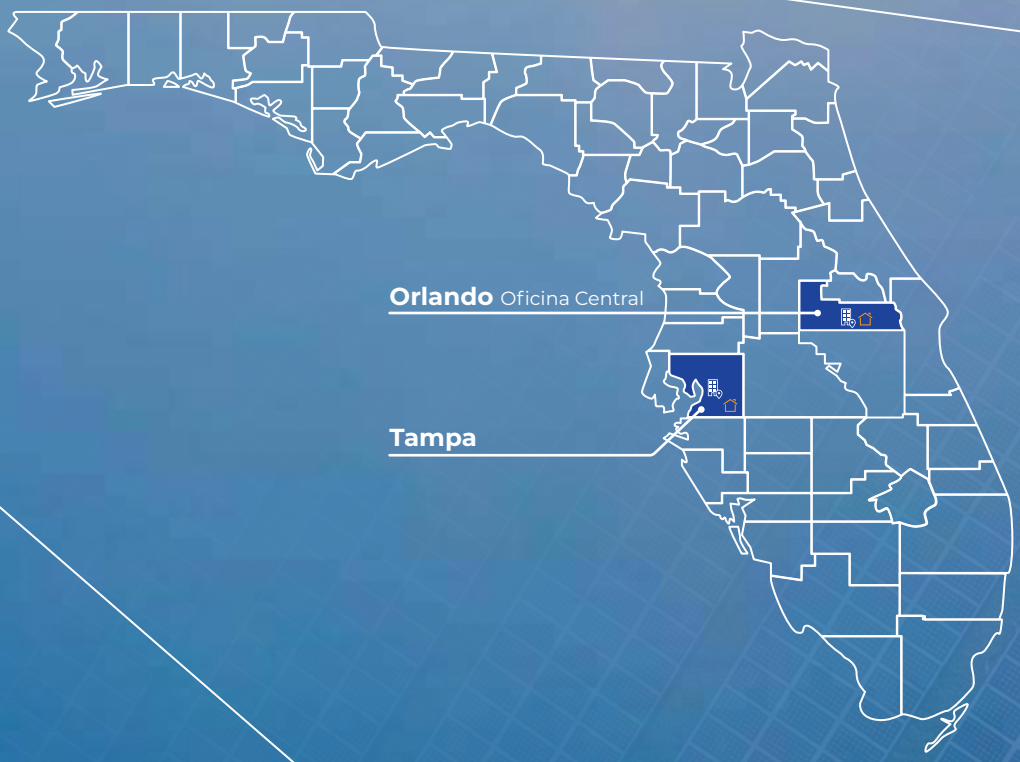

- Oficinas
- Almacenes
- The Home Depot
- Mall Booths

¿POR QUÉ WINDMAR?

windmar GROUP

NUESTRAS FACILIDADES

COTO LAUREL
PONCE, PUERTO RICO

SABANA SECA
TOA BAJA, PUERTO RICO

Q.PEAK DUO BLK ML-G10+ SERIES

qcells

395 - 415 Wp | 132 Cells
21.1 % Maximum Module Efficiency

MODEL Q.PEAK DUO BLK ML-G10.a+
Q.PEAK DUO BLK ML-G10+

Breaking the 21% efficiency barrier

Q.ANTUM DUO Z Technology with zero gap cell layout boosts module efficiency up to 21.1%.

A reliable investment

Inclusive 25-year product warranty and 25-year linear performance warranty[1].

Enduring high performance

Long-term yield security with Anti LeTID Technology, Anti PID Technology[2] and Hot-Spot Protect.

Extreme weather rating

High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (4000 Pa).

Innovative all-weather technology

Optimal yields, whatever the weather with excellent low-light and temperature behaviour.

The most thorough testing programme in the industry

Qcells is the first solar module manufacturer to pass the most comprehensive quality programme in the industry: The new "Quality Controlled PV" of the independent certification institute TÜV Rheinland.

[1] See data sheet on rear for further information.
[2] APT test conditions according to IEC / TS 62804-1:2015, method A (−1500 V, 96 h)

The ideal solution for:

Rooftop arrays on residential buildings

Q.PEAK DUO BLK ML-G10+ SERIES

▪ Mechanical Specification

Format	74.0 in × 41.1 in × 1.26 in (including frame) (1879 mm × 1045 mm × 32 mm)
Weight	48.5 lbs (22.0 kg)
Front Cover	0.13 in (3.2 mm) thermally pre-stressed glass with anti-reflection technology
Back Cover	Composite film
Frame	Black anodised aluminium
Cell	6 × 22 monocrystalline Q.ANTUM solar half cells
Junction box	2.09-3.98 in × 1.26-2.36 in × 0.59-0.71 in (53-101 mm × 32-60 mm × 15-18 mm), IP67, with bypass diodes
Cable	4 mm² Solar cable; (+) ≥72.04 in (1830 mm), (−) ≥72.04 in (1830 mm)
Connector	Stäubli MC4; IP68

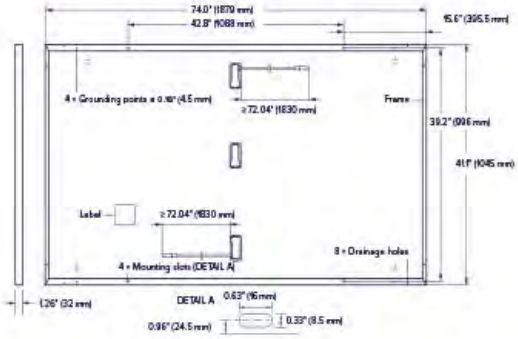

▪ Electrical Characteristics

POWER CLASS				395	400	405	410	415
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC[1] (POWER TOLERANCE +5 W / −0 W)								
Minimum	Power at MPP[1]	P_{MPP}	[W]	395	400	405	410	415
	Short Circuit Current[1]	I_{SC}	[A]	11.02	11.05	11.08	11.11	11.14
	Open Circuit Voltage[1]	V_{OC}	[V]	45.20	45.24	45.27	45.31	45.34
	Current at MPP	I_{MPP}	[A]	10.48	10.54	10.60	10.65	10.71
	Voltage at MPP	V_{MPP}	[V]	37.68	37.95	38.22	38.48	38.74
	Efficiency[1]	η	[%]	≥20.1	≥20.4	≥20.6	≥20.9	≥21.1
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT[2]								
Minimum	Power at MPP	P_{MPP}	[W]	296.4	300.1	303.9	307.6	311.4
	Short Circuit Current	I_{SC}	[A]	8.88	8.91	8.93	8.95	8.98
	Open Circuit Voltage	V_{OC}	[V]	42.63	42.66	42.69	42.73	42.76
	Current at MPP	I_{MPP}	[A]	8.25	8.30	8.35	8.40	8.45
	Voltage at MPP	V_{MPP}	[V]	35.93	36.16	36.39	36.61	36.84

[1]Measurement tolerances P_{MPP} ±3%; I_{SC}; V_{OC} ±5% at STC: 1000 W/m², 25±2 °C, AM 1.5 according to IEC 60904-3 • [2]800 W/m², NMOT, spectrum AM 1.5

Qcells PERFORMANCE WARRANTY

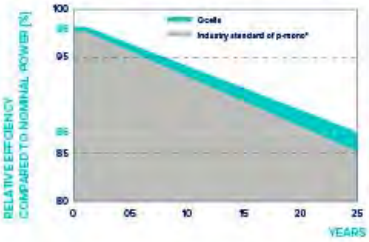

At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Qcells sales organisation of your respective country.

*Standard terms of guarantee for the 5 PV companies with the highest production capacity in 2021 (February 2021)

PERFORMANCE AT LOW IRRADIANCE

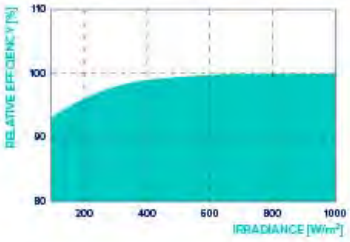

Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m²).

TEMPERATURE COEFFICIENTS

Temperature Coefficient of I_{SC}	α	[%/K]	+0.04	Temperature Coefficient of V_{OC}	β	[%/K]	−0.27
Temperature Coefficient of P_{MPP}	γ	[%/K]	−0.34	Nominal Module Operating Temperature	NMOT	[°F]	109±5.4 (43±3 °C)

▪ Properties for System Design

Maximum System Voltage	V_{SYS}	[V]	1000 (IEC)/1000 (UL)	PV module classification	Class II
Maximum Series Fuse Rating		[A DC]	20	Fire Rating based on ANSI/UL 61730	TYPE 2
Max. Design Load, Push/Pull[3]		[lbs/ft²]	75 (3600 Pa)/55 (2660 Pa)	Permitted Module Temperature on Continuous Duty	−40 °F up to +185 °F (−40 °C up to +85 °C)
Max. Test Load, Push/Pull[3]		[lbs/ft²]	113 (5400 Pa)/84 (4000 Pa)		

[3] See Installation Manual

▪ Qualifications and Certificates

UL61730-1 & UL61730-2, CE-compliant, Quality Controlled PV - TÜV Rheinland, IEC 61215:2016, IEC 61730:2016, U.S. Patent No. 9,893,215 (solar cells),

*Contact your Qcells Sales Representative for details regarding the module's eligibility to be Buy American Act (BAA) compliant.

Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.

Hanwha Q CELLS America Inc. 400 Spectrum Center Drive, Suite 1400, Irvine, CA 92618, USA | TEL +1 949 748 59 96 | EMAIL hqc-inquiry@qcells.com | WEB www.qcells.com

qcells

Specifications subject to technical changes © Qcells Q.PEAK_DUO_BLK_ML-G10+_series_395-415_DA_2023-12_Rev.06_NA