

57th CIRP Conference on Manufacturing Systems 2024 (CMS 2024)

# Digital twin based online material defect detection for CNC-milled workpieces

Johannes Kimmle<sup>a,b</sup>, Dominik Lucke<sup>a,c,\*</sup>, Konrad von Leipzig<sup>b</sup><sup>a</sup>ESB Business School, Reutlingen University, Alteburgstraße 150, 72762 Reutlingen, Germany<sup>b</sup>Department of Industrial Engineering, Stellenbosch University, Joubert Street, Stellenbosch, 7600, South Africa<sup>c</sup>Fraunhofer Institute for Manufacturing Engineering and Automation IPA, Nobelstraße 12, 70569 Stuttgart, Germany\* Corresponding author. Tel.: +49-7121-271-5005; fax: +49-7121-271-90-5005; E-mail address: [dominik.lucke@reutlingen-university.de](mailto:dominik.lucke@reutlingen-university.de)

## Abstract

Reliable lot-size-one compatible online quality monitoring for CNC machined parts remains elusive. To address this challenge, our approach aims to bridge the current gap in research by developing a cost-effective and reference-independent monitoring concept for material defect detection in CNC-machined parts. This paper presents a novel digital twin-based method, utilising machining vibrations and a g-code-based encoding of the cutting process. The objective is to detect material defects, such as blowholes, without the need for individual workpiece references. The proposed method aims to reduce barriers to entry, minimise waste, and enhance machine productivity by enabling automated early online quality control. To develop and validate the model, we generate a new dataset combining machining vibration with technological context data such as chip-shape. We demonstrate the feasibility and potential of the approach in a job shop setting on a 3-axis CNC mill.

© 2024 The Authors. Published by Elsevier B.V.

This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

Peer-review under responsibility of the scientific committee of the 57th CIRP Conference on Manufacturing Systems 2024 (CMS 2024).

**Keywords:** Online process monitoring; Material defect detection; Digital Twin

## 1. Introduction

The manufacturing industry is undergoing a paradigm shift, transitioning from a focus on responsiveness to a market-of-one, deemed Mass Individualisation[1] or Mass Personalisation [2]. This entails the production of custom-made products while maintaining the low unit costs traditionally associated with mass production. In response, there has been a global push towards smart manufacturing characterized by autonomous operations enabled by advanced sensing, data processing, and decision-making technologies. [3, 4]

Within this context, reducing lot sizes in job-shop settings becomes imperative,

... weg damit...

Within this context, reducing lot sizes in job-shop settings becomes imperative, and additive manufacturing (AM), particularly 3D printing, emerges as a promising solution due to its autonomy and versatility. However, despite its advantages, AM

still falls short compared to traditional techniques like CNC milling in aspects such as dimensional accuracy, mechanical properties, material variety, and surface quality [5]. CNC milling, therefore, remains pivotal, presenting not only significant potential but also high necessity for optimisation due to its complex nature of underlying processes that result in lower process resilience and robustness compared to AM.

### Nomenclature

CNC	Computerised Numerical Controlled (machine tool)
AM	Additive Manufacturing
ML	Machine Learning

A monitoring system that utilises deep process context (e.g. technological, geometric, or material property data) to generate reference agnostic - lot size one capable - process status insights, would ready CNC mills for the Mass Personalisation paradigm shift.

Such a workpiece-centred monitoring system, which detects material defects or operator errors (e.g. wrong material, or part

\* Corresponding author. Tel.: +49-7121-271-5005; fax: +49-7121-271-90-5005; E-mail address: [dominik.lucke@reutlingen-university.de](mailto:dominik.lucke@reutlingen-university.de)

clamping errors) during normal machining, can increase process efficiency & reliability, reduce waste, and enable higher product quality.

To achieve economic efficiency and general market accessibility, this lot-size-one capable system must be easy to integrate, machine-agnostic, and relatively low-cost.

## 2. Related work

Predominantly, CNC monitoring is focused on tool condition monitoring, particularly detecting tool wear and breakage, ensuring surface finish quality, including mitigating chatter, and monitoring machine health for predictive maintenance purposes [6, p.2727]. The following sensors are in use for CNC monitoring and are rated by investment cost and information value (see: Table 1).

Table 1. Sensors according to signals and properties [according to 6, p.2725]

Sensor	Level of investment cost	Extent of signal accuracy and information value
Dynamometer	•••••	•••••
Accelerometer	••••	•••
AE	••••	•••
Current/power	•	•
Temperature	•••	••
Sound	•	•

Dynamometers commonly utilise all six spatial axes (three translatory and three rotatory) to capture force profiles at high sampling rates, with higher rates correlating with increased cost. Vibrations measured by accelerometers refer to the oscillatory motion of an object or system around an equilibrium position ( $f_{acc} \lesssim 10$  kHz). AE refers specifically to the release of stress waves or energy due to internal changes or deformation within a material. AE is difficult to measure in lower frequencies; usual frequencies band is:  $20 \text{ kHz} \lesssim f_{AE} \lesssim 500 \text{ kHz}$ . [7, 8]

Current/power is measured from the drive unit of the spindle (and translates ruffly into spindle torque) and is therefore extremely cost effective. Temperature, mostly measured via thermal imaging cameras, lack high sample rates (due to low frame rates), and suffer from delays and perspective obstacles.

### 2.1. Similar monitoring solutions

Matta's Grey-1 model as shown in their paper [9] demonstrates AM process monitoring on fused layer deposit 3D printers, based on an automated deep process understanding. They trained a multi head transformer model on labeled images; labels such as: extrusion speed, layer thickness and hotend temperature. They are able to detect extrusions errors (which translate into material defects), or adjust printing parameters fully autonomously for unseen material. [9]

[10] investigates the cutting forces measured by a (6-axis) dynamometer in the micromanufacturing of Ti6246 alloy by comparing them with theoretically calculated forces, to detect material defects such as blowholes. This approach is in theory lot size one capable because the force measurement is not compared to a previously manufactured 1:1 reference, but rather is

based on experimental measurements and a geometric physics-based process simulation. It is concluded that the accuracy of the calculated force and the insufficient change in amplitude between normal and defect machining are too low to achieve automated detection. [10, p.169]

While dynamometer force measurements offer the highest signal accuracy and information value due to their direct measurement method and process proximity [11], they are expensive ( $\text{€}10^4$  magnitude), difficult to set up, and usually not feasible for production environments (compare Table 1).

Qass's Optimizer 4D, an off-the-shelf AE-based general-purpose inspection system, addresses the problems of dynamometers described above, at the cost of reduced signal accuracy. The system is still expensive, but it comes with out-of-the-box spectral pattern recognition, which enables reference-dependent material defect detection, thus is not lot size one capable. [12, p.5]

The current research gap in this field is concluded as follows:

- Research in online CNC workpiece quality monitoring remains relatively underexplored.
- Material defect detection represents a particular under-researched subfield.
- Only one single paper has been identified thus far that addresses reference-independent defect monitoring within this domain.

## 3. Approach

Digital twins provide a solution to fulfill the requirements listed at the end of section 1 in the scope of the research gap concluded in section 2, by enabling the combination of cost-effective retro-fit sensors that don't disturb machining and an encoding of the cutting process serving as contextual reference, to enable effective lot-size one monitoring.

alternativ...

Digital twins offer a solution to meet the requirements outlined at the end of Section 1 and address the research gap identified in Section 2. This is achieved by integrating affordable retrofit sensors that do not interfere with machining and encoding the cutting process for contextual reference, enabling efficient monitoring tailored to individual production runs.

### 3.1. Physical quantity to monitor

Vibrations measured via accelerometers or Acoustic Emission (AE) sensors form a great compromise between ease of installation & cost, and signal accuracy & information value. While Dynamometers entail greater information value, their high cost and poor mountability don't make them viable for general monitoring. Other options such as "current/power" "temperature" or "sound" hold lower information value and are therefore not considered.

The easily and cheaply achievable high sampling rates of vibration measurements are an enormous advantage when zooming in in the timedomain and analysing each cutting event (cutting edge engagement). As the paper [10] shows that especially

smaller/micro material defects affect machining forces for just a few edge engagements, lasting in total a few microseconds.

### 3.2. Machining-context features

Key aspect of our approach is to substitute a 1:1 reference of the same part manufactured prior, by general machining and cutting conditions and circumstances for each point in time in the manufacturing process, we call this data: context. To design our context features, we came up with 3 questions.

#### 1. What factors influence the cutting process?

- workpiece -geometry, -clamping, -material characteristics (e.g. e-module)
- tool -type (shape), -coating (surface), -cutting fluid
- machine -kinematics, -stiffness, -sub component noise
- cutting process on chip level (e.g. rake angle)
- general milling process (e.g. cutting speed:  $v_c$ )
- others: temperature, chip extraction, direction, etc.

The above factors affect the cutting process, some directly by influencing the load on the material being removed, ultimately resulting in a change in the vibration pattern. Others affect the process indirectly through resonance, e.g. slender workpiece geometries are excited at their natural frequency.

#### 2. How can the process be described as universally as possible by these factors?

Some factors can't be generalised, or are not feasible to do so. Those factors stay as static features that need specific learning later. Incomprehensible features e.g. "specific machine" can't be generalised because of their complex nature, therefore each machine needs custom learning. Other features are not feasible to generalize because they would make the model too complex: e.g. material characteristics can be explained by more general features such as hardness, tensile strength, etc. Due to the high number of material features, we decided to custom train each material. We have identified the following static features on which later learning is based: material, machine, clamping/fixtures, tool type, and cutting fluid.

Factors that are generalisable - where comprehensible and detachable features with general predication can be derived from - are preferred and form the backbone of deep process insights. E.g. cutting speed  $v_c$ , is machine, material and tool independent while having substantial influence on the cutting process, ultimately influencing sensor signal patterns.

Factors that require specific sensors in order to be captured, such as temperature, are excluded from the model to keep complexity manageable.

#### 3. How can these factors be modelled as mathematically independent (uncoupled, lower-dimensional) coefficients?

To achieve high quality training data interdependence or correlation among features is to be avoided. Most classical technological parameters are interdependent: e.g. infeed  $a_p[mm]$  is dependent on tool diameter  $d[mm]$ , that means by

changing the tool to a bigger diameter, the ratio from  $a_p$  and  $d$  changes. To fix this  $a_p$  needs dimensional reduction: from  $a_p[mm]$  to  $a_p/d[\%]$  removing the interdependence of  $d$ . Feed rate  $f$  is dependent on cutting speed  $v_c$  and tool diameter  $d$ . Uncoupled  $f$  translates into feed rate per tooth  $f_z$ .

We found the following independent coefficients: tool diameter  $d$ , cutting speed  $v_c$ , infeed percent  $a_{p\%}$ , cutting depth  $a_e$ , tool edge number  $z$ , direction, milling mode (climb or up-cut), spindle speed  $n$

Additional features are modelled to better describe the cutting context such as: contact arc (angle of attack where tool is in contact with workpiece), arc direction (direction vector of contact arc), chip volume, cutting frequency, Not all the considered factors can be fully modelled, so there is always some loss of information. Whether the remaining information is sufficient to model the cutting context is analysed in our proof-of-concept implementation.

The final context features are a mix of static features concluded in question 2 (e.g. material), independent coefficients (e.g. feed rate per tooth), as well as additionally modeled features (e.g. contact arc) from question 3.

### 3.3. Concept architecture

The general approach to the lot size one capable material defect monitoring integrates directly into common pre-existent production interfaces to enable easy machine agnostic retrofitting. The full concept architecture is shown in Fig. 2. The diagram centers around the "CNC Mill" including its "CNC Controller" in the bottom center. The process steps highlighted in bright green colour represent the standard information flow on the shop floor for CNC machines - no monitoring - just the pre-existent "Conventional Shop Procedure". The monitoring system integrates right on top of this procedure which can be subdivided into four "Monitoring Procedures" (grey boxes): "Signal Acquisition & Preparation", "Context Acquisition & Generation", "Signal Context Overlay", and "Contextualised Classification".

Inside those procedure boxes (bright green and grey) are dark blue coloured "Process Steps", specific functions that process information. Information flows in and out of these dark blue "Process Steps", this flow and exchange of information is visualised with arrows and rounded boxes in turquoise colour, we called them "Exchanged Information". See the diagram for details.

To detect defects while machining, the architecture is designed to be real-time capable. The "Conventional Shop Procedure" - except milling itself - and "Context Acquisition & Generation" procedures are deterministic and therefore can be calculated beforehand, all other procedures must be real time capable, including "Signal Acquisition", "Signal-Context Overlay" and the "Contextualised Classification".

### 3.4. ML architecture ???

- diagram mit high level ML (konzeptionell) - eher nett!
- realtime capability /

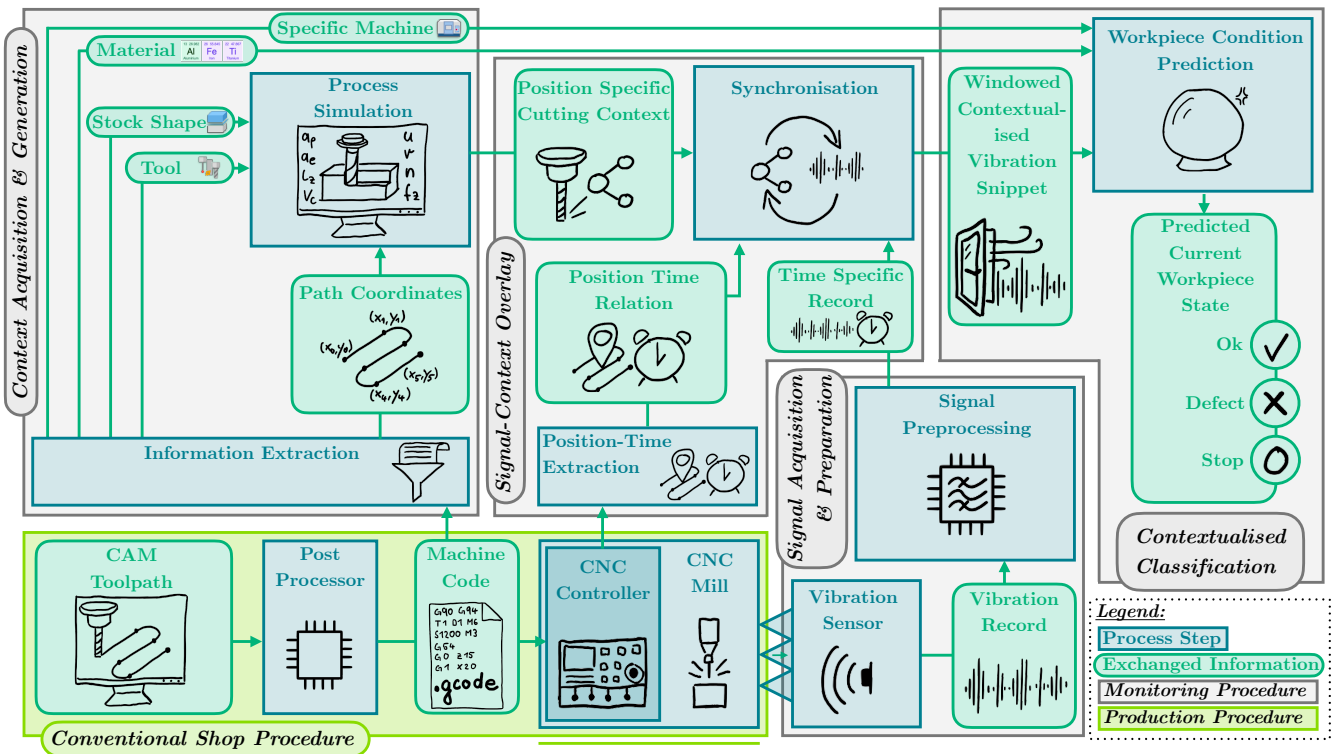


Fig. 1. High-Level Concept

- model diagram: con2D to MLP - separate training (1. abstraction, 2. classification)

As explained in section 3.3, "Contextual Classification" must be real-time capable. As part of that procedure the ML architecture is chosen accordingly. This means that in production the trained model is fed constantly with a fixed length of overlapping short vibration snippets ( $\sim 0.5s$  duration) and according context data specific to each vibration snippet.

As shown in Fig. ??

## 4. Implementation

### 4.1. Proof of concept

from full design concept to simplified proof of concept. DoE, welche context feature knnen heraus vereinfacht werden? - Maschinentyp=1, Werkstoff=1 ...

To validate the concept (from Chap. 3.3) a simplified version is implemented as prototype to answer if reference independent defect detection based on context data is possible and if so to which extent.

Contextual features essential for the production concept, yet easily abstracted, are omitted to prioritise features with influence-characteristics that are challenging to assess beforehand. For example, if reliable defect classification works on one type of machine, it is probable to perform similarly on another machine when trained on data specific to said machine. Given the rationale of the example above, features such as 'machine-

type' and 'material' are excluded from the prototype's contextual data. The feature 'stock shape' is believed to influence Eigen-frequencies, particularly on slender parts. To ensure explicit testability, only non-slender geometries are retained, leading to the rationalisation of the 'stock shape' feature. An example of a feature deemed relevant for the prototype, owing to the difficulty of generalizing it beforehand, is the 'contact-arc'.

DoE, static  
#Setup???

To prevent data imbalance, ensure broad coverage of context parameter values & combinations, and achieve a clean, reproducible dataset, a Design of Experiment (DoE) approach is employed. This involves creating a static dataset by defining the span of parameter values and their combinations as sets of Unique (context) Parameter Combinations (UPCs) beforehand. Based on the UPCs, stock shape, and defect-mode a CNC tool path is calculated and translated into machine code (gCode) to run on the CNC-mill. In detail this means that synthetic defects are placed at known locations on the prepared workpiece with an engraving end mill, that are then machined with preconfigured context data (UPCs). With this approach it is easy to test specific context parameter settings and automate datalabeling (defect & context labels), while ensuring precise defect label placement.

### 4.2. Dataset design

Datensatz dimension und umfang



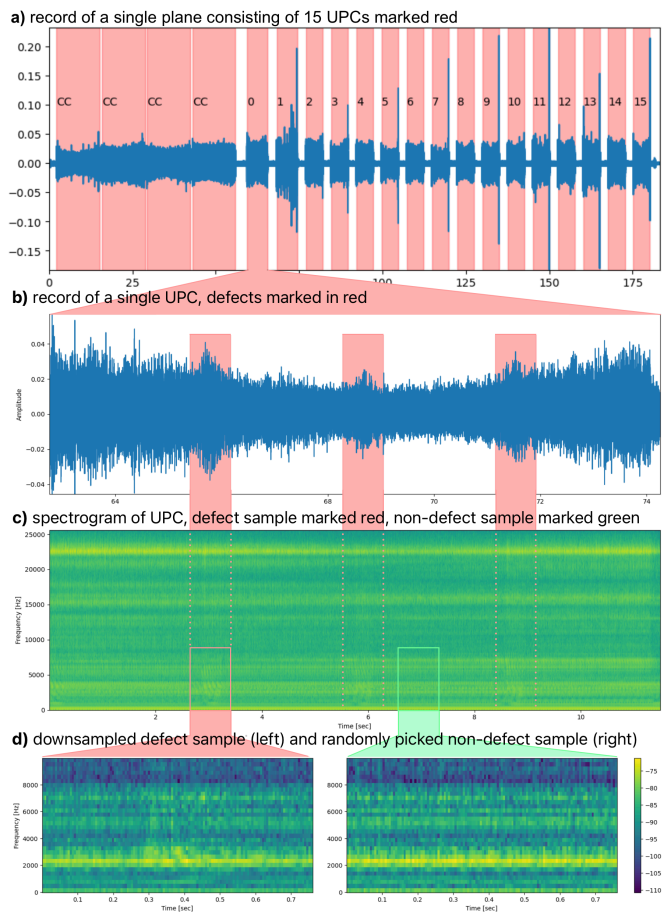


Fig. 2. High-Level Concept

### 4.3. Experiment pipeline nee eher net

### 4.4. Experiment setup

DoE -i static gocode lines (drawing) in python, auf emco, ...

### 4.5. ML model aspdfij

## 5. Validation

...and evaluation

## 6. Conclusion

and futere recommendation (halbe seite)

## References

- [1] Y. Lu, X. Xu, L. Wang, Smart manufacturing process and system automation – A critical review of the standards and envisioned scenarios, *Journal of Manufacturing Systems* 56 (2020) 312–325. [doi:10.1016/j.jmsy.2020.06.010](https://doi.org/10.1016/j.jmsy.2020.06.010).

- [2] Z. Qin, Y. Lu, Self-organizing manufacturing network: A paradigm towards smart manufacturing in mass personalization, *Journal of Manufacturing Systems* 60 (2021) 35–47. [doi:10.1016/j.jmsy.2021.04.016](https://doi.org/10.1016/j.jmsy.2021.04.016).
- [3] X. Gu, Y. Koren, Mass-Individualisation – the twenty first century manufacturing paradigm, *International Journal of Production Research* 60 (24) (2022) 7572–7587. [doi:10.1080/00207543.2021.2013565](https://doi.org/10.1080/00207543.2021.2013565).
- [4] Y. Lu, K. C. Morris, S. P. Frechette, Current Standards Landscape for Smart Manufacturing Systems, NIST.
- [5] T. Chen, Y.-C. Lin, Feasibility Evaluation and Optimization of a Smart Manufacturing System Based on 3D Printing: A Review, *International Journal of Intelligent Systems* 32 (4) (2017) 394–413. [doi:10.1002/int.21866](https://doi.org/10.1002/int.21866).
- [6] M. Kuntoğlu, E. Salur, M. K. Gupta, M. Sarıkaya, D. Y. Pimenov, A state-of-the-art review on sensors and signal processing systems in mechanical machining processes, *The International Journal of Advanced Manufacturing Technology* 116 (9) (2021) 2711–2735. [doi:10.1007/s00170-021-07425-4](https://doi.org/10.1007/s00170-021-07425-4).
- [7] J. Józwik, D. Mika, DIAGNOSTICS OF WORKPIECE SURFACE CONDITION BASED ON CUTTING TOOL VIBRATIONS DURING MACHINING, *Advances in Science and Technology Research Journal* 9 (2015) 57–65. [doi:10.12913/22998624/2365](https://doi.org/10.12913/22998624/2365).
- [8] S. Sun, X. Hu, W. Zhang, Detection of tool breakage during milling process through acoustic emission, *The International Journal of Advanced Manufacturing Technology* 109 (5) (2020) 1409–1418. [doi:10.1007/s00170-020-05751-7](https://doi.org/10.1007/s00170-020-05751-7).
- [9] D. A. J. Brion, S. W. Pattinson, Generalisable 3D printing error detection and correction via multi-head neural networks, *Nature Communications* 13 (1) (2022) 4654. [doi:10.1038/s41467-022-31985-y](https://doi.org/10.1038/s41467-022-31985-y).
- [10] D. Pfirrmann, J. Baumann, E. Krebs, D. Biermann, P. Wiederkehr, Material defects detection based on in-process measurements in milling of Ti6246

- alloy, *Procedia CIRP* 99 (2021) 165–170. doi:[10.1016/j.procir.2021.03.023](https://doi.org/10.1016/j.procir.2021.03.023).
- [11] M. E. Korkmaz, N. Yaşar, M. Günay, Numerical and experimental investigation of cutting forces in turning of Nimonic 80A superalloy, *Engineering Science and Technology, an International Journal* 23 (3) (2020) 664–673. doi:[10.1016/j.jestch.2020.02.001](https://doi.org/10.1016/j.jestch.2020.02.001).
- [12] P. Szulewski, D. Śniegulska-Gradzka, Systems of automatic vibration monitoring in machine tools, *Mechanik* 90 (3) (2017) 170–175. doi:[10.17814/mechanik.2017.3.37](https://doi.org/10.17814/mechanik.2017.3.37).