

TFM - μy Vs. y : Power spectrum plots

Joan Ribot Oliver


2026

Universidad de Cantabria

Binned Power Spectrum: Input data Vs. P-CILC

4 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu\text{K}\cdot\text{arcmin}$)


$\mu = 5 \times 10^{-4}$, freqs = [30, 40, 90, 150, 220, 270] GHz, $\ell_{\text{max}} = 3000$

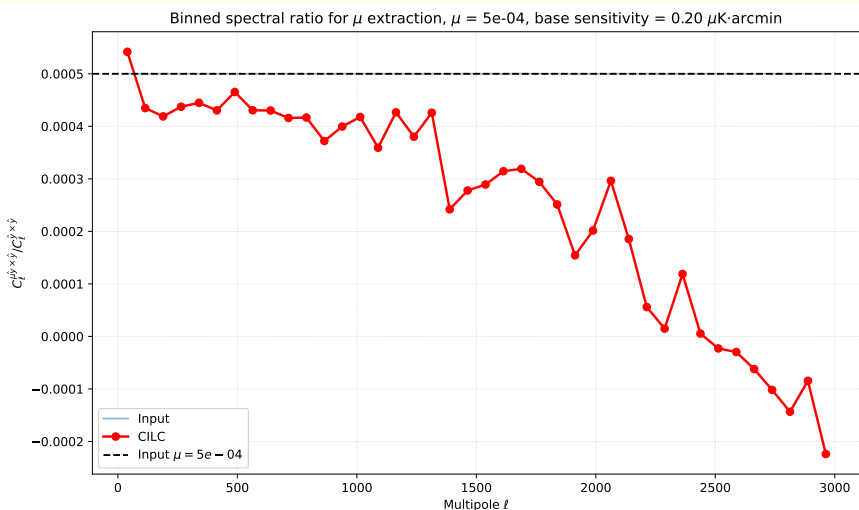

Binned Power Spectrum: Input data Vs. P-CILC

4 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu K \cdot \text{arcmin}$)


$\mu = 2 \times 10^{-4}$, freqs = [30, 40, 90, 150, 220, 270] GHz, $\ell_{\text{max}} = 3000$

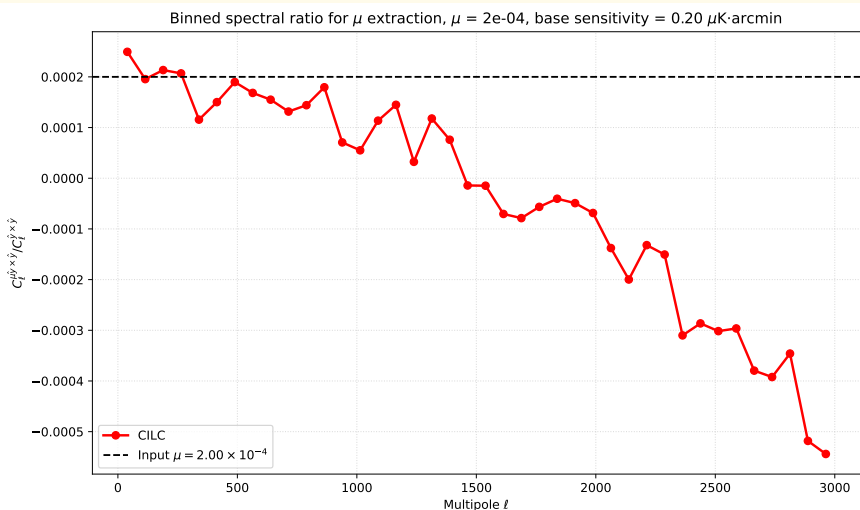

Binned Power Spectrum: Input data Vs. P-CILC

4 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu\text{K}\cdot\text{arcmin}$)


$\mu = 2 \times 10^{-4}$, freqs = [30, 40, 90, 150, 220, 270] GHz, $\ell_{\text{max}} = 1000$

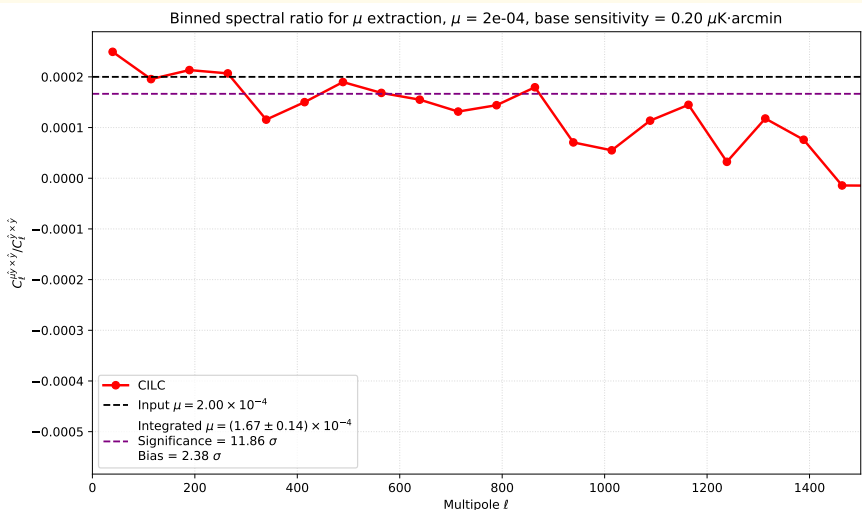

Binned Power Spectrum: Input data Vs. P-CILC

4 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu K \cdot \text{arcmin}$)


$\mu = 5 \times 10^{-5}$, freqs = [30, 40, 90, 150, 220, 270] GHz, $\ell_{\text{max}} = 3000$

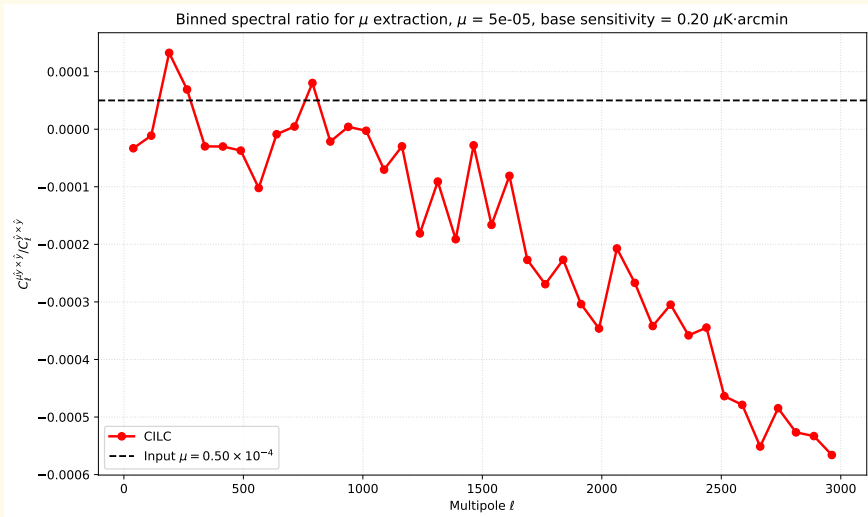

Binned Power Spectrum: Input data Vs. P-CILC

4 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu K \cdot \text{arcmin}$)


$\mu = 5 \times 10^{-5}$, freqs = [30, 40, 90, 150, 220, 270] GHz, $\ell_{\text{max}} = 1000$

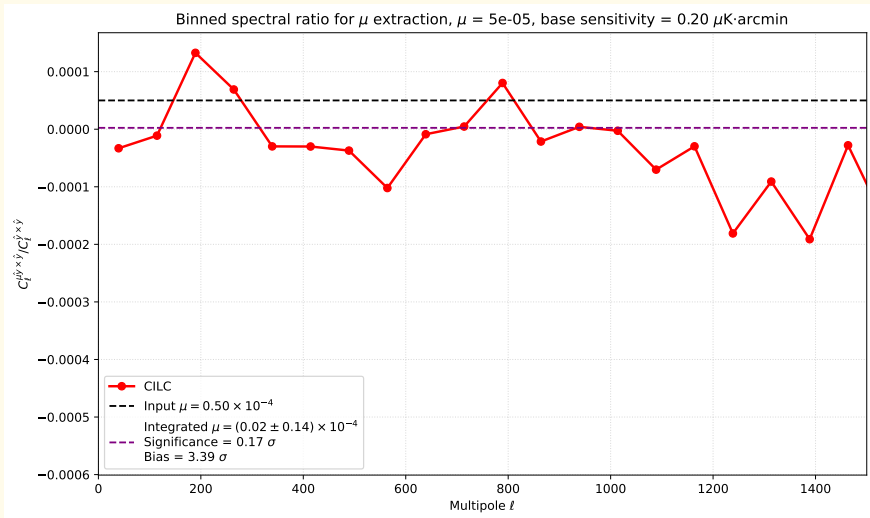

Binned Power Spectrum: Input data Vs. P-CILC

4 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu K \cdot \text{arcmin}$)


$\mu = 2 \times 10^{-5}$, freqs = [30, 40, 90, 150, 220, 270] GHz, $\ell_{\text{max}} = 3000$

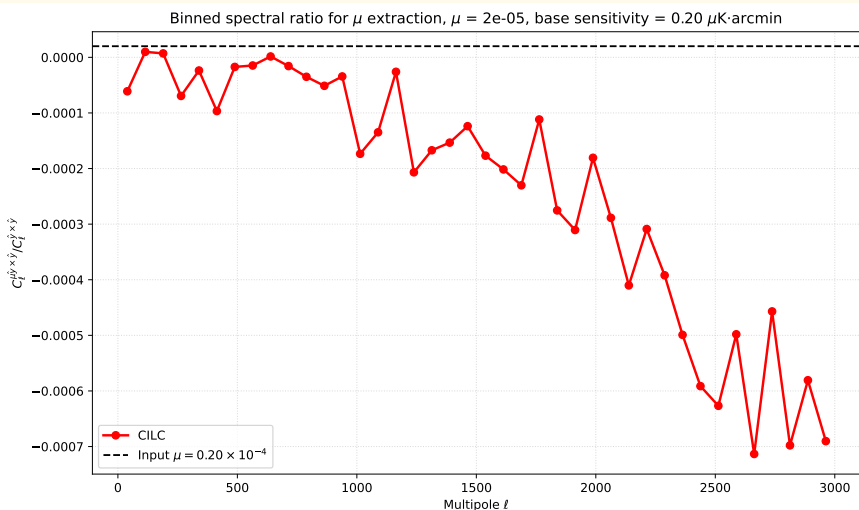

Binned Power Spectrum: Input data Vs. P-CILC

4 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu K \cdot \text{arcmin}$)


$\mu = 2 \times 10^{-5}$, freqs = [30, 40, 90, 150, 220, 270] GHz, $\ell_{\text{max}} = 1000$

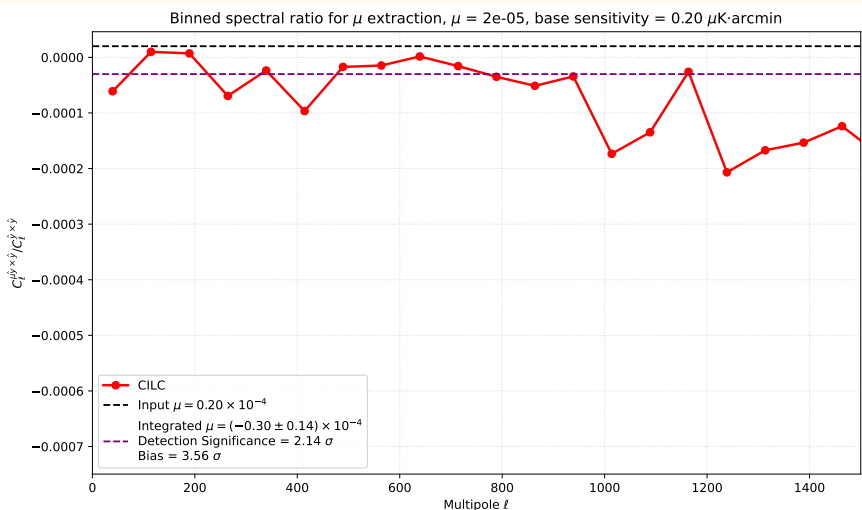

Binned Power Spectrum: Input data Vs. P-CILC

3 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu K \cdot \text{arcmin}$)


Null test: $\mu = 0$, freqs = [30, 40, 90, 150, 220, 270] GHz, $\ell_{\text{max}} = 3000$

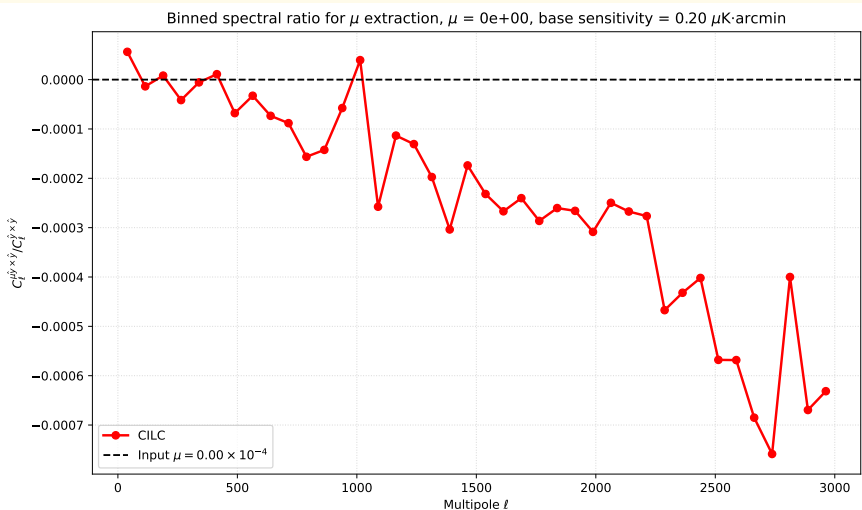

Binned Power Spectrum: Input data Vs. P-CILC

3 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu K \cdot \text{arcmin}$)


Null test: $\mu = 0$, freqs = [30, 40, 90, 150, 220, 270] GHz, $\ell_{\text{max}} = 1000$

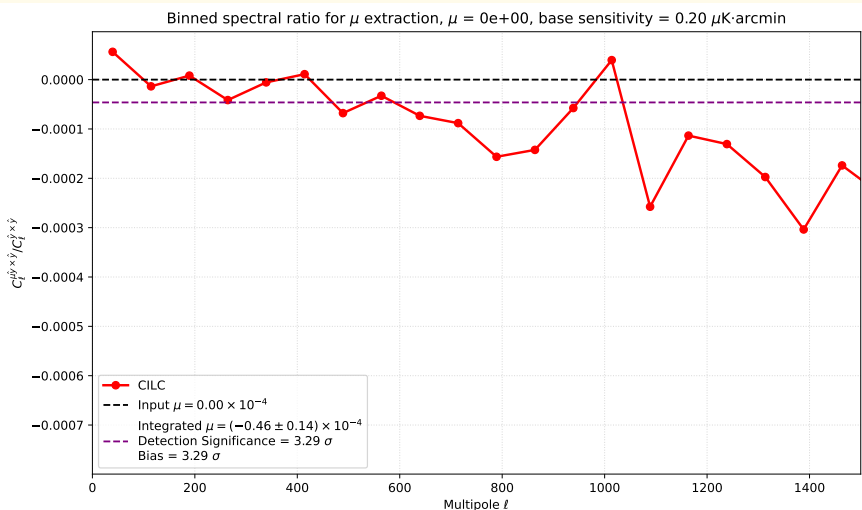

Binned Power Spectrum: Input data Vs. P-CILC

3 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu K \cdot \text{arcmin}$)

Null test: $\mu = 0$, freqs = *PICO*, $\ell_{\text{max}} = 3000$

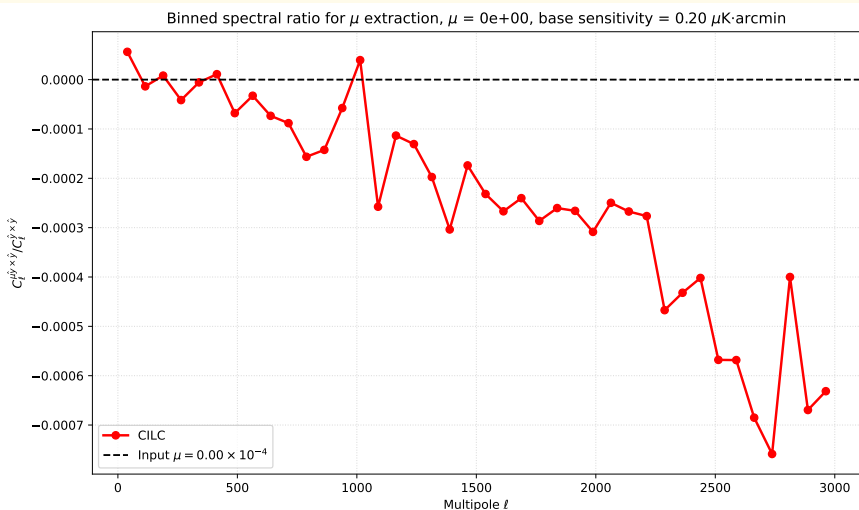

Binned Power Spectrum: Input data Vs. P-CILC

3 layers: tSZ, μ -distortion, CMB and noise ($0.2\mu K \cdot \text{arcmin}$)

Null test: $\mu = 0$, freqs = *PICO*, $\ell_{\text{max}} = 1000$

