

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A




B

C

D

E

F

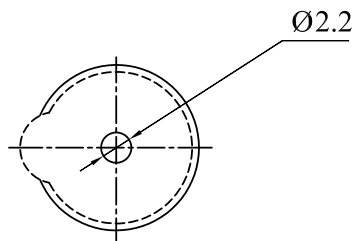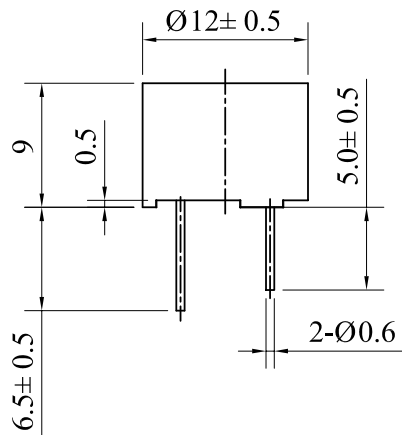

SPECIFICATION

1. Rated Voltage 5 V
2. Operating Voltage 4~8 V
3. Max. Rated Current 40mA
4. Coil Resistance $45 \pm 5 \Omega$
5. Coil Impedance 80Ω
6. Min. Sound Pressure Level 85dB/10cm
7. Resonant Frequency 2400Hz
8. Case Material PBT
9. Operating Temperature $-40 \sim +70^{\circ}\text{C}$
10. Store Temperature $-40 \sim +80^{\circ}\text{C}$
11. Weight 2g

No.	DESCRIPTION	APPROVED	DATE	Magnetic Buzzer CFD06	
TOLERANCES UNLESS NOTED OTHERWISE: .X ± .XX ± .XXX ± 90° FORMED ±2° ANGLES ±1°		APPROVALS	DATE		
DRAWN				UNIT	DWG NO.
CHECKED				mm	840.741
FIRST ANGLE PROJECTION		APPROVED	04.09.15	SCALE	SHEET
				NOT TO SCALE	VER 1.1

1 2 3 4 5 6 7 8