

Projeto final – Rede de Computadores Tarde 2024

Rede: 192.168.20.0

Gateway: 192.168.20.1

Interface externa: 172.16.63.248 255.255.248.0

Rota default: 0.0.0.0 0.0.0.0 172.16.63.254

Configurações:

--> IP Router porta G0/0: **192.168.20.1 255.255.255.0**

--> IP Router porta G0/1: **172.16.63.248 255.255.248.0**

Senhas utilizadas:

--> Console: **Cons0l3@134**


--> Enable: **Enabl3@134**

--> Host de acesso SSH: **senai**

Senha: **Senai*134**

--> Domain Name: **Senai.local**

1º Etapa: Criar a topologia no Cisco Packet Tracer

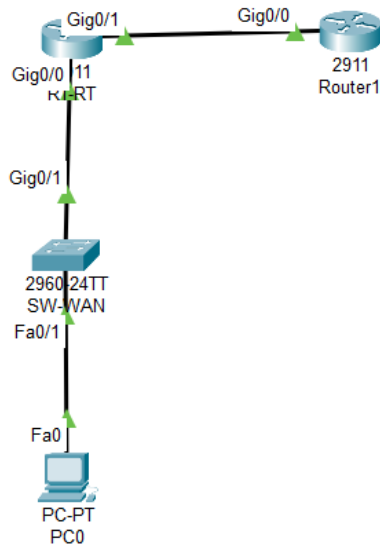

```
! Interface LAN (interno):
conf t
```

```
interface GigabitEthernet0/0
ip address 192.168.20.1 255.255.255.0
no shutdown
end
wr
```

```
! Interface WAN (externa):
conf t
interface GigabitEthernet0/1
ip address 172.16.63.248 255.255.248.0
no shutdown
end
wr
```

```
! Configuração de NAT
conf t
access-list 1 permit 192.168.20.0 0.0.0.255
ip nat inside source list 1 interface GigabitEthernet0/1 overload
end
wr
```

```
! Configuração da Rota Default:
conf t
ip route 0.0.0.0 0.0.0.0 172.16.63.254
end
wr
```

Script Switch:

```
en
conf t
hostname SW-WAN
banner motd "
```

```

+++++
+++++
+
+
AUTORIZADAS
+
PESSOAS NAO AUTORIZADAS DESCONECTAR
IMEDIATAMENTE
+
TODAS AS CONEXOES ESTAO SENDO MONITORADAS
E AUDITADAS
+
ATTENTION: AUTHORIZED PERSONAL ONLY.
+
DISCONNECT IMMEDIATELY.
```

+

+

++++
++++ "

line console 0

password Cons0l3@134

login

exit

enable secret Enabl3@134

ip domain-name Senai.local

crypto key generate rsa general-keys modulu 1024

username senai privilege 15 secret Senai*134

line vty 0 15


transport input SSH

do wr


end


3ª Etapa: Subir os scripts nos dispositivos

Router resetado:

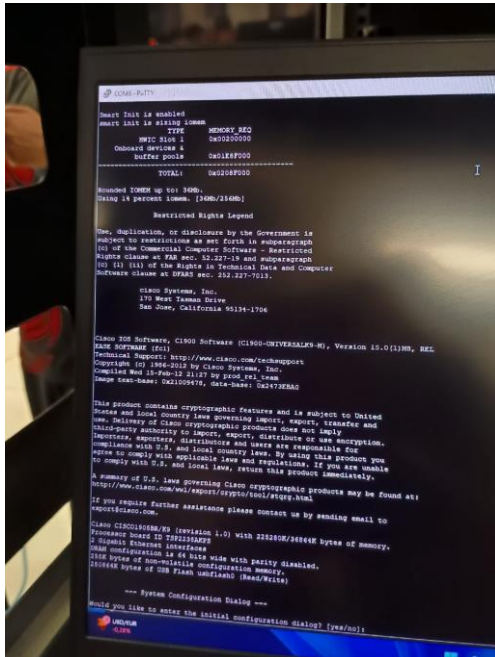


Show running após subir o script no Router:

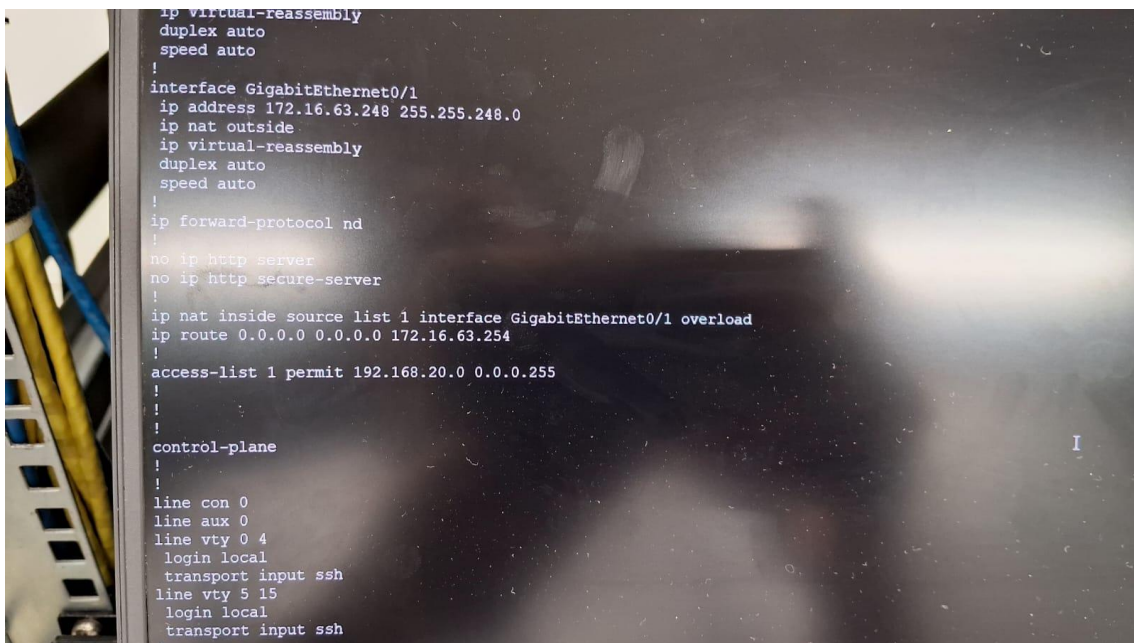

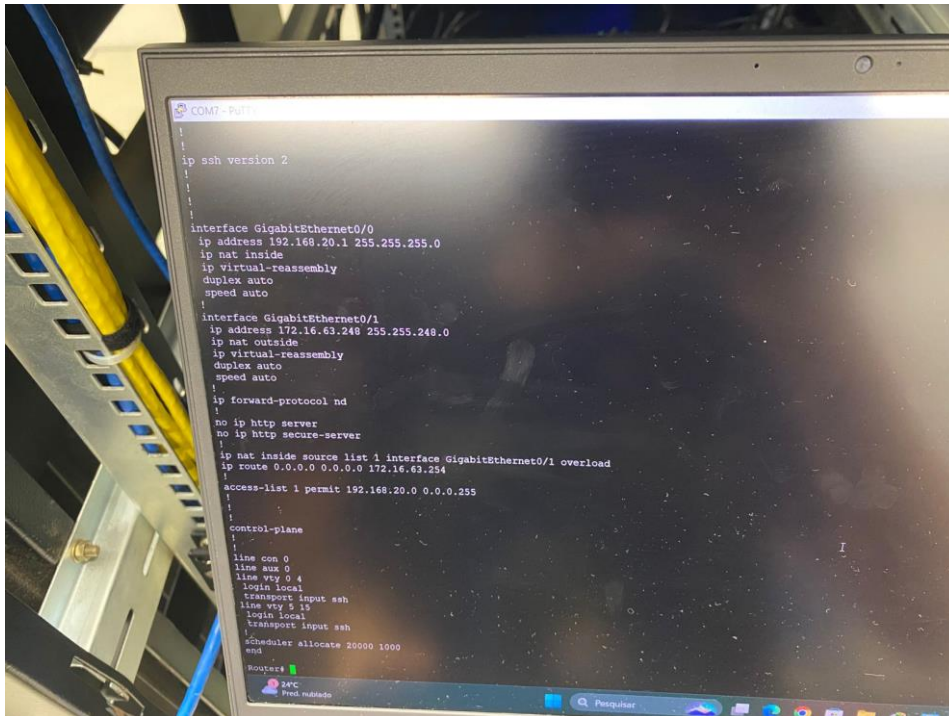

Ping:

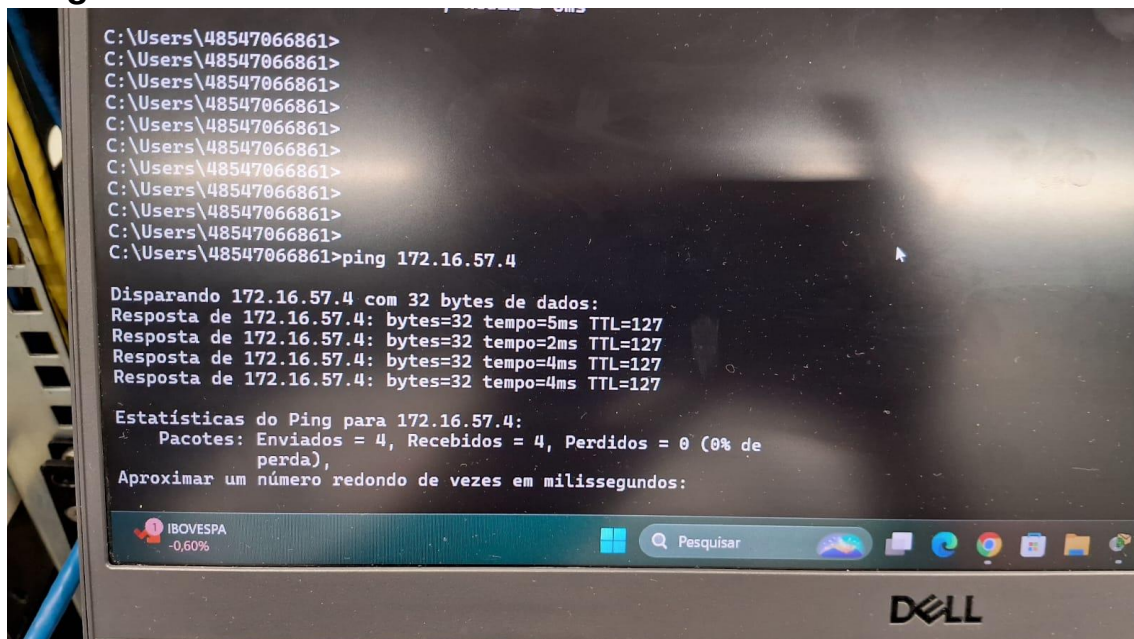

Topologia Física:



