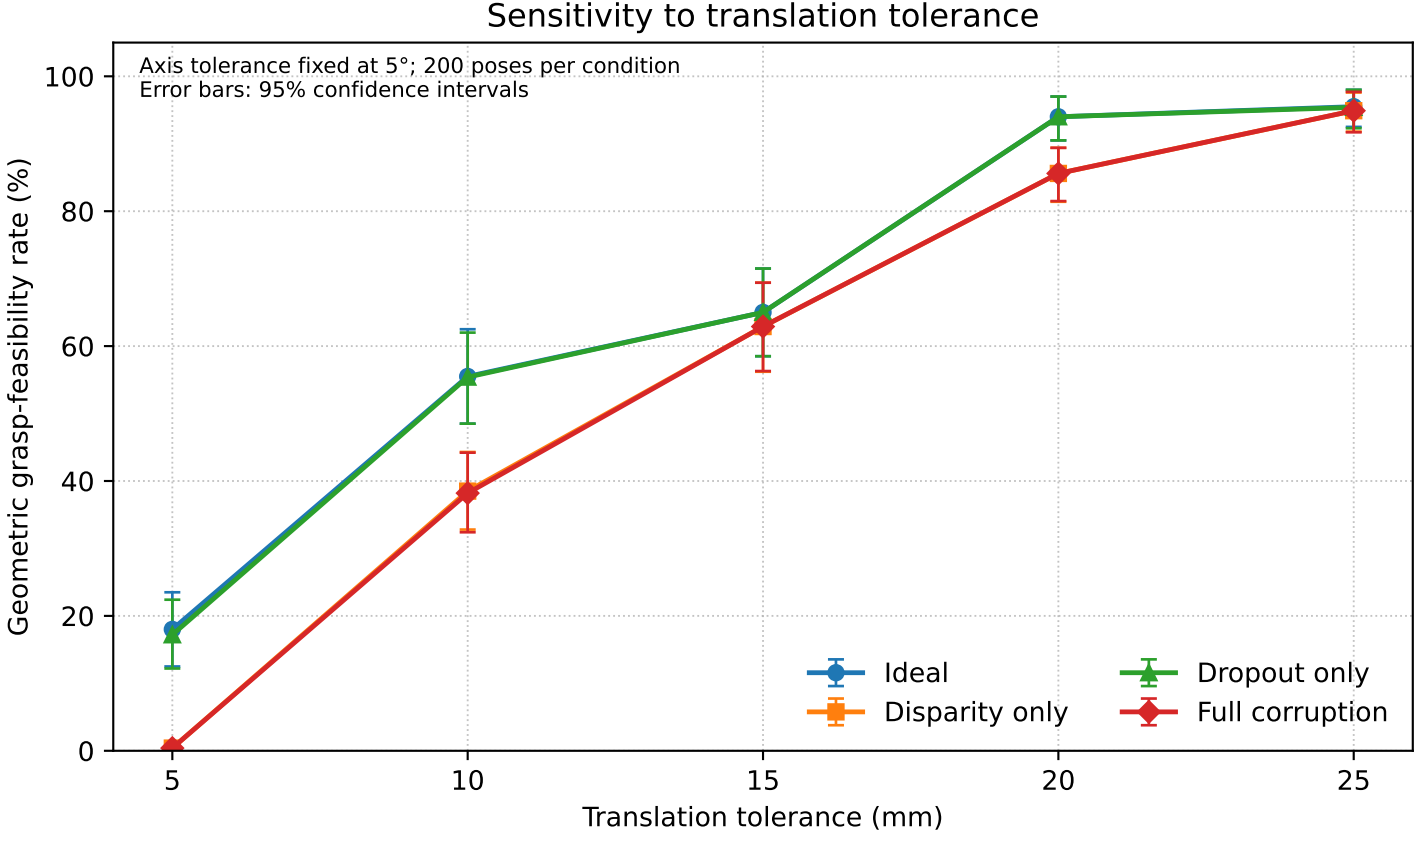
Sensitivity to translation tolerance
Axis tolerance fixed at 5°; 200 poses per condition
Error bars: 95% confidence intervals
Geometric grasp-feasibility rate (%)
Translation tolerance (mm)
0
20
40
60
80
100
5
10
15
20
25
Ideal
Disparity only
Dropout only
Full corruption