User Manual

Embedded Temp System

Agenda

01 Short overview

02 Preperation before start


03 Execute Program

04 Thema für die Präsentation hinzufügen

05 Thema für die Präsentation hinzufügen

01 Short overview

- The Embedded Temp System is realized in C-Code for PC.
- **Several real Hardware is replaced with “mocked HW”**
- The ADC Temp_Sensor is realized as csv file, where
  up to 11 values btw. 0V and 5V can be placed
- LEDs function is printed in coloured text on screen
- The EEPROM is realized as additional Software Module,
  where values/address are send to and Serial Number and
  HW-Rev is received
- The selection of the ADC temp sensor is calibratable via systemconstant also in a csv file

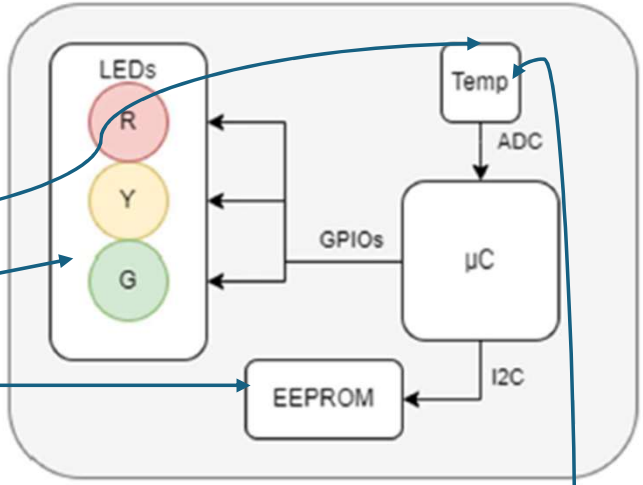

02 Preparetion before start

- Setting Adc Values in CSV file:
  - Open the csv file in folder \CAL_SENS_VAL
  - You can use 1st column and place 11 voltage values from 0V…5V
- Set Calibration constant to select Adc_Temp Sensor
  - Open the csv file in folder \CAL
  - You can use 2nd cell in 1st column and select between value “A” and “B” depending on sensor you want to us

03 Execute Program

- In folder \bin\Debug you find executable file
  - Embedded_Temp_Sys.exe
- Program will start with Init-Mode and then go to Run_Mode (11 – loops)
  - All calculations during program execution will be printed to screen