# SheetCut Pro · Workshop enclosure · example

10/29/2026, 11:50:43 PM · Selected alternative layout · Guillotine BSSF · area · cost / short

**2 sheets** **36 / 36 parts placed** **67.44% gross utilization** **2.0352 m² unused**

Finished area 4.2148 m² / gross allocated 6.25 m². Usable utilization 69.09%. Stock cost 184.

Independent contour length 49.96 m; selected cutting length 49.96 m; 36 contours; 36 estimated pierces; 144 contour segments; duration estimate 16.95 min.

Kerf 0.2 mm; extra spacing 1 mm; margins L/R/T/B 10 mm / 10 mm / 10 mm / 10 mm. Cutting speed 3,000 mm/min; pierce delay 0.5 sec; setup 0 min.


Finished dimensions; origin top-left, X right, Y down. Gross unused includes kerf, margins and remaining material. Estimates exclude lead-ins and rapid travel. Common-line not applied. Design geometry only; CAM and machine review required.

## Required parts

| ID | NAME | MATERIAL / THICKNESS | DIMENSIONS | QUANTITY | AREA |
|---|---|---|---|---|---|
| P-01 | Side panel | Mild steel / 2 mm | 620 mm × 420 mm | 6 | 1.5624 m² |
| P-02 | Rear panel | Mild steel / 2 mm | 800 mm × 300 mm | 4 | 0.96 m² |
| P-03 | Door blank | Mild steel / 2 mm | 410 mm × 280 mm | 8 | 0.9184 m² |
| P-04 | Mounting plate | Mild steel / 2 mm | 240 mm × 160 mm | 12 | 0.4608 m² |
| P-05 | Cross member | Mild steel / 2 mm | 580 mm × 90 mm | 6 | 0.3132 m² |

# Sheet 1 · ST-2500 · Mild steel 2 mm

2,500 mm × 1,250 mm · 21 parts · 89.75% utilization · 0.3202 m² gross unused

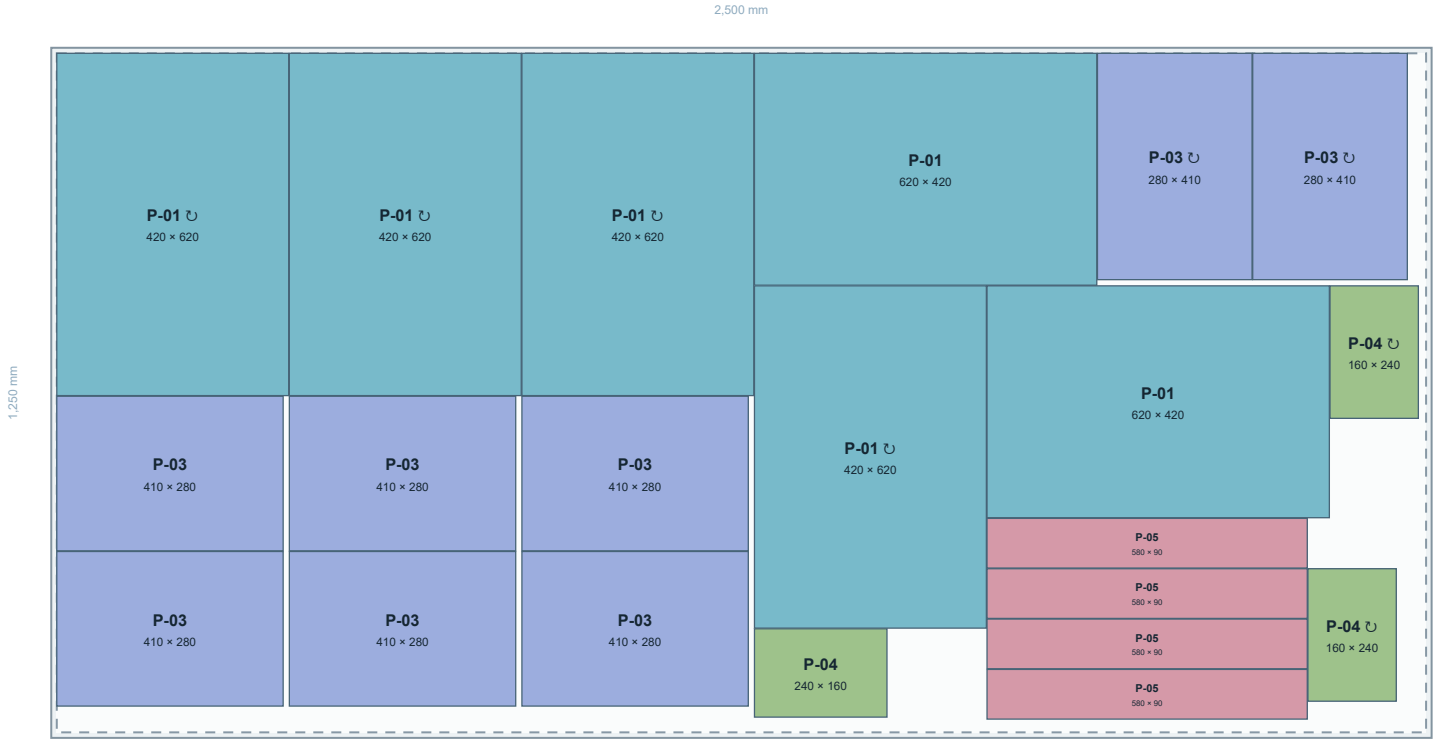



| PART | COPY | X | Y | WIDTH | HEIGHT | ROTATION |
|---|---|---|---|---|---|---|
| P-01 | 1 | 10 mm | 10 mm | 420 mm | 620 mm | 90° |
| P-01 | 2 | 431.2 mm | 10 mm | 420 mm | 620 mm | 90° |
| P-01 | 3 | 852.4 mm | 10 mm | 420 mm | 620 mm | 90° |
| P-01 | 4 | 1,273.6 mm | 10 mm | 620 mm | 420 mm | 0° |
| P-01 | 5 | 1,273.6 mm | 431.2 mm | 420 mm | 620 mm | 90° |

| PART | COPY | X | Y | WIDTH | HEIGHT | ROTATION |
|---|---|---|---|---|---|---|
| P-01 | 6 | 1,694.8 mm | 431.2 mm | 620 mm | 420 mm | 0° |
| P-03 | 1 | 1,894.8 mm | 10 mm | 280 mm | 410 mm | 90° |
| P-03 | 2 | 2,176 mm | 10 mm | 280 mm | 410 mm | 90° |
| P-03 | 3 | 10 mm | 631.2 mm | 410 mm | 280 mm | 0° |
| P-03 | 4 | 10 mm | 912.4 mm | 410 mm | 280 mm | 0° |
| P-03 | 5 | 431.2 mm | 631.2 mm | 410 mm | 280 mm | 0° |
| P-03 | 6 | 431.2 mm | 912.4 mm | 410 mm | 280 mm | 0° |
| P-03 | 7 | 852.4 mm | 631.2 mm | 410 mm | 280 mm | 0° |
| P-03 | 8 | 852.4 mm | 912.4 mm | 410 mm | 280 mm | 0° |
| P-05 | 1 | 1,694.8 mm | 852.4 mm | 580 mm | 90 mm | 0° |
| P-05 | 2 | 1,694.8 mm | 943.6 mm | 580 mm | 90 mm | 0° |
| P-05 | 3 | 1,694.8 mm | 1,034.8 mm | 580 mm | 90 mm | 0° |
| P-05 | 4 | 1,694.8 mm | 1,126 mm | 580 mm | 90 mm | 0° |
| P-04 | 1 | 2,316 mm | 431.2 mm | 160 mm | 240 mm | 90° |
| P-04 | 2 | 1,273.6 mm | 1,052.4 mm | 240 mm | 160 mm | 0° |
| P-04 | 3 | 2,276 mm | 943.6 mm | 160 mm | 240 mm | 90° |

# Sheet 2 · ST-2500 · Mild steel 2 mm

2,500 mm × 1,250 mm · 15 parts · 45.12% utilization · 1.715 m² gross unused

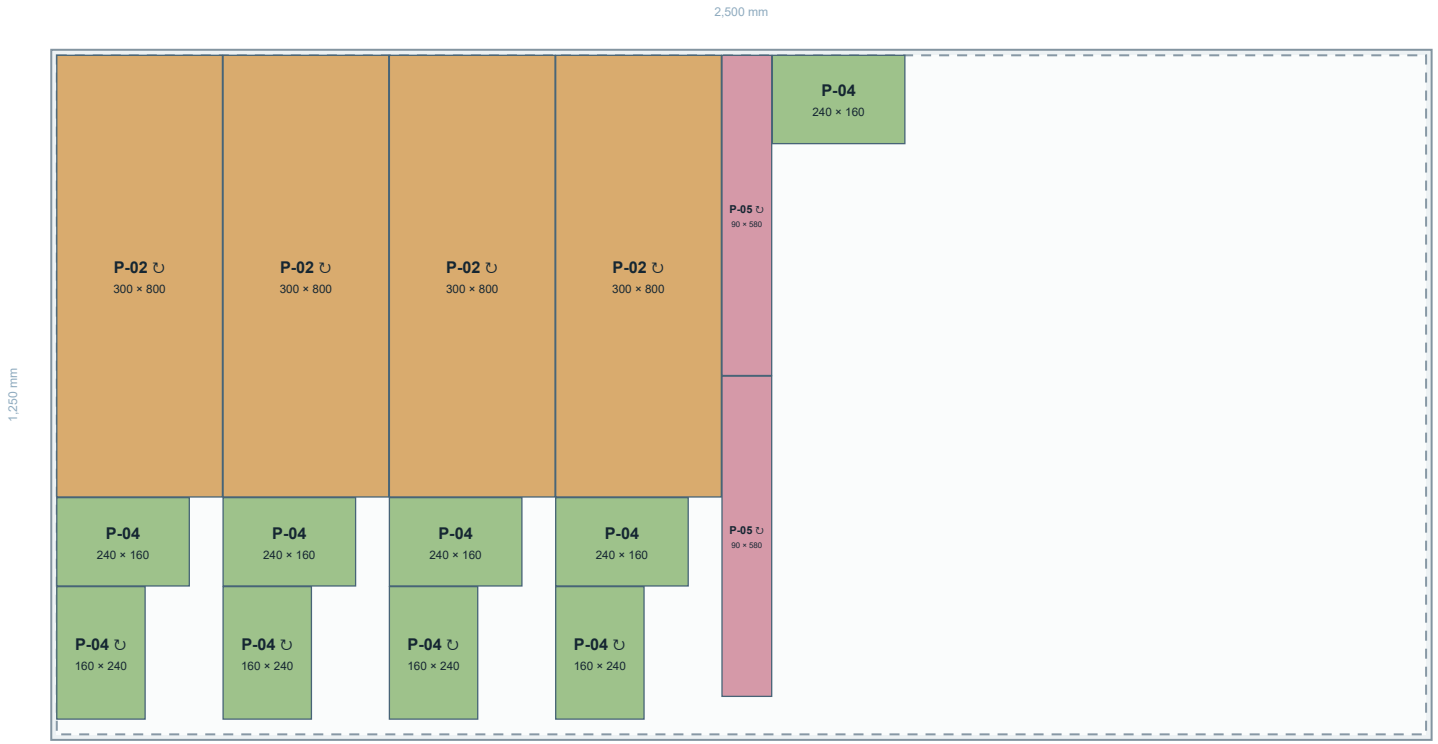


| PART | COPY | X | Y | WIDTH | HEIGHT | ROTATION |
|---|---|---|---|---|---|---|
| P-02 | 1 | 10 mm | 10 mm | 300 mm | 800 mm | 90° |
| P-02 | 2 | 311.2 mm | 10 mm | 300 mm | 800 mm | 90° |
| P-02 | 3 | 612.4 mm | 10 mm | 300 mm | 800 mm | 90° |
| P-02 | 4 | 913.6 mm | 10 mm | 300 mm | 800 mm | 90° |
| P-05 | 5 | 1,214.8 mm | 10 mm | 90 mm | 580 mm | 90° |

| PART | COPY | X | Y | WIDTH | HEIGHT | ROTATION |
|---|---|---|---|---|---|---|
| P-05 | 6 | 1,214.8 mm | 591.2 mm | 90 mm | 580 mm | 90° |
| P-04 | 4 | 10 mm | 811.2 mm | 240 mm | 160 mm | 0° |
| P-04 | 5 | 10 mm | 972.4 mm | 160 mm | 240 mm | 90° |
| P-04 | 6 | 311.2 mm | 811.2 mm | 240 mm | 160 mm | 0° |
| P-04 | 7 | 311.2 mm | 972.4 mm | 160 mm | 240 mm | 90° |
| P-04 | 8 | 612.4 mm | 811.2 mm | 240 mm | 160 mm | 0° |
| P-04 | 9 | 612.4 mm | 972.4 mm | 160 mm | 240 mm | 90° |
| P-04 | 10 | 913.6 mm | 811.2 mm | 240 mm | 160 mm | 0° |
| P-04 | 11 | 913.6 mm | 972.4 mm | 160 mm | 240 mm | 90° |
| P-04 | 12 | 1,306 mm | 10 mm | 240 mm | 160 mm | 0° |