SheetCut Pro · Workshop enclosure · example

10/29/2026, 11:32:39 PM · Selected alternative layout · Guillotine BSSF · area · cost / short

2 sheets **36 / 36 parts placed** **67.44% gross utilization** **2.0352 m² unused**

Finished area 4.2148 m² / gross allocated 6.25 m². Usable utilization 69.09%. Stock cost 184.

Independent contour length 49.96 m; selected cutting length 49.96 m; 36 contours; 36 estimated pierces; 144 contour segments; duration estimate 16.95 min.

Kerf 0.2 mm; extra spacing 1 mm; margins L/R/T/B 10 mm / 10 mm / 10 mm / 10 mm. Cutting speed 3,000 mm/min; pierce delay 0.5 sec; setup 0 min.


Finished dimensions; origin top-left, X right, Y down. Gross unused includes kerf, margins and remaining material. Estimates exclude lead-ins and rapid travel. Common-line not applied. Design geometry only; CAM and machine review required.

Required parts

ID	NAME	MATERIAL / THICKNESS	DIMENSIONS	QUANTITY	AREA
P-01	Side panel	Mild steel / 2 mm	620 mm × 420 mm	6	1.5624 m²
P-02	Rear panel	Mild steel / 2 mm	800 mm × 300 mm	4	0.96 m²
P-03	Door blank	Mild steel / 2 mm	410 mm × 280 mm	8	0.9184 m²
P-04	Mounting plate	Mild steel / 2 mm	240 mm × 160 mm	12	0.4608 m²
P-05	Cross member	Mild steel / 2 mm	580 mm × 90 mm	6	0.3132 m²

Sheet 1 · ST-2500 · Mild steel 2 mm

2,500 mm × 1,250 mm · 21 parts · 89.75% utilization · 0.3202 m² gross unused

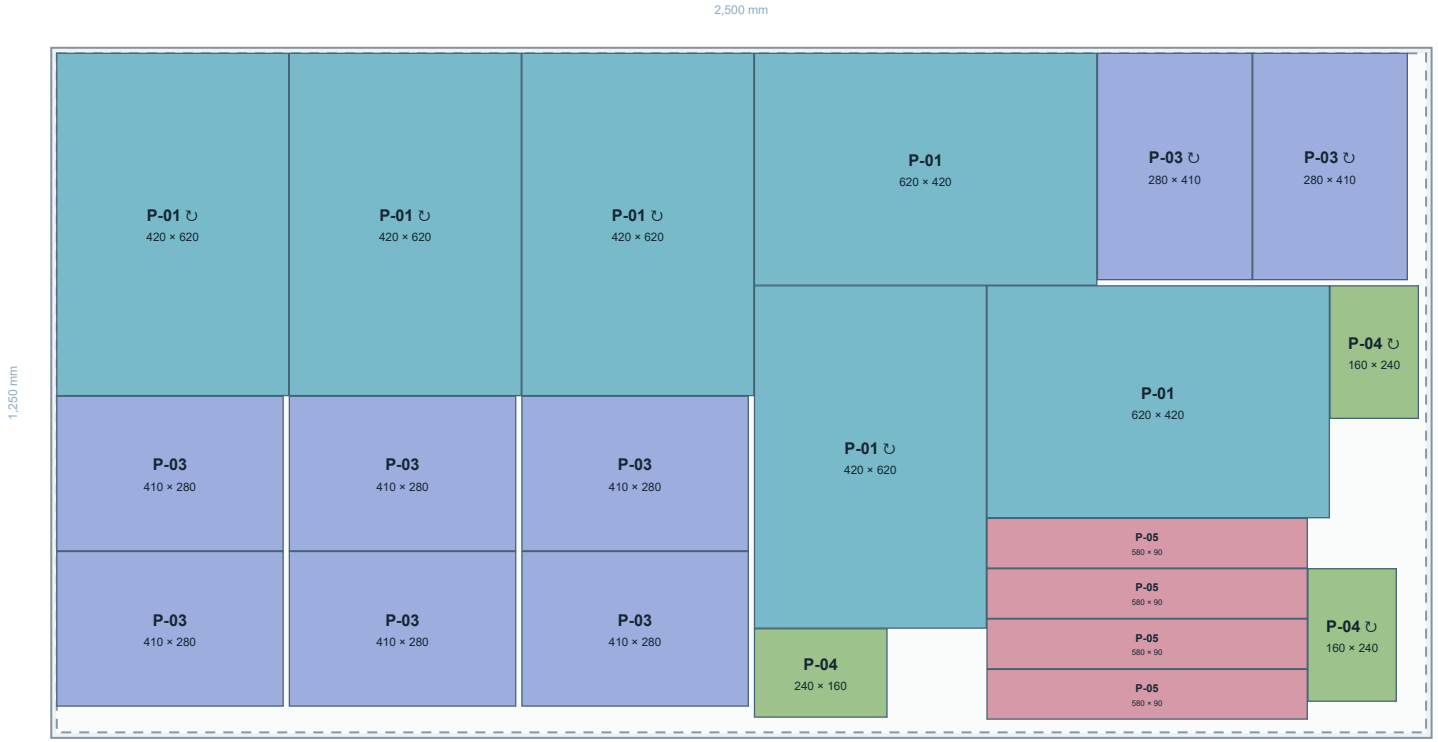


PART	COPY	X	Y	WIDTH	HEIGHT	ROTATION
P-01	1	10 mm	10 mm	420 mm	620 mm	90°
P-01	2	431.2 mm	10 mm	420 mm	620 mm	90°
P-01	3	852.4 mm	10 mm	420 mm	620 mm	90°
P-01	4	1,273.6 mm	10 mm	620 mm	420 mm	0°
P-01	5	1,273.6 mm	431.2 mm	420 mm	620 mm	90°

PART	COPY	X	Y	WIDTH	HEIGHT	ROTATION
P-01	6	1,694.8 mm	431.2 mm	620 mm	420 mm	0°
P-03	1	1,894.8 mm	10 mm	280 mm	410 mm	90°
P-03	2	2,176 mm	10 mm	280 mm	410 mm	90°
P-03	3	10 mm	631.2 mm	410 mm	280 mm	0°
P-03	4	10 mm	912.4 mm	410 mm	280 mm	0°
P-03	5	431.2 mm	631.2 mm	410 mm	280 mm	0°
P-03	6	431.2 mm	912.4 mm	410 mm	280 mm	0°
P-03	7	852.4 mm	631.2 mm	410 mm	280 mm	0°
P-03	8	852.4 mm	912.4 mm	410 mm	280 mm	0°
P-05	1	1,694.8 mm	852.4 mm	580 mm	90 mm	0°
P-05	2	1,694.8 mm	943.6 mm	580 mm	90 mm	0°
P-05	3	1,694.8 mm	1,034.8 mm	580 mm	90 mm	0°
P-05	4	1,694.8 mm	1,126 mm	580 mm	90 mm	0°
P-04	1	2,316 mm	431.2 mm	160 mm	240 mm	90°
P-04	2	1,273.6 mm	1,052.4 mm	240 mm	160 mm	0°
P-04	3	2,276 mm	943.6 mm	160 mm	240 mm	90°

Sheet 2 · ST-2500 · Mild steel 2 mm

2,500 mm × 1,250 mm · 15 parts · 45.12% utilization · 1.715 m² gross unused

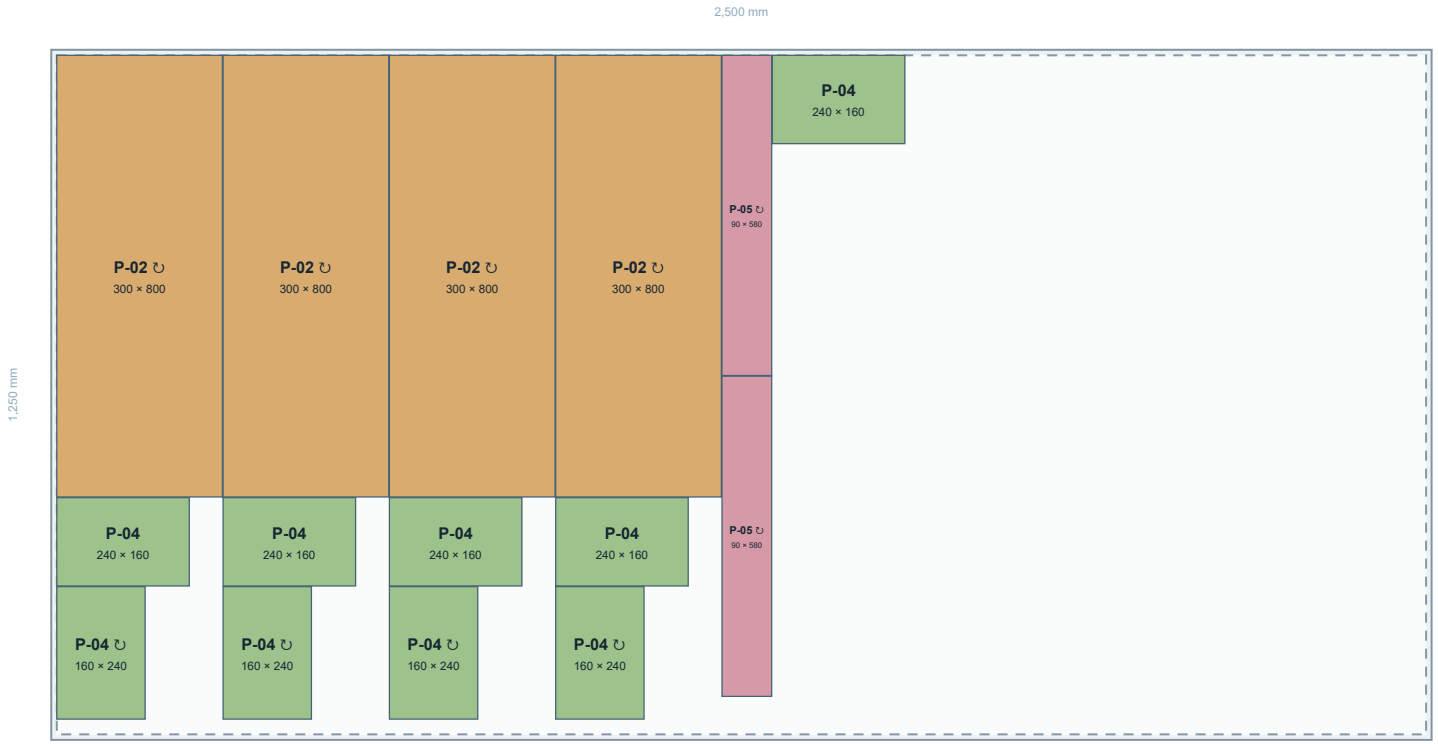

PART	COPY	X	Y	WIDTH	HEIGHT	ROTATION
P-02	1	10 mm	10 mm	300 mm	800 mm	90°
P-02	2	311.2 mm	10 mm	300 mm	800 mm	90°
P-02	3	612.4 mm	10 mm	300 mm	800 mm	90°
P-02	4	913.6 mm	10 mm	300 mm	800 mm	90°
P-05	5	1,214.8 mm	10 mm	90 mm	580 mm	90°

PART	COPY	X	Y	WIDTH	HEIGHT	ROTATION
P-05	6	1,214.8 mm	591.2 mm	90 mm	580 mm	90°
P-04	4	10 mm	811.2 mm	240 mm	160 mm	0°
P-04	5	10 mm	972.4 mm	160 mm	240 mm	90°
P-04	6	311.2 mm	811.2 mm	240 mm	160 mm	0°
P-04	7	311.2 mm	972.4 mm	160 mm	240 mm	90°
P-04	8	612.4 mm	811.2 mm	240 mm	160 mm	0°
P-04	9	612.4 mm	972.4 mm	160 mm	240 mm	90°
P-04	10	913.6 mm	811.2 mm	240 mm	160 mm	0°
P-04	11	913.6 mm	972.4 mm	160 mm	240 mm	90°
P-04	12	1,306 mm	10 mm	240 mm	160 mm	0°