

Regulation of Mechanical Properties of Diene Rubber Cured by Oxa-Michael Reaction via Manipulating Network Structure

Xuhui Zhang, Zhenghai Tang, Baochun Guo*

Department of Polymer Materials and Engineering, South China University of
Technology, Guangzhou 510640, China

E-mail: psbcguo@scut.edu.cn

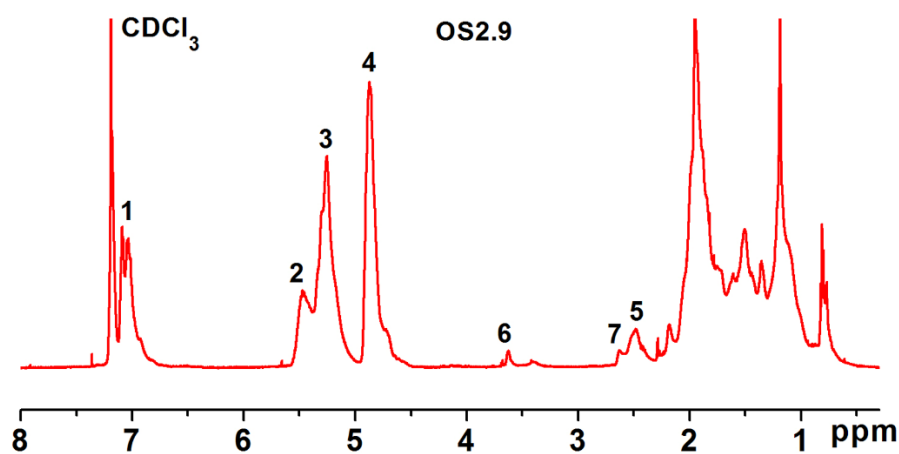


Figure S1. ¹H NMR of OS2.9

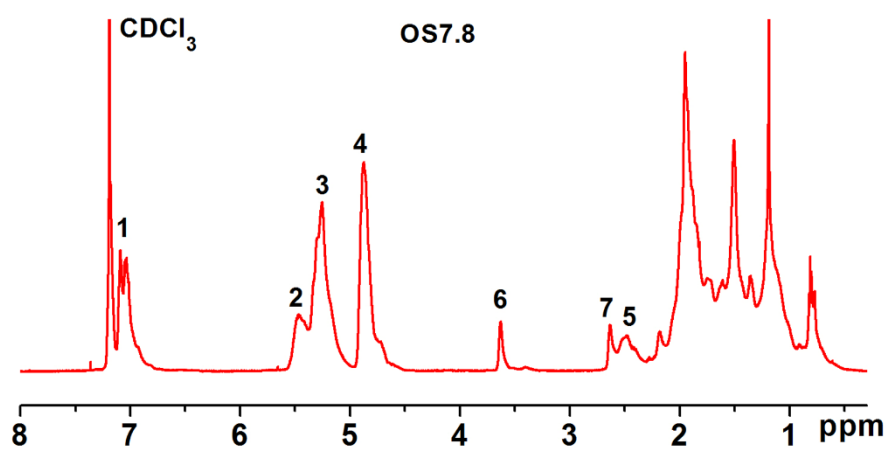


Figure S2. ¹H NMR of OS7.8

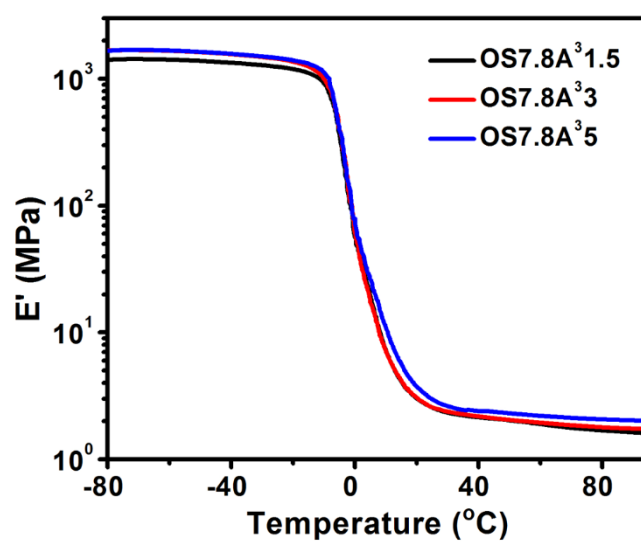


Figure S3. Storage modulus (E')-T curves of OS7.8 cured by various amount of A^3 .

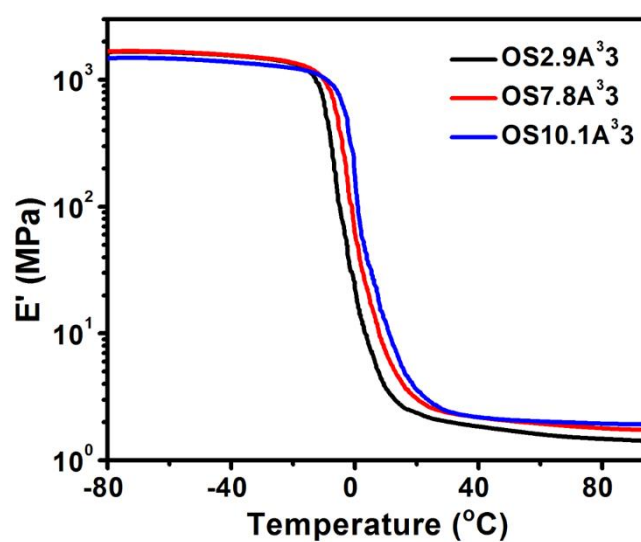


Figure S4. E' -T curves of OSx cured by A^3 (3 phr).

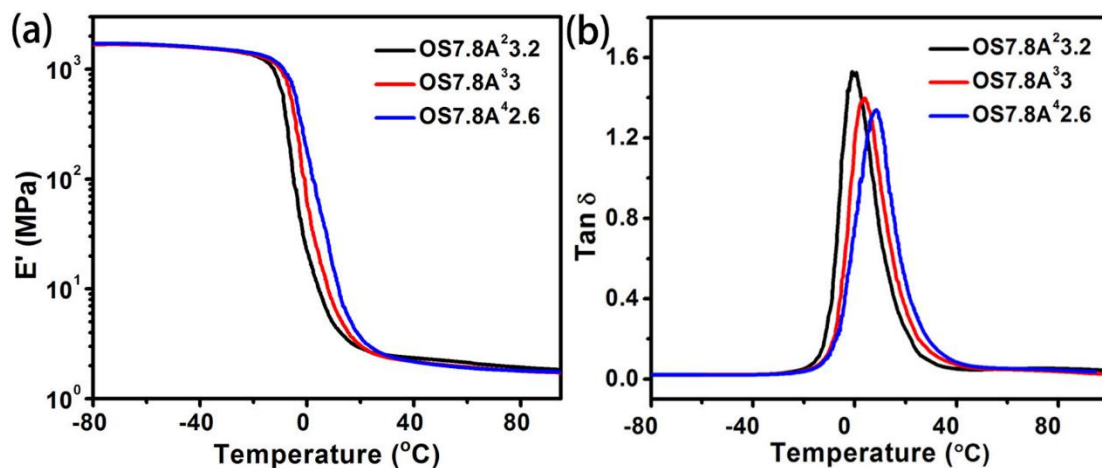


Figure S5. The temperature dependence of storage modulus (a) and loss factor (b) of OS7.8 cured by acrylates with different functionality.

Table S1. Curing parameters of OSxA^wz samples

Code	Tc10 (s)	Tc90 (s)	M _L (N.dm)	M _H (N.dm)
OS7.8A ³ 3-140 °C	234	2833	3.05	9.21
OS7.8A ³ 3-150 °C	120	2262	2.73	9.97
OS7.8A ³ 3-160 °C	54	1154	2.25	10.28
OS7.8A ³ 3-170 °C	38	860	2.42	10.03
OS7.8A ³ 1.5	52	1203	2.12	7.51
OS7.8A ³ 5	50	1198	2.31	12.87
OS2.9A ³ 3	77	1566	0.78	6.83
OS10.1A ³ 3	49	1048	3.01	11.54
OS7.8A ² 3.2	73	1457	2.29	8.20
OS7.8A ⁴ 2.6	43	943	2.53	11.60