
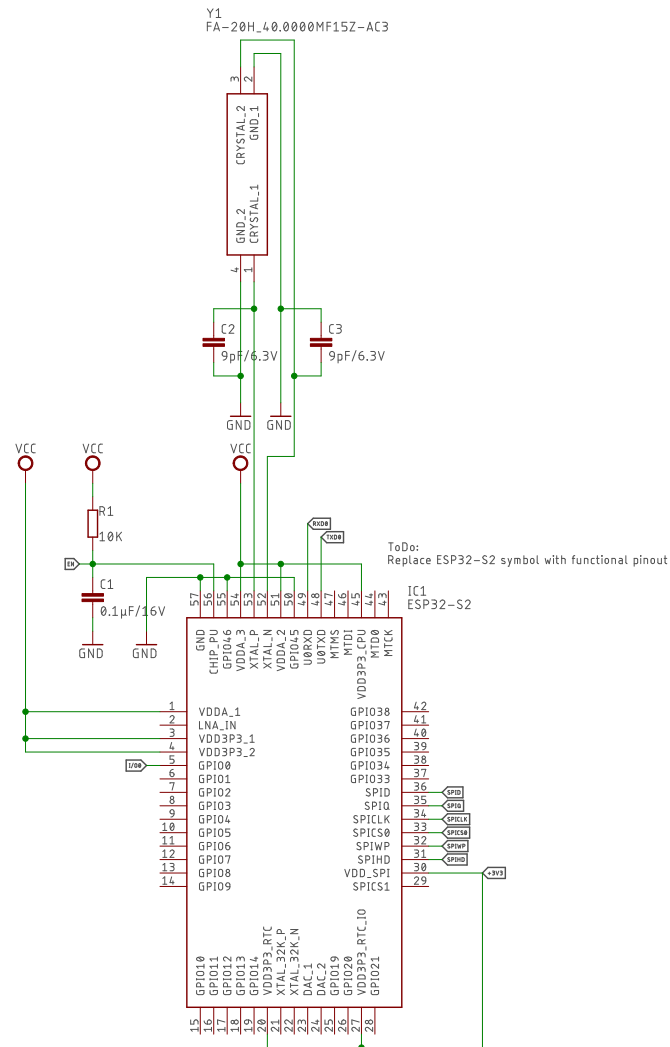


VCC = 3.3VDC


ESP32-S2:
Configured for "Download Mode"

Calibration Header & Programming Header




ToDo:
Replace ESP32-S2 symbol with functional pinout


Flash memory for µC

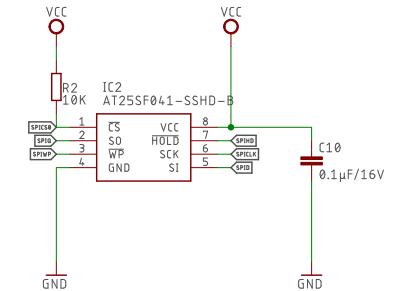


Decoupling Capacitors

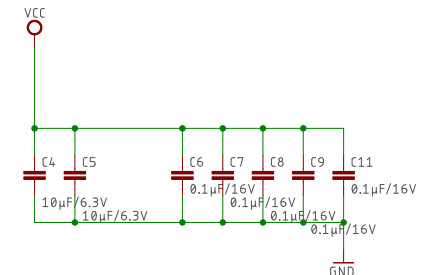

Microphone emulation

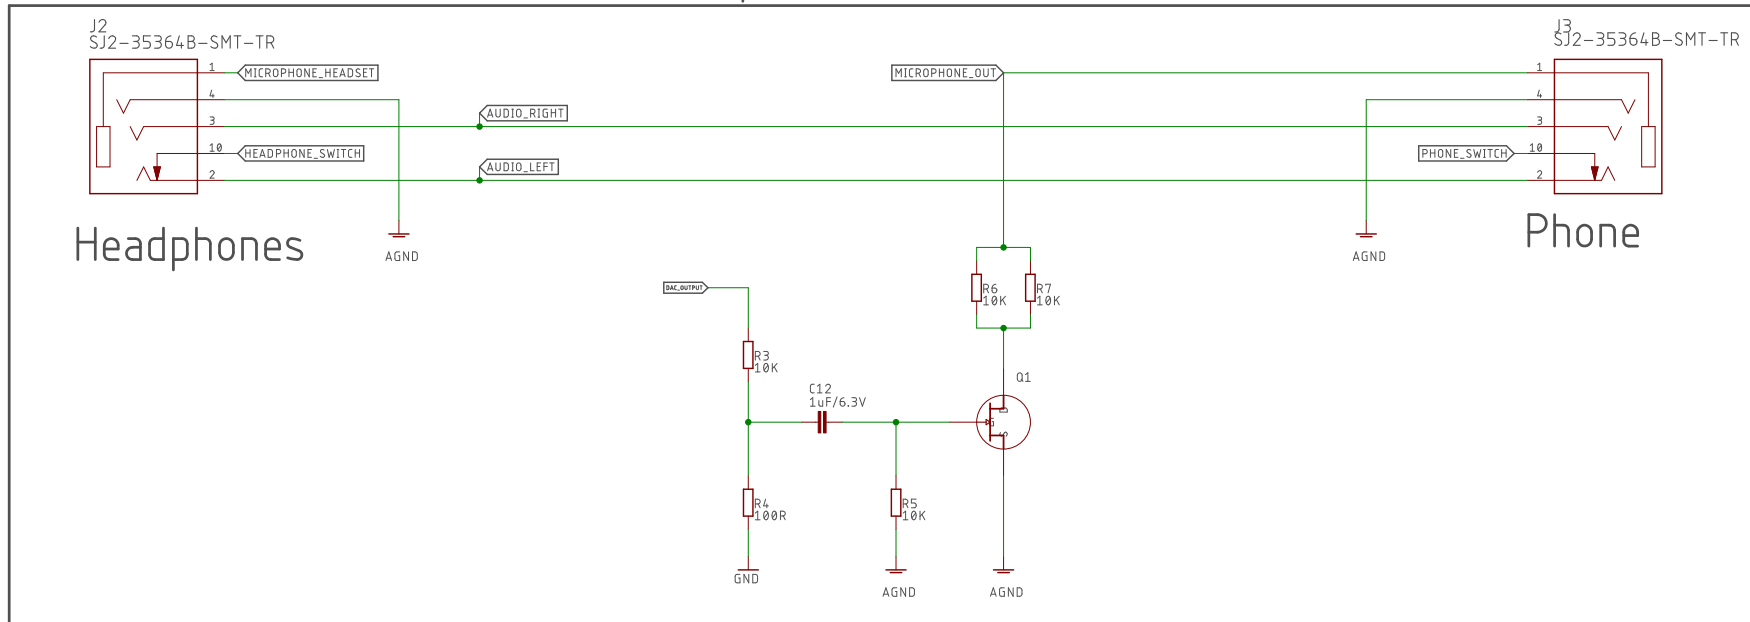

PCB Microphone adjustment

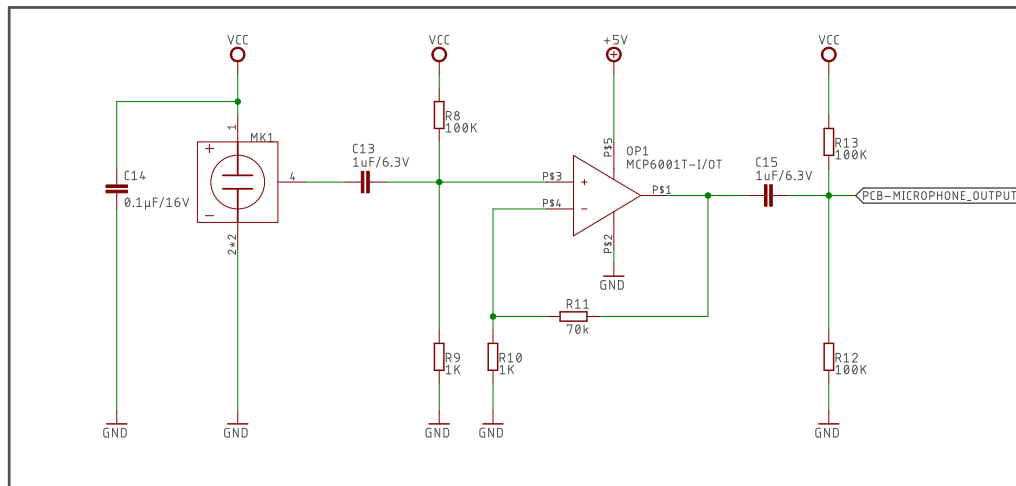

Check if grounding is correct

