


Expected AC-power prediction accuracy by irradiance representation

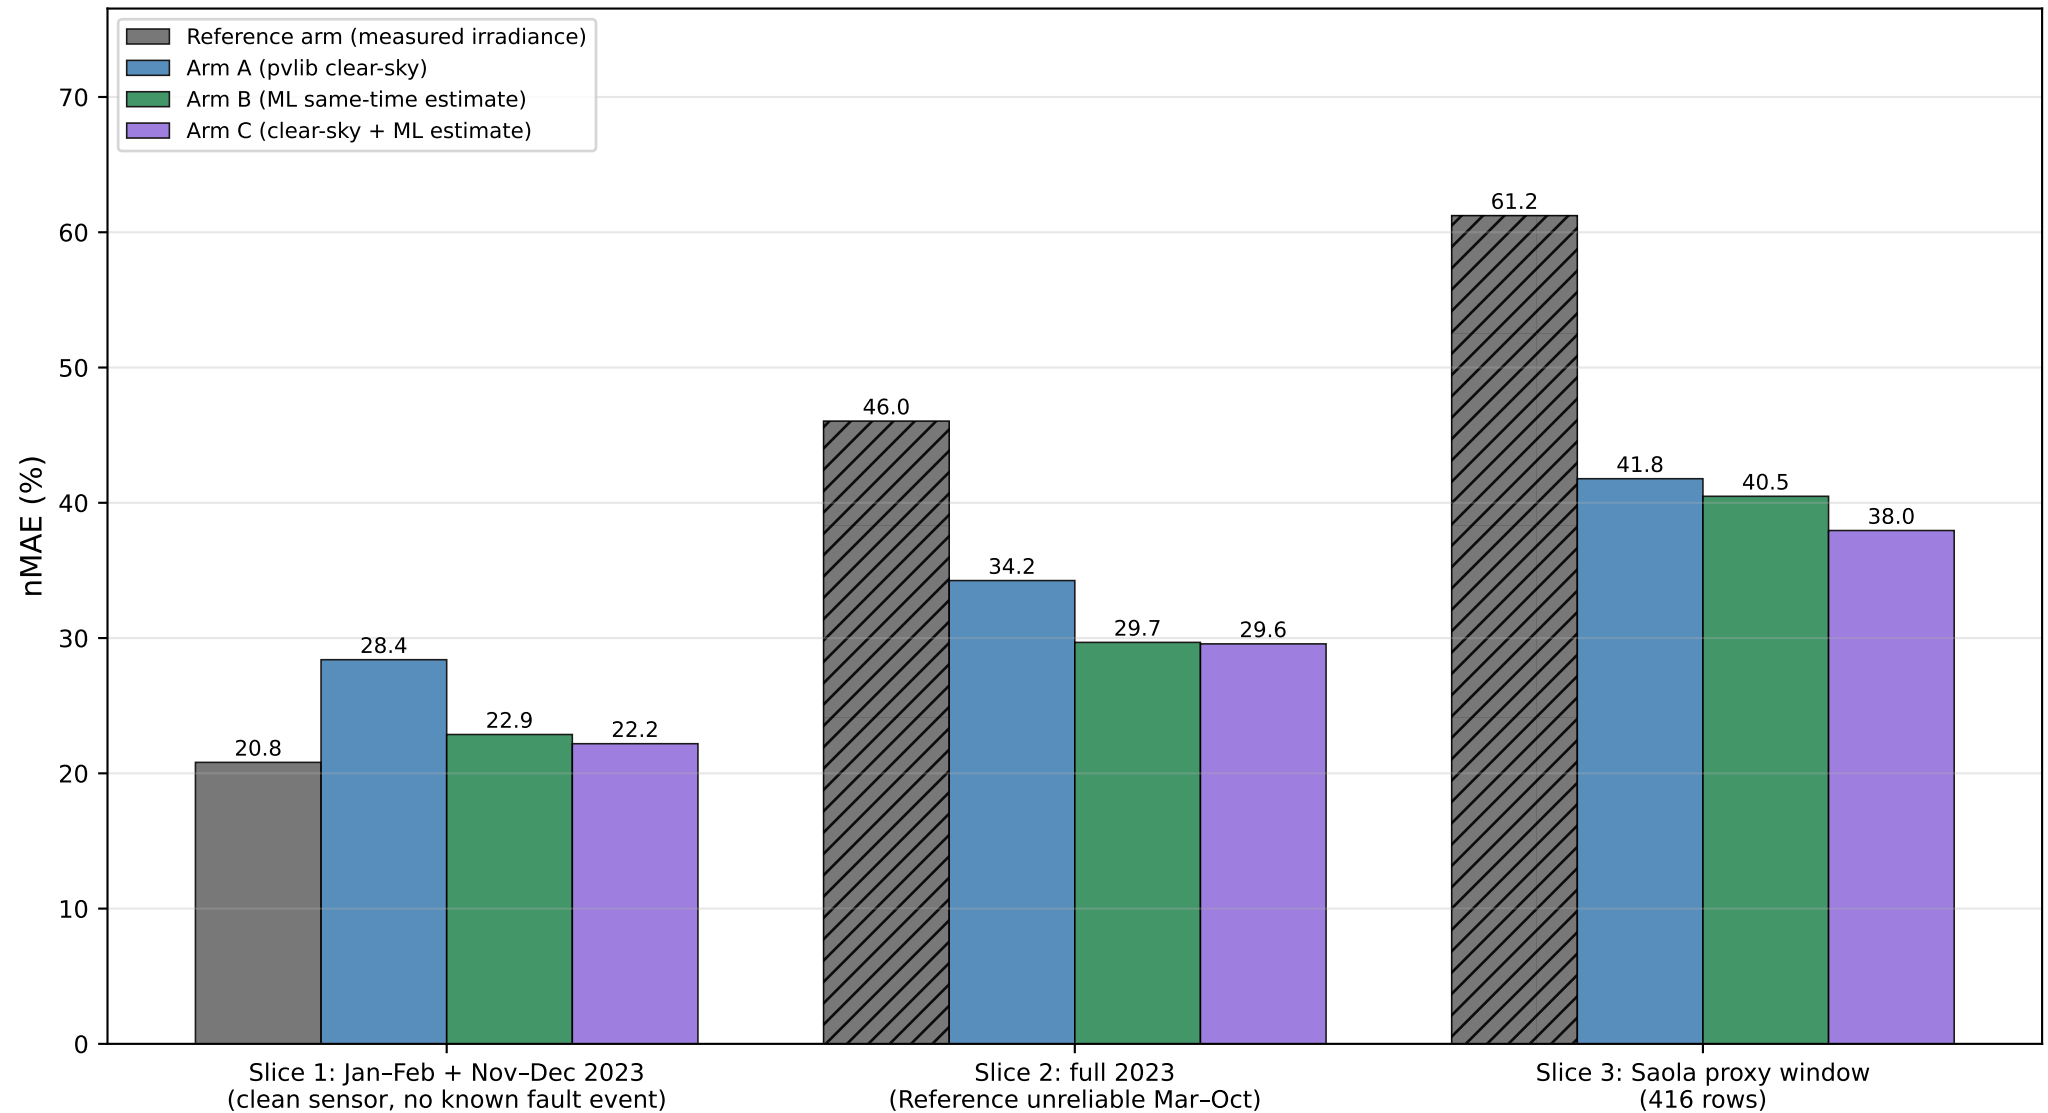

1. On the fair slice the ML same-time estimate (22.9%) substantially outperforms pvlib clear-sky alone (28.4%) and sits 1.9 points behind a working sensor (20.8%).
2. On full 2023 the Reference arm is the weakest arm (46.0%) because its sensor was corrupted: in this dataset and affected period, the degraded measured-irradiance arm performed worse than all three no-sensor arms.
3. Arm C $\approx$ Arm B throughout: combining clear-sky with the ML estimate provides negligible additional benefit in the primary comparison (Slice 1 22.9 $\rightarrow$ 22.2%; Slice 2 29.7 $\rightarrow$ 29.6%).

Hatched: Reference arm's irradiance sensor was corrupted (Mar-Oct 2023) or absent during these periods.