



Objective 3 — Brazil / Hong Kong distribution overlap for the shared quantities


Capacity-normalised power
(Brazil DC / 5.00 kW vs HK AC / 27.6 kW)

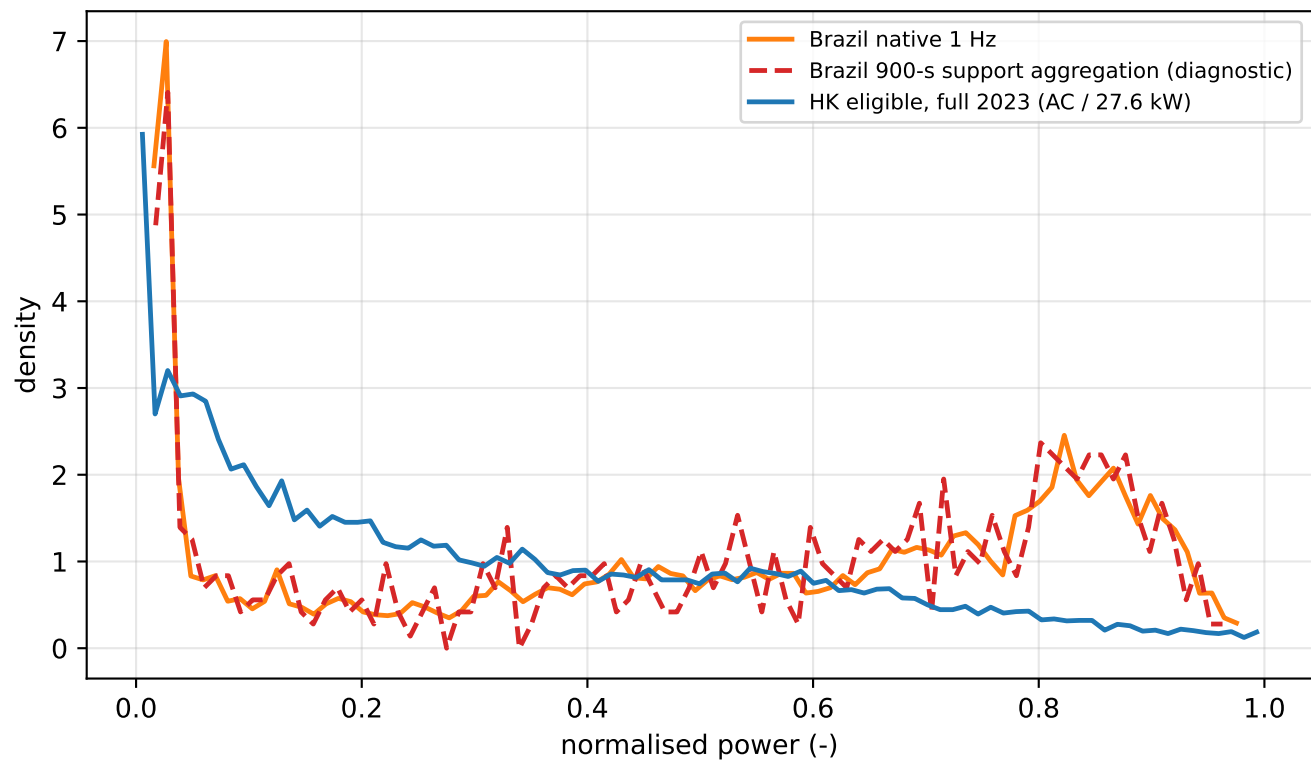


Irradiance — GATE population
(HK clean-sensor months only)

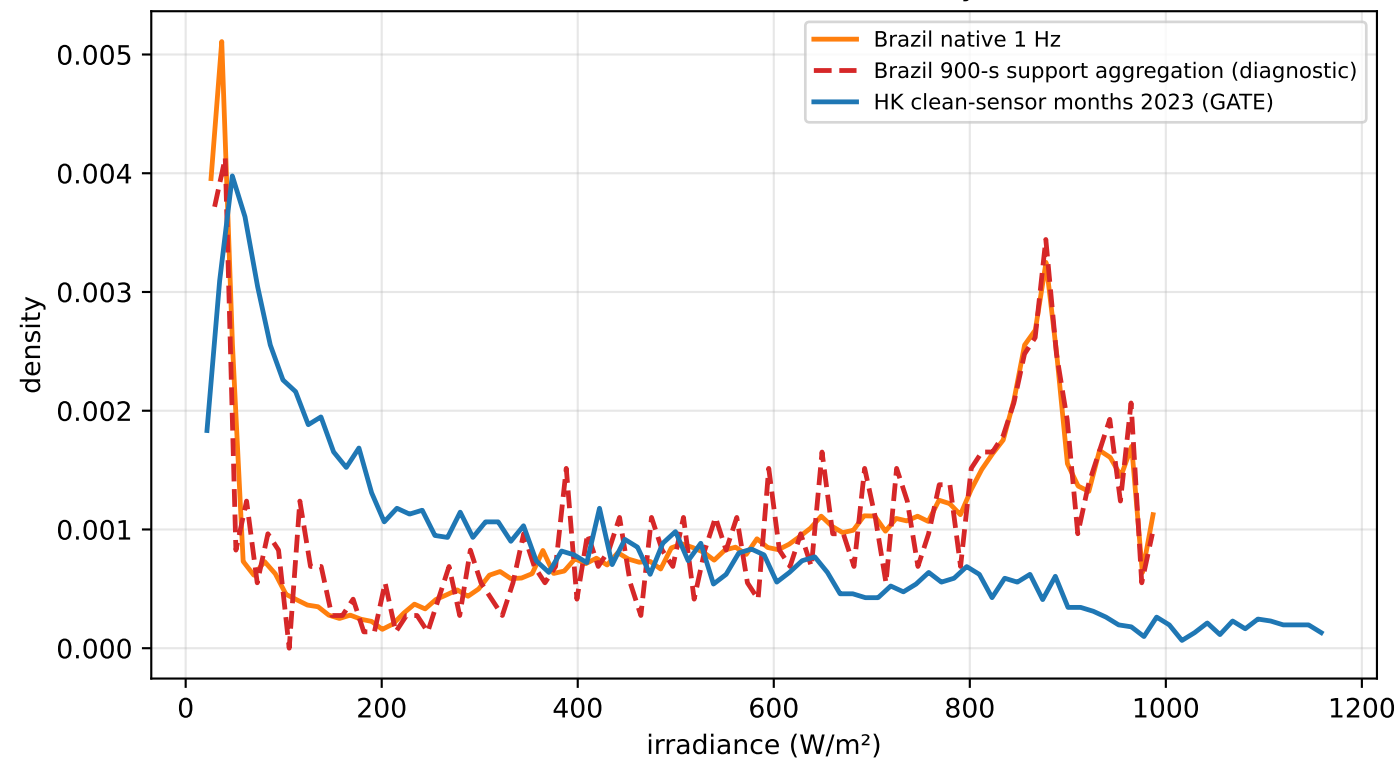

Irradiance — full 2023, KNOWN SENSOR CORRUPTION
EXCLUDED from the transfer-feasibility gate

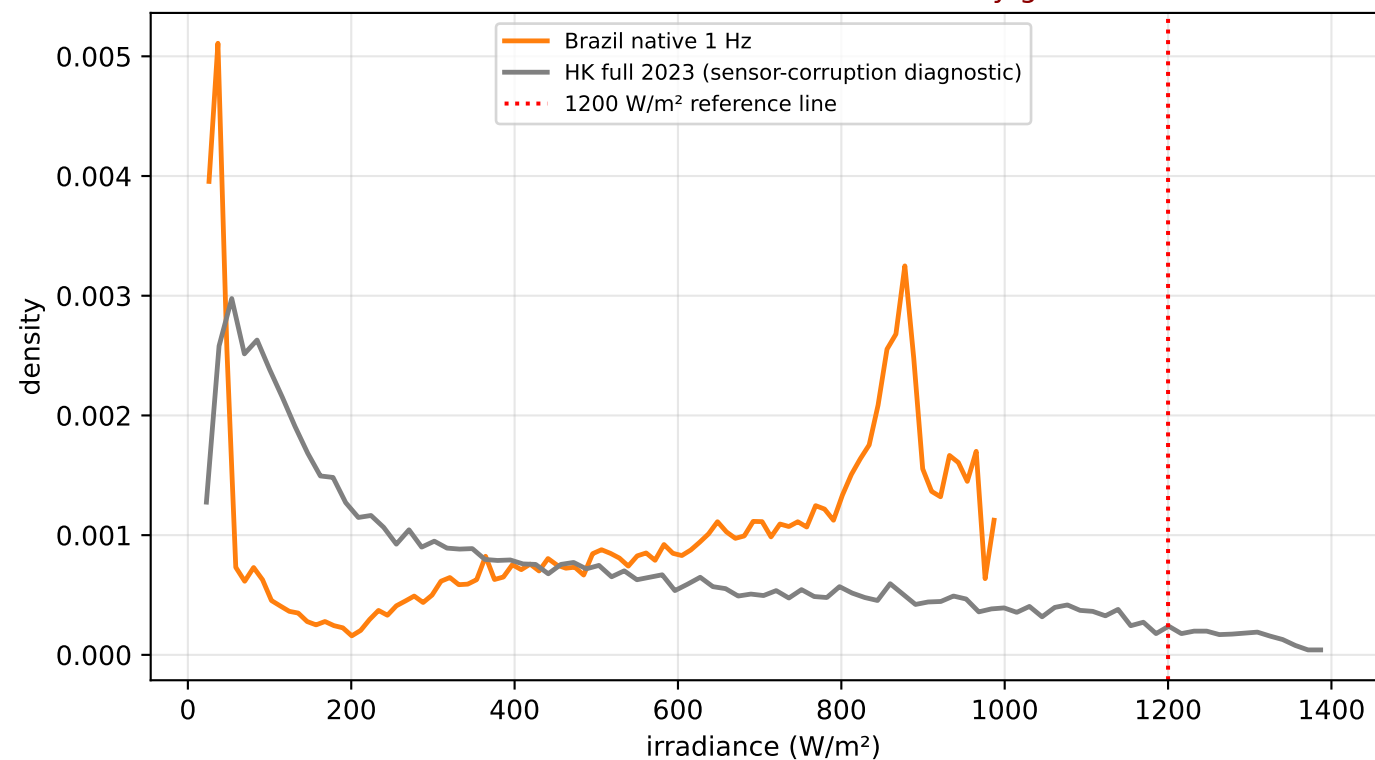

Normalised power — empirical CDF
(support overlap)

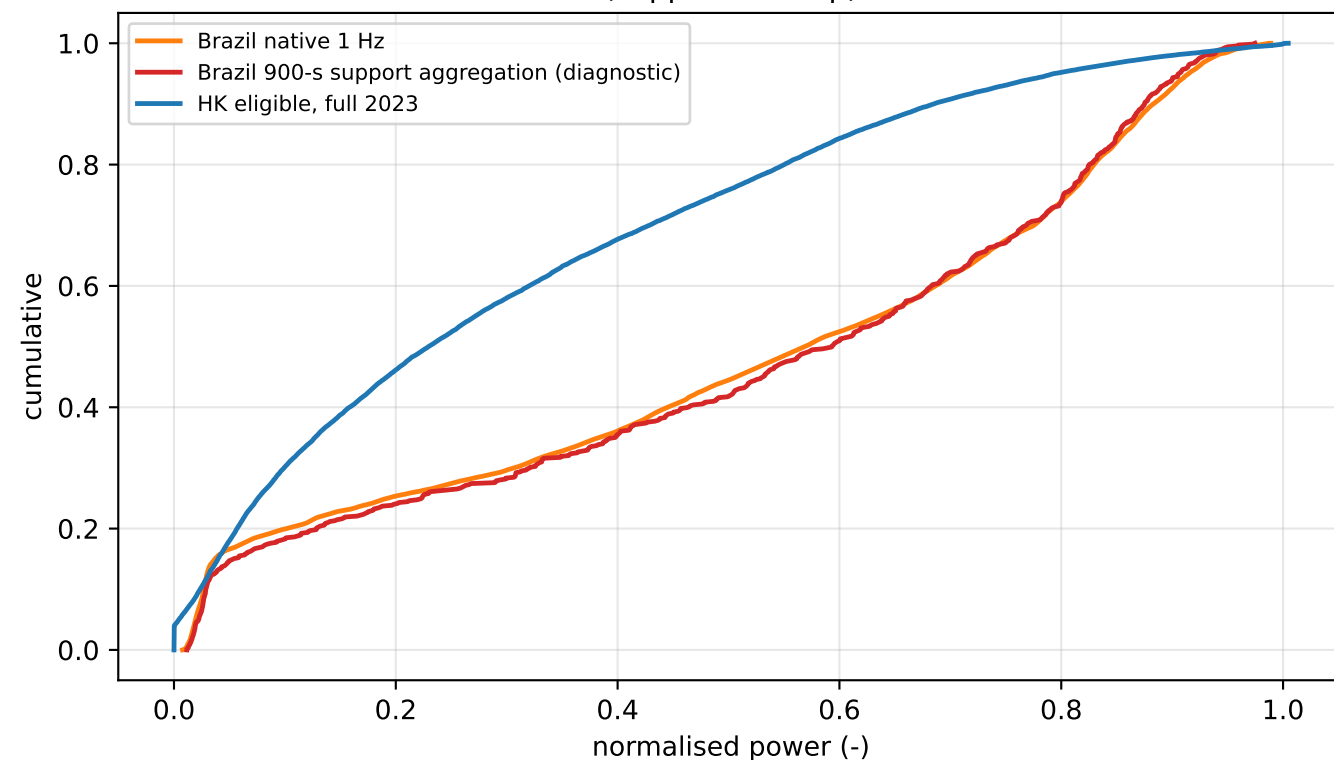

Brazil is shown in two representations: native 1 Hz and a 900-second support aggregation (diagnostic only, never used for training, mixed-label blocks unlabelled). Matching temporal support changes the KS statistic for normalised power from 0.320 to 0.341 (HK eligible full 2023) and for irradiance from 0.340 to 0.348 (HK clean-sensor months); this measures how sensitive the discrepancy is to temporal support, NOT a causal apportionment of domain mismatch. The full-2023 HK irradiance panel is a known sensor-corruption diagnostic and is excluded from the gate.