
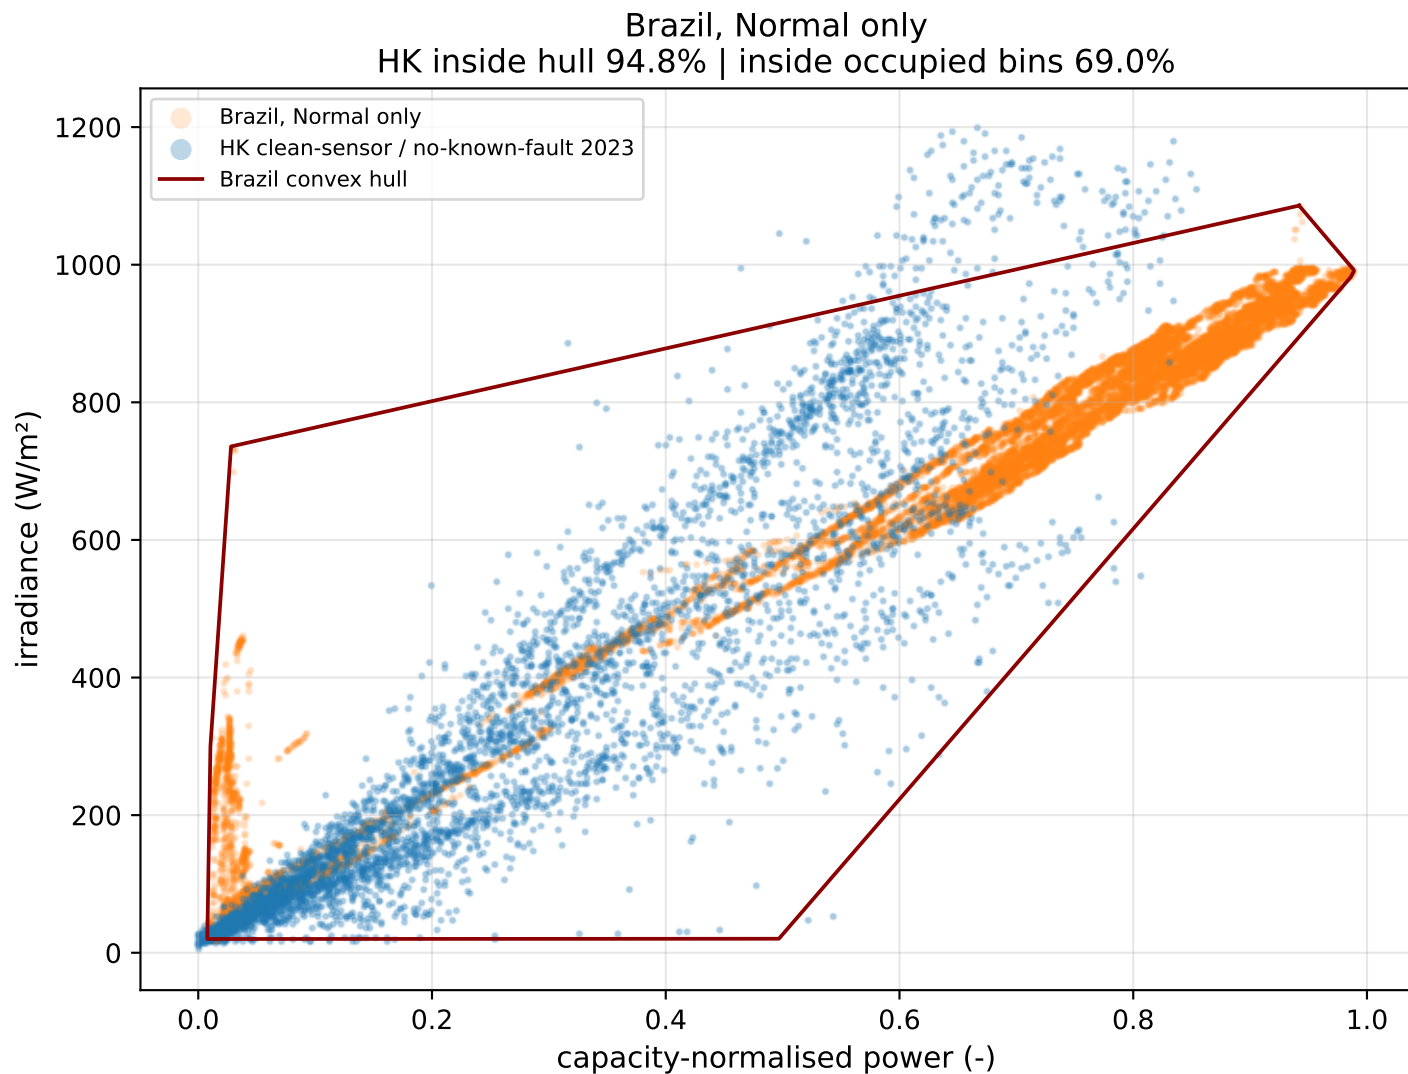


Objective 3 — joint two-feature support, Brazil ($\div 5.00$ kW) vs HK clean-sensor months

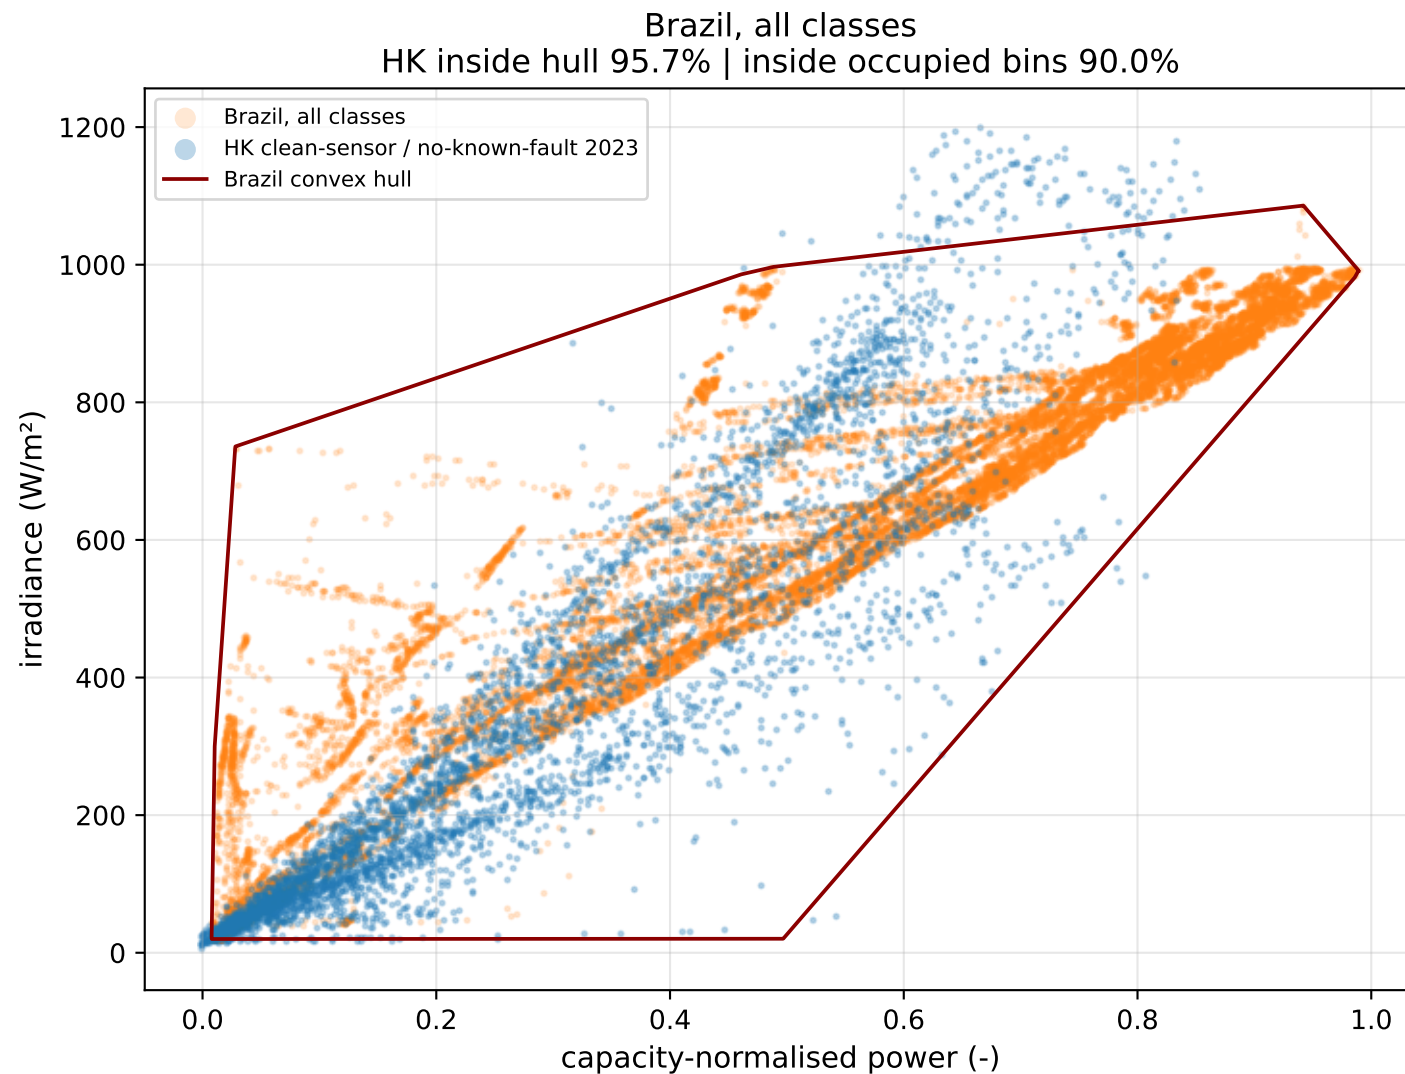

Descriptive support analysis only — no fitted domain classifier. Convex-hull containment is permissive and can bridge empty interior regions; occupied-bin containment (20×20 common grid) is more sensitive to actual joint source occupancy. Neither defines a pass/fail threshold.