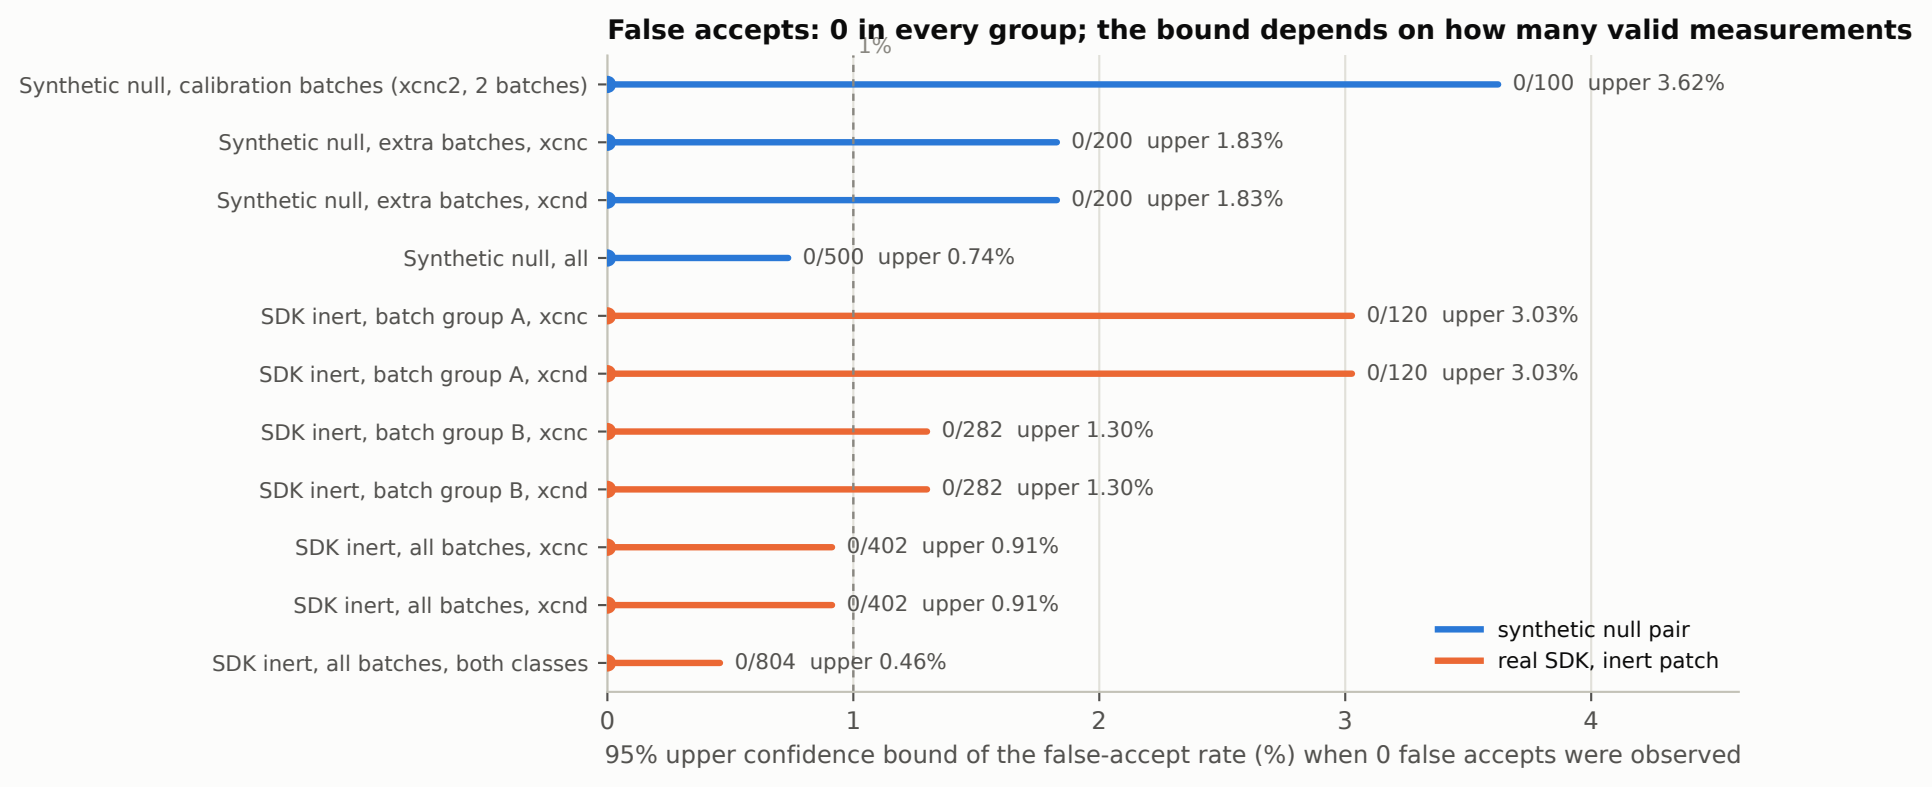
False accepts: 0 in every group; the bound depends on how many valid measurements
1%
Synthetic null, calibration batches (xcnc2, 2 batches)
0/100 upper 3.62%
Synthetic null, extra batches, xcnc
0/200 upper 1.83%
Synthetic null, extra batches, xcnd
0/200 upper 1.83%
Synthetic null, all
0/500 upper 0.74%
SDK inert, batch group A, xcnc
0/120 upper 3.03%
SDK inert, batch group A, xcnd
0/120 upper 3.03%
SDK inert, batch group B, xcnc
0/282 upper 1.30%
SDK inert, batch group B, xcnd
0/282 upper 1.30%
SDK inert, all batches, xcnc
0/402 upper 0.91%
SDK inert, all batches, xcnd
0/402 upper 0.91%
SDK inert, all batches, both classes
0/804 upper 0.46%
synthetic null pair
real SDK, inert patch
0
1
2
3
4
95% upper confidence bound of the false-accept rate (%) when 0 false accepts were observed