

PRAXIS DER SOFTWARENTWICKLUNG

SPECIFICATIONSBOOK

NEURAL NETWORK BASED IMAGE CLASSIFICATION SYSTEM ON HETEROGENEOUS PLATFORMS

from

Team 2

Dimitrov, Drehwald, Guneshka, Häring, Stangel

Contents

1	Introduction	3
2	Goal	3
3	Product use	3
4	Criteria	4
4.1	Must Acceptance criteria	4
4.2	Can Acceptance criteria	5
4.3	Criteria of demarcation	7
5	Product environment	8
6	Product data	8
7	Functional requirements	10
7.1	Image classification	10
7.2	Operating modes	11
7.3	Platforms	12
7.4	GUI	13
7.5	Training	17
7.6	Object detection	17
7.7	Video handling	18
8	Non-functional requirements	18
9	Test cases	19
10	System models	28
10.1	Scenarios	28
10.2	Usecases	31
10.3	GUI	35
11	Stage responsibilities	38
12	Quality requirements	38

1 Introduction

In today's world of globalisation and digitalisation, to keep up with the rapidly growing economy, one important challenge is the automatization of tasks. One aspect of this is the classification of visual inputs. Whether it is to check for broken parts in production or surveillance of public places. With the quickly increasing power of computers, neural networks are becoming more popular for tasks like this, as they need a lot of computational power but deliver sufficiently accurate results.

In the following project we want to build a framework with an intuitive graphical user interface to achieve these kinds of tasks.

To speed up the process of classification the software will be able to use different hardware that is more efficient for specific calculations. To further adjust the neural network to its task it should have different operating modes to function on. High performance, low power consumption and a high energy efficiency mode.

2 Goal

The goal of this project is to create a software which performs sufficiently accurate image classification and is able to switch between deployment platforms and operating modes. The software will be able to predict the power consumption and the performance (bandwidth, FLOPs).

The software should also have a GUI to interact with the program and to visualise the results.

The software should be extendable for further tasks.

3 Product use

The target group are engineers with a basic knowledge of data science.

The software is used to classify images on different deployment platforms with different operating modes using a pretrained neural network.

Additionally, the software can be extended to be used for image detection, classification of frames from a videostream and training of a neural network.

4 Criteria

4.1 Must Acceptance criteria

- | | |
|---------------|--|
| MAC010 | Image classification
The software can take multiple images as input and returns the possibilities for each predefined image class for each image. The prediction is based on a pretrained neural network. |
| MAC020 | Running neural network on heterogeneous platforms
The software is able to communicate with CPU and FPGA. The software is able to offload calculations to the different deployment platforms and receive the results. |
| MAC030 | Different operating modes
The software has three operating modes. One mode for high performance, one for low power consumption and one for high energy efficiency. |
| MAC040 | Performance and power consumption prediction
The software can predict the performance with a certain power consumption and also the power consumption for a certain performance. |
| MAC050 | GUI for interacting with software
The user is able to access the entire functionality described in MAC010-MAC040 just by using the GUI. No coding or command line usage is required. |

4.2 Can Acceptance criteria

CAC070	Illustration of the topology of a neural network The software is able to visualise the topology of a given neural network (see figure 9).
CAC071	The visualisation of the neural network can be saved The visualized neural network is saved as a .png file in a chosen directory.
CAC080	Object Detection The software can detect the bounding box of an object.
CAC090	Using different models The user is able to choose different pretrained neural networks to use, before an image classification process.
CAC100	Training neural networks The software allows the user to train a neural network based on an predefined topology. Neural networks trained by the user will be executed the same way neural networks provided with the software are executed.
CAC110	Voting of multiple neural networks The user is able to choose multiple neural networks for classification. The software will then execute all selected neural networks sequentially. The result presented to the user will be based on the weighted results of the different neural networks.
CAC120	Using video for classification The software is able to take a video, divide it into a certain amount of frames and perform image classification for each frame. The classified frames with their results are shown and can be iterated by the user.
CAC130	Using camera for classification as input The software takes the current frame from the camera connected to the host pc, classifies it, displays the results and then when ready, takes the next available frame and processes it.
CAC140	Running neural network on GPU MAC020 is extended by GPU.

- CAC150 Input mode selection**
The software allows the user to select his preferred image input method using a dropdown menu.
The dropdown menu entries are: "Image(s)", "Camera", ".txt file with image paths".
- CAC160 Output parameter "save all results"**
The software allows the user to select if the classification/detection output of each processed image should automatically be saved or not.
- CAC170 Output parameter "show all results "**
The software allows the user to select if the software should wait for a user input after each image.
If selected, the classification/ detection output for an image will be shown and the user has to click a button to continue with the next image.
If not choosen, all selected images should be processed in the background and detached from the gui.

4.3 Criteria of demarcation

- D010 No low-level optimization**
Optimisations to reduce the execution time of object classification and detection will be carried out in OpenCL.
No optimizations including low-level languages or assembly intrinsics will be implemented.
- D020 No real time requirements**
The software doesn't have to react in realtime.
Code optimizations will be done in OpenCL to reduce the running time of the network per image classification/ detection task.
- D030 No neural network size optimization**
No techniques for memory usage reduction like pruning or binarisation will be implemented.
- D040 No mobile support**
The software does not support mobile devices, like smartphones or wearables.
- D050 No input from commandline**
The software does not support commandline input. The features are only useable with the GUI.

5 Product environment

The software runs on a computer in the lab at the CDNC institute. It has a CPU and an external FPGA connected via USB. Additionally, there is a GPU. The operating system is XUbuntu 18.04.

6 Product data

- PD010 Images for classification**
The user can choose images of the format .jpg, .png, .bmp. The images are chosen by the user with the file explorer.
- PD020 Config/weight file of pretrained model**
The config file is a .cfg file with four sections, separated by *<section>*:
In the first, the class names are given, one per line.
In the second, hyperparameters are described as *<name> = <value>*.
In the third, layers are described in their order with the following format *[kind of layer]*, each followed by a list of layer-parameters in the format *<name> = <value>*
In the last section the weights and biases for each layer are listed.
- PD030 Labeled image set for classification training**
The dataset is chosen by the user. The dataset is a directory with images and each image name has the format *<id of image>_<image class>*.
- PD040 Labeled set of images for object detection training**
It is a .txt file in the same directory as the images. The images are labeled with their name. The bounding box for each image are described in the .txt file with the same name as the image, in the format *image class, x, y, width, height*. (X,Y) are the coordinates of the left bottom corner. (X, Y), width and height are relative.

- PD050 Output format of image classification results if saved**
If the output result of the classification is saved, the results are saved as a .txt file with the name format *<image name>_<neural network name>_<number>*. The format is *<image class name> = <probability>*, one row for each image class.
If multiple images are classified, there are multiple .txt files.
- PD060 Output format of image detection results if saved**
If the output result of the detection is saved this is saved as a .txt file with the name format *<image name>_<neural network name>_<number>*. The format is *<image class name> = <probability>, <X>, <Y>, <width>, <height>*, one row for each image class.
If multiple images are detected, there is one .txt file for each input image.
- PD070 Video input**
The input video is in a .avi format.

7 Functional requirements

7.1 Image classification

7.1.1 Must

- MFR010 Use neural network for image classification**
Tested with: T010 Implements: MAC010
A neural network is used to classify images. The result is a list of probabilities per image class.
- MFR011 Deploy pre-trained neural network with the corresponding layers**
Tested with: T011 Implements: MAC010
A pre-trained neural network is deployed with its layers to a specified platform. The deployed neural network is used for MFR010.
- MFR012 Reading and parsing a neural network configuration file**
Tested with: T012 Implements: MAC010
The software is able to read a configuration file of a neural network and parse for MFR011.
- MFR013 Layerimplementation**
Tested with: T010 Implements: MAC010
The software implements neural network layers needed for deploying convolutional networks. Those are layers such as convolutional, dropout, fully-connected, depth-concat layer.

7.1.2 Can

- CFR020 Voting of multiple neural networks**
Tested with: T170 Implements: CAC110
The user can choose multiple neural networks. The image classification is done on every neural network separately and the results are weighted and accumulated. The accumulated result is shown.

7.2 Operating modes

7.2.1 Must

- MFR030 High performance operating mode**
Tested with: T020 Implements: MAC030
An operating mode to perform calculations as fast as possible.
- MFR031 Low power consumption operating mode**
Tested with: T021 Implements: MAC030
An operating mode to perform calculations with low power consumption.
- MFR032 Have high energy efficiency operating mode**
Tested with: T022 Implements: MAC030
An operating mode to perform calculations at an optimal ratio between performance and power consumption.
- MFR033 Calculator for power consumption**
Tested with: T023 Implements: MAC040
The software can calculate the power consumption on a given neural network and deployment platform.
- MFR034 Calculator for performance**
Tested with: T024 Implements: MAC040
The software can calculate the performance on a given neural network and deployment platform.
- MFR035 Dispatching the calculation process defined from the operating mode**
Tested with: T020, T021, T021 Implements: MAC030
The software is able to distribute the calculations to the deployment platforms regarding the operating mode.

7.3 Platforms

7.3.1 Must

- MFR040 Support CPU for calculation**
Tested with: T030 Implements: MAC020
The software supports CPU for calculation.
- MFR041 Support FPGA for calculation**
Tested with: T031 Implements: MAC020
The software supports FPGA for calculation.
- MFR050 Send image for classification**
Tested with: T040 Implements: MAC020
The software gives the image as input for the neural network to the chosen deployment platform.
- MFR051 Receive result**
Tested with: T041 Implements: MAC020
The program should be able to receive results of the executed image classification from the deployment platforms.
The software gives the image as input for the nn to the chosen deployment platform.

7.3.2 Can

- CFR060 Support GPU for calculation**
Tested with: T160 Implements: CAC140
To speed up the calculations the program is able to use an additional GPU.

7.4 GUI

7.4.1 Must

MFR070 GUI

Tested with: T050 Implements: MAC050

The program has a Graphical User Interface to display all functions to the user.

MFR080 Showing results

Tested with: T060 Implements: MAC050

After executing the image classification, the results are shown in a bar chart. If the user classified multiple images there is the option to skip through the results.

MFR090 Choosing image for classification

Tested with: T070, T210 Implements: MAC050

The GUI has a button with an on click event which opens a file explorer. The explorer filters the files that only files of the format .jpg, .png, .bmp are listed. The user can choose multiple images.

MFR100 Choosing deployment platform

Tested with: T080 Implements: MAC050

The GUI has checkboxes for choosing which deployment platforms are regarded. There are checkboxes for the devices which are supported. The devices which are theoretically supported but are not connected to the host pc or the communication with them does not work are grayed out and not clickable.

MFR110 Choosing operating mode

Tested with: T090 Implements: MAC050

The GUI has a dropdown which lists the different modes (high performance mode, low power consumption mode and high energy efficiency mode). The power consumption in Watts and performance in FLOPs are also stated behind the operating mode names.

7.4.2 Can

- CFR120 Choosing between different neural networks**
Tested with: T100 Implements: CAC090
The GUI has a button which opens the file explorer which filters for .cfg files. There you choose the config file of the neural network which you want to use. The program loads this config and parses it so it can be deployed. Possible models would be GoogLeNet or AlexNet. If multiple neural networks are chosen the software uses the voting mode.
- CFR130 Choosing and loading data set**
Tested with: T112 Implements: CAC100
The software has an option to select a set of labeled images and for loading those.
- CFR131 Change the learning rate**
Tested with: T114 Implements: CAC100
To adjust the learning process of the neural network the user can change the speed of how fast the weights and biases will be changed with a textbox. Valid values are floating point numbers between 0 and 1.
- CFR132 Change desired prediction**
Tested with: T114 Implements: CAC100
To adjust the precision of a newly trained neural network the user can enter the desired precision of the neural network. If the neural network achieves the desired precision on the test set it stops and displays a message to the user. Valid values are floating point numbers between 0 and 1.
- CFR133 Choose output name**
Tested with: T111 Implements: CAC100
The user can choose with a textbox the name of the newly trained neural network.
- CFR140 Visualisation of neural network**
Tested with: T120 Implements: CAC070
The software is able to visualise the topology of a neural networks (see figure 9)
- CFR141 Saving the visualisation**
Tested with: T121 Implements: CAC071
The user can save the visualisation of the topology of a neural network as .png file to a chosen directory.
- CFR150 Showing detected object**
Tested with: T131 Implements: CAC080
The found objects are marked by a bounding box. The bounding box is drawn on the image. This picture is shown.

- CFR160 Choosing and loading video**
Tested with: T140 Implements: CAC120 CAC120
The user can choose a video and the software can use it as input for the classification/detection process.
- CFR170 Input selection**
Tested with: T180 Implements: CAC160
A dropdown menu is part of the classification and detection page. It contains the four options: Single Images, Image folder, Camera, .txt File with Img Paths
Single image is MFR070
Image folder opens the file explorer with the filter for directories. Images with a valid format are loaded from this directory.
.txt File with image paths opens the file explorer with filter for .txt files.
Camera opens a connection to a connected camera and receives the video stream.
- CFR180 Output parameter “save all results“**
Tested with: T190 Implements: CAC160
A checkbox is part of the classification and detection page.
If selected, for each image which has been selected by the user, the classification/ detection output will be stored as described in PD050 and PD060. Each output file is saved in the same folder as the input file.
If a camera is chosen as input, the output will be stored in a “camera“folder
- CFR181 Output parameter “show all images“**
Tested with: T200 Implements: CAC170
If selected, the results can be skipped through. One image with its result is shown at a time.
If not selected, all images chosen by the user will be processed continuously without showing classification/ detection output in the GUI.

7.5 Training

7.5.1 Can

CFR190 Train neural network for classification of imageset

Tested with: T110 Implements: CAC100

The user chooses a neural network and a new imageset and trains the neural network on this new imageset. If it is pretrained it uses transfer learning with the existing weights otherwise random values.

CFR191 Saving newly trained neural network

Tested with: T111 Implements: CAC100

The software is able to take the weights and config of an newly trained neural networks and save it as .cfg file in the same directory as the chosen neural network.

CFR192 Backpropagation

Tested with: T113 Implements: CAC100

The software is able to adjust the weights and biases of the neural network in the training process with backpropagation.

CFR193 Fit the output layer to the amount of image classes

Tested with: T115 Implements: CAC100

If the user trains a neural network with a dataset, the number of output nodes are adapted to the number of image classes.

7.6 Object detection

7.6.1 Can

CFR200 Object detection

Tested with: T130 Implements: CAC080

The software can detect the position and image class of objects in an image.

7.7 Video handling

7.7.1 Can

- CFR210 Connect with camera**
Tested with: T150 Implements: CAC130
The software can connect with a camera connected to the host pc.
- CFR211 Receive video stream from camera**
Tested with: T151 Implements: CAC130
The software can receive a video stream from the camera.
- CFR212 Apply classification/detection for a certain amount of frames**
Tested with: T152 Implements: CAC130
The software can divide a video or video stream into frames and is able to apply image classification and detection on those.
- CFR213 Saving the frames**
Tested with: T152 Implements: CAC120
The software divides the video into frames which are saved to the file system.

8 Non-functional requirements

- NFR010 Project size**
The project should have around ten thousand (10,000) lines of code
- NFR020 Code size**
The project should be done with Object-Orientated programming.
The whole project should have around forty (40) to eighty (80) classes excluding interfaces.
- NFR030 Model-View-Controller**
The project should be based on the design pattern model-view-controller.
- NFR040 Programming language**
The software is written in C++ and OpenCL.
- NFR050 Minimal size of training dataset**
The software works with a dataset with a minimum of 100 images.

9 Test cases

T010	Use a neural network for image classification
T010.1	State: An image of an elephant as input, a pretrained neural network, a deployment platform and an operating mode is given. Action: The user clicks on “Start image classification”. Result: The image is classified as elephant by the neural network and the results are shown.
T011	Deploy pre-trained neural network
T011.1	State: The pretrained neural network is loaded and parsed. Action: The user clicks on “Start image classification”. Result: The software loads the model to the deployment platform.
T012	Reading and parsing neural network configuration file
T012.1	State: A .cfg file with the configuration of a pretrained neural network is given. Action: The user clicks on “Start image classification”. Result: The software loads the model and parses it .
T012.2	State: The file explorer is open Action: The user selects a neural network to import Result: The file explorer closes and the neural network is imported and selected for the classification.
T020	High performance operating mode
T020.1	State: An image of an elephant as input, a pretrained neural network, a deployment platform is given . Action: The user chooses to perform the calculations in high performance operating mode and starts the classification. Result: The calculations run considerably faster than in the other possible modes with the same conditions.
T021	Low power consumption operating mode
T021.1	State: An image of an elephant as input, a pretrained neural network, a deployment platform is given. Action: The user chooses to perform the calculations in low power consumption operating mode and starts the classification. Result: The calculations run with considerably lower power consumption than with the other possible modes in the same conditions.

T022	High energy efficiency operating mode
T022.1	<p>State: An image as input of an elephant, a pretrained neural network, a deployment platform is given.</p> <p>Action: The user chooses to perform the calculations in high energy efficiency operating mode and starts the classification.</p> <p>Result: The calculations run with regard to balance between power consumption and performance.</p>
T023	Calculator for power consumption
T022.1	<p>State: A pretrained neural network, a deployment platform and the operating mode is given.</p> <p>Action: The user chooses another operating mode.</p> <p>Result: The new power consumption is calculated automatically and then shown.</p>
T024	Calculator for performance
T022.1	<p>State: A pretrained neural network, a deployment platform and the operating mode is given.</p> <p>Action: The user chooses another operating mode.</p> <p>Result: The new performance is calculated automatically and then shown.</p>
T030	Support CPU for calculation
T030.1	<p>State: An image of an elephant as input, a pretrained neural network, CPU as deployment platform and an operating mode is given.</p> <p>Action: Click on the button “Start image classification“</p> <p>Result: The image class elephant has the highest probability.</p>
T031	Support FPGA for calculation
T031.1	<p>State: An image of an elephant as input, a pretrained neural network, FPGA as deployment platform and an operating mode is given.</p> <p>Action: Click on the button “Start image classification“</p> <p>Result: The image class elephant has the highest probability.</p>
T040	Send image for classification
T040.1	<p>State: An image of an elephant as input, a pretrained neural network, a deployment platform and an operating mode is given.</p> <p>Action: The user starts image classification</p> <p>Result: The software sends the image as array to the selected platform.</p>

T041	Receive result
T041.1	<p>State: The software is awaiting result.</p> <p>Action: Platform sends results.</p> <p>Result: The software receives the results from the platform and shows it.</p>
T050	GUI
T050.1	<p>State: The user wants to use the software.</p> <p>Action: The user starts the program.</p> <p>Result: The users sees the Graphical User Interface showed on Figure 1.</p>
T060	Showing results
T060.1	<p>State: The software awaits result.</p> <p>Action: The deployment platform sends result.</p> <p>Result: The Graphical User Interface shows the result in a bar chart as shown in figure 4.</p>
T070	Choosing image for classification
T070.1	<p>State: The user is on the page for image classification.</p> <p>Action: The user clicks on the button “Choose image”.</p> <p>Result: The file explorer opens with the filter for .png, .jpg, .bmp.</p>
T070.2	<p>State: The file explorer is open.</p> <p>Action: The user selects an image with a valid format.</p> <p>Result: The file explorer closes and image is loaded and shown as preview.</p>
T080	Choosing platform/hardware
T080.1	<p>State: The user is on the page for image classification.</p> <p>Action: The user chooses the desired deployment platform with the dropdown.</p> <p>Result: An internal flag is set to the desired platform and the dropdown shows the chosen deployment platform.</p>
T090	Choosing operating mode
T090.1	<p>State: The user is on the page for image classification.</p> <p>Action: The user chooses the desired operating mode with the dropdown.</p> <p>Result: An internal flag is set to the desired operating mode and the dropdown shows the chosen operating mode</p>

T100	Choosing between different neural network
T100.1	<p>State: The user is on the page for image classification.</p> <p>Action: The user clicks on the button “Choose neural network”.</p> <p>Result: The file explorer opens.</p>
T100.2	<p>State: The file explorer is open.</p> <p>Action: The user selects a config file.</p> <p>Result: The file explorer closes and the software loads the input and parses it. If it is loaded there is a success message shown.</p>
T110	Train neural network for classification of imageset
T110.1	<p>State: The user is on the main page.</p> <p>Action: The user clicks the button “Train a neural network”.</p> <p>Result: The user is redirected to a new page for training, shown in figure 6.</p>
T110.2	<p>State: The user is on the page for training, has selected a neural network, a dataset for training, the kind of training (backpropagation or transfer learning if possible), the learning rate and the desired precision.</p> <p>Action: The user clicks on the button “Train”</p> <p>Result: The software starts to train the selected neural network and shows the progress in a line graph.</p>
T110.3	<p>State: The training is in process.</p> <p>Action: The precision reaches the desired precision.</p> <p>Result: The training stops.</p>
T111	Saving a neural network after training
T111.1	<p>State: The training finishes.</p> <p>Action: No action required.</p> <p>Result: The software stores the trained neural network in the directory of the selected .cfg file as a .cfg file.</p>
T112	Choosing and reading dataset
112.1	<p>State: The user is on the training page.</p> <p>Action: The user clicks on “Choose dataset”.</p> <p>Result: A file explorer opens.</p>
T112.2	<p>State: The file explorer is open.</p> <p>Action: The user chooses the folder with the images.</p> <p>Result: The program automatically iterates over all images and reads the given data that can be used for training.</p>

T113	Backpropagation
T113.1	<p>State: The user is on the training page, a dataset, a neural network, learning rate and desired precision are given.</p> <p>Action: The user clicks on “Train“.</p> <p>Result: The software adjusts the weights and biases of the corresponding neural network via backpropagation to improve its precision. These changes are then shown with a diagram.</p>
T114	Changing parameters
T114.1	<p>State: The user chose a neural network, the dataset and the desired precision.</p> <p>Action: The user changes the learning rate to a smaller number and starts training.</p> <p>Result: The neural network adjusts its weights but with smaller significance of one image.</p>
T115	Fit the output layer to the amount of image classes
T115.1	<p>State: The user chose a neural network with ten output nodes and a dataset with 12 image classes.</p> <p>Action: The user starts the training</p> <p>Result: The output layer is extended by two nodes as well as weights for the new connections are initialised.</p>
T120	Showing topology of a neural network
T120.1	<p>State: The user is on the main page.</p> <p>Action: The user clicks the “Show topology of a neural network“button.</p> <p>Result: The user is redirected to a new page for showing a topology.</p>
T120.2	<p>State: The user is on the page for showing the topology.</p> <p>Action: The user clicks on “Choose topology to show“</p> <p>Result: The file explore opens</p>
T120.3	<p>State: The file explorer is open.</p> <p>Action: The user choses a .cfg file.</p> <p>Result: The file explorer closes and the topology is shown as in figure 9.</p>
T121	Saving topology visualisation
T121.1	<p>State: The user is on the show topology page and a topology is shown.</p> <p>Action: The user clicks on the save button.</p> <p>Result: The visualisation is saved to the file system.</p>

T130	Object detection
T130.1	<p>State: The detection window is open. An image as input, a pre-trained neural network, a deployment platform and an operating mode is given.</p> <p>Action: The user clicks on the button “Start detection“</p> <p>Result: The network is run for inferencing and the network output is shown to the user.</p>
T131	Drawing bounding box
T131.1	<p>State: Inferencing was executed on an image given by the user, the choosen neural network predicted bounding boxes.</p> <p>Action: No action required</p> <p>Result: The original image, given by the user, is overlayed with the boxes predicted by the network, the updated image is presented to the user.</p>
T140	Choosing video
T140.1	<p>State: The software is running. A pretrained neural network, a deployment platform and an operating mode is given.</p> <p>Action: The user selects a .avi video file.</p> <p>Result: The system stores the path to the selected video and is available to process images from this video sequentially.</p>
T150	Connect with camera
T150.1	<p>State: The software is running.</p> <p>Action: The user connects a usb camera to the host.</p> <p>Result: The system dynamically detects the camera and allows the user to select the camera as an image source</p>
T150.2	<p>State: A usb camera is connected to the host. The software is not running.</p> <p>Action: The user starts the software.</p> <p>Result: The system dynamically detects the camera and allows the user to select the camera as an image source</p>
T151	Receive video stream from camera
T151.1	<p>State: The software is running, a camera is available as image source.</p> <p>Action: The user chooses the camera as image source.</p> <p>Result: The first camera image is provided as a preview, the continuous image stream is available for further processing.</p>

T152 T152.1	Apply classification for a certain amount of frames State: The software is running. A video source was chosen by the user. All network details were provided by the user. Classification was chosen by the user. Action: The user clicks on the button “start classification” Result: The software divides the video into frames and saves them. The software sequentially classifies the pictures and outputs the result as set.
T160 T160.1	Support GPU for classification State: The classification window is open. An image as input, a pretrained neural network, a deployment platform and an operating mode is given. Action: The user chooses GPU as a deployment platform. The user clicks on the button “Start image classification” Result: image classification is performed.
T170 T170.1	Voting of multiple neural network State: The user is on the classification page. He has chosen three different neural network, an image, an mode, a deployment platform. Action: User starts image classification Result: The software starts the calculations. When those finished, the software receives three lists of the result. The image class elephant has the highest probability in any results list. It is shown as result.
T180 T180.1	Choosing Input Mode State: The classification window is open. Action: The user clicks on the dropdown Menu “Input Mode” and selects “Single Images” Result: The dropdown Menu shows the selection “Single Images”. The File explorer is set to show .jpg, .png and .bmp files
T180.2	State: The detection window is open. Action: The user clicks on the dropdown Menu “Input Mode” and selects “Image Folder” Result: The dropdown Menu shows the selection “Image Folder”. The File explorer is set to show folders only.
T180.3	State: The classification window is open. A Camera is connected to the Host PC Action: The user clicks on the dropdown Menu “Input Mode” and selects “Camera” Result: The dropdown Menu shows the selection “Camera”. The File explorer button is replaced by a text label saying “Camera connected”

T180.4	<p>State: The detection window is open. A Camera is not connected to the Host PC</p> <p>Action: The user clicks on the dropdown Menu “Input Mode“ and selects “Camera“</p> <p>Result: The dropdown Menu shows the selection “Camera“. The File explorer button is replaced by a text label saying “No camera connected“</p>
T180.5	<p>State: The classification window is open.</p> <p>Action: The user clicks on the dropdown Menu “Input Mode“ and selects “txt file with Image Paths“</p> <p>Result: The dropdown Menu shows the selection “txt file with Image Paths“. The File explorer is set to show .txt files</p>
T190	Output Mode “Save all results“
T190.1	<p>State: The classification window is open. Input Mode was set to “Image Folder“ and a folder containing multiple .png images was selected. “Save all results“ has been selected. All other Input parameters have been set.</p> <p>Action: The user clicks on “start detection“</p> <p>Result: The systems calculates the classification output for each image. The output is stored in one .txt file per image as described in PD050</p>
T190.2	<p>State: The detection window is open. Input Mode was set to “txt file with Img Paths“ and a file containing multiple paths to .png images was selected. “Save all results“ has been selected. All other Input parameters have been set.</p> <p>Action: The user clicks on “start detection“</p> <p>Result: The systems calculates the detection output for each image. The output is stored in one .txt file per image as described in PD060</p>
T200	Show all results
T200.1	<p>State: The user choosed to classify five image and chose to show all results. The software awaits the results.</p> <p>Action: The software receives the results.</p> <p>Result: The first result and a continue button is shown.</p>

T210	Choosing multiple images
T210.1	<p>State: A neural network is chosen and the deployment platforms are chosen.</p> <p>Action: The user opens the file explorer and chooses three images.</p> <p>Result: The software loads the specified images.</p>
T210.2	<p>State: The specified images are loaded and ready to be classified.</p> <p>Action: The user clicks the “Classify “button.</p> <p>Result: The software calculates all images and shows one image with its result. Arrows are shown for the user to navigate the results as shown in figure 6.</p>

10 System models

10.1 Scenarios

10.1.1 Scenario 1

The user U1 wants to classify the image of a cat. He goes on the classification page and he clicks on the dropdown and sees the three operating modes “low power consumption“, “high performance“and “high energy efficiency“. He can also see the predicted power consumption and performance. He chooses to classificate in the low power mode and runs the programm. The results are shown.

10.1.2 Scenario 2

The user U2 goes to the classification page and chooses the image of a coala and the high power performance mode and CPU mode. The software states that it would take 86 watts with 166 GFLOPs. U2 decides he would rather use the high energy efficiency mode with 140 GFLOPs and 70 watts. He sets the other parameters and clicks on Start image classification. The result is that the image is a coala and shows this result.

10.1.3 Scenario 3

The user U3 created the blueprint for a new neural network in .cfg. She wants to train a network based on this config file but computation time is shared and expensive. Therefore U3 has to convince her boss. U3 uses the software with her neural network as input and selects the visualisation toolkit. U3 saves the output and uses it during the discussion to demonstrate the advantages of her new neural network.

10.1.4 Scenario 4

User U4 has to categorise a large dataset of plants from a biology field trip. U4 has two trained neural networks for this task. The first with a good accuracy and high confidence on leaves. The second with a high confidence and accuracy on flowers. On unknown objects they both tend to have a low confidence. U4 does not want to manually decide which network to use for every image. He also does not want to train a new neural network. Therefore U4 selects both networks and the folder with the new images inside, as well as the parameters save-result and dont-show results. The software classifies all images in a few minutes and he is able to handover the dataset for further documentation.

10.1.5 Scenario 5

User U5 has heard about this software and wants to test it. U5 is a pokemon fan, therefore he decides to use a new neural network to classify the newest generation pokemon. None of the provided networks was trained for that task, so U5 decides to train a new neural network. U5 copies an existing neural network layout file and adds five (5) fully connected layers in between to create a larger neural network. U5 uses his large pokemon image dataset, his new neural network layout file and the software, to train a new neural network. Afterwards U5 creates a folder with new pokemon images and uses his new network and the software to classify them.

10.1.6 Scenario 6

U6 had a trip in Africa and made a lot of pictures of animals. He looks for an easy way to know how many different species of animals he saw and took photos of. Alex doesn't know how to code or to run a program thus he needs a friendly and understandable Graphical User Interface, that our software offers. Alex opens the main menu of the software where he sees that it's possible to finish his task, without any knowledge, because of the GUI.

10.1.7 Scenario 7

U7, a company, wants to develop an AI to feed the animals at Zoos. The company does not have enough labelers to label all of the frames they need to teach the software which animal it is seeing at the moment. U7 decides to use the software for object detection. An employee goes on the Detection page of the software and uses it to label the frames required for the AI.

10.1.8 Scenario 8

The company U8 wants to teach children parallel to read, recognize percents and animals. The software is just right for the job, because of the image classification option of the software. The CEO of U8 hears about the software and wants to test it. He assigns a few employees with their kids to try the software. The results are outstanding! Because of the intuitive layout and the structure of the image classification page of the software, the kids are able to learn and also have fun at the same time.

10.2 Usecases

10.2.1 Image classification page

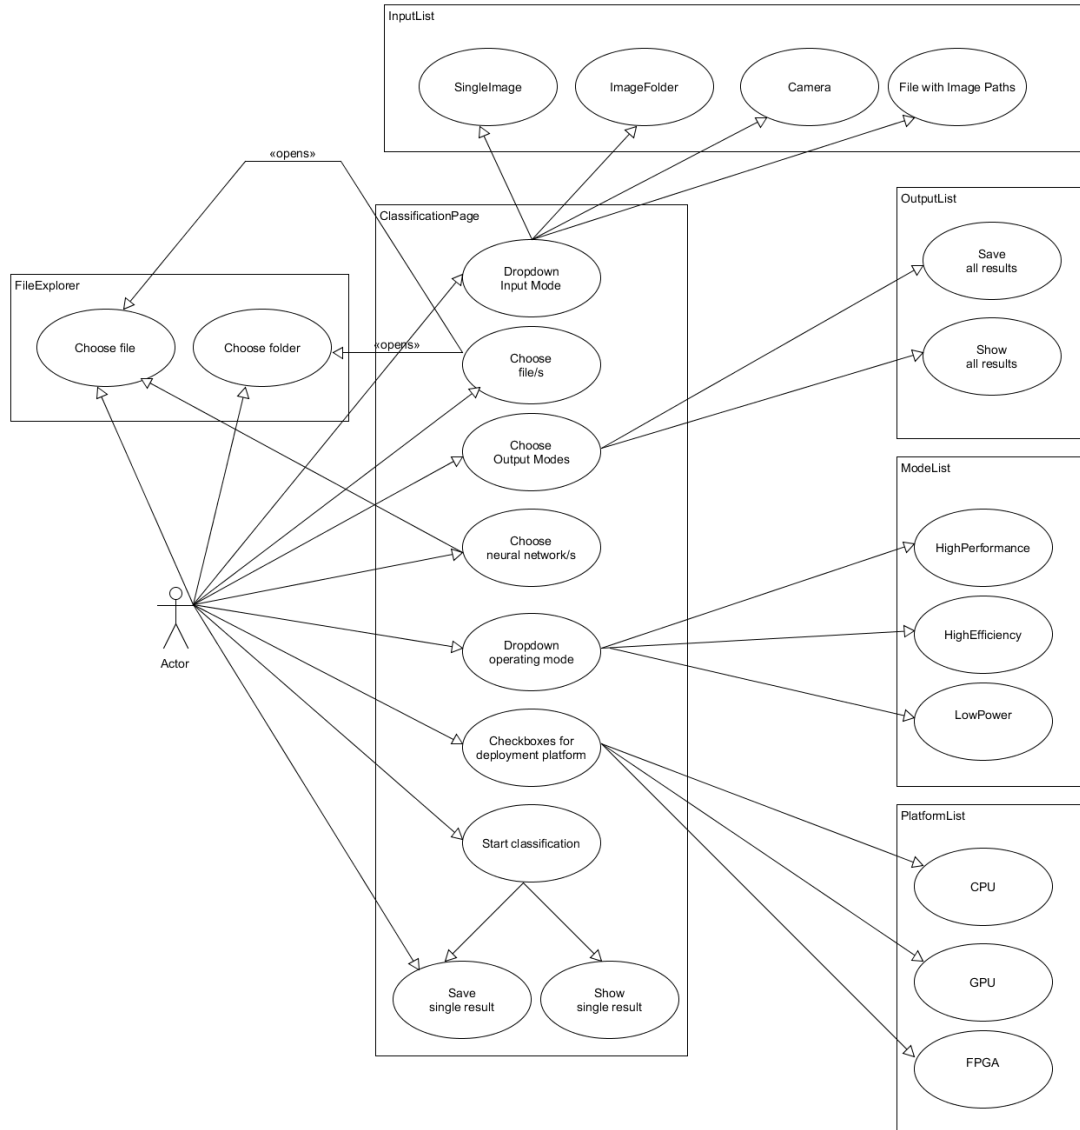


Figure 1: Usecase of the image classification page

The user can choose the kind of input with a dropdown menu. The user has the options “Single Image“, “Image Folder“, “Camera“and “File with Image paths“. Then the file explorer opens and the user can choose the input accordingly to the chosen kind of input. The user can check if he wants to save all results and show all results.

The user clicks on the button “Chose neural network/s“and the file explorer opens. The user chooses the neural network/s.

The user can choose between three operating modes “HighPerformance“, “HighEffiency“and “LowPower“.

The user can check/ uncheck the useable deployment plattforms from a list of checkboxes, for example CPU, FPGA and GPU.

The user starts the classification process. If the calculations are finished the result is shown and the user can save the single result. If he saves the result the file explorer will open and the user can choose the output directory.

10.2.2 Training page

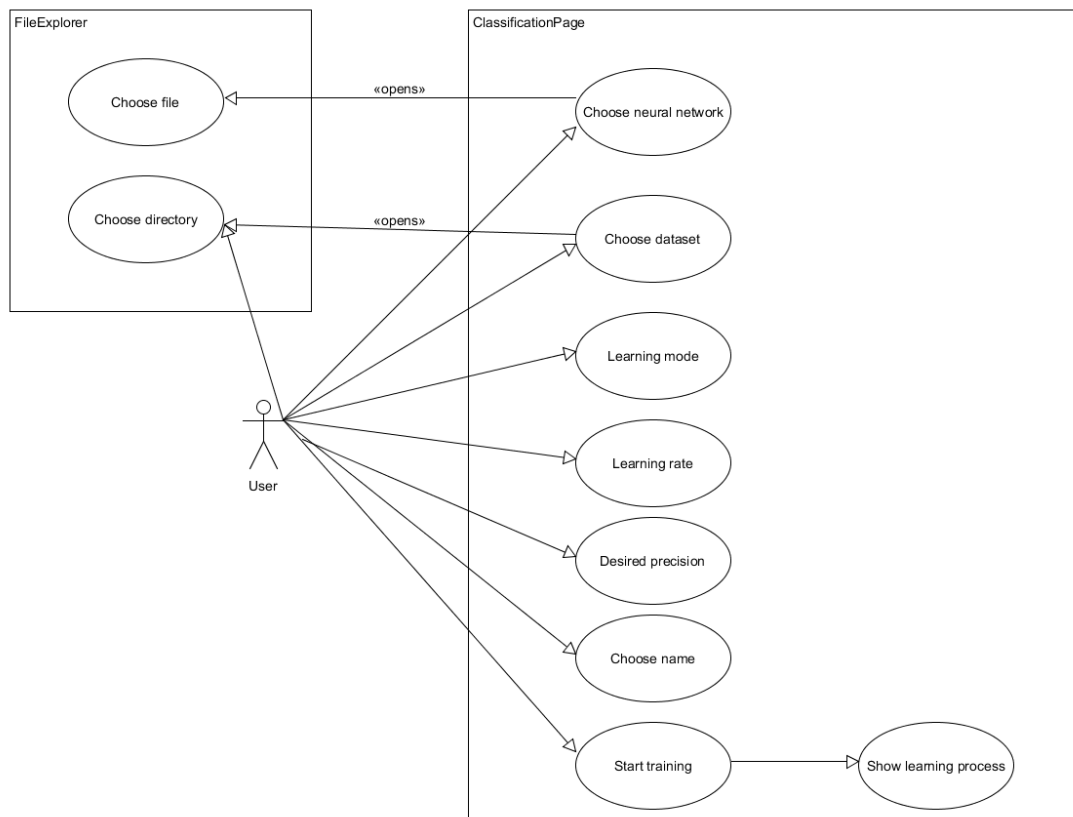


Figure 2: Usecase of the training page

The user can choose which neural network he wants to see. A file explorer opens where he can choose the .cfg file of a neural network.

The topology is displayed and the user is able to save the topology. If the user clicks the save button the file explorer opens. The user can choose a file driectory.

10.2.3 Object detection page

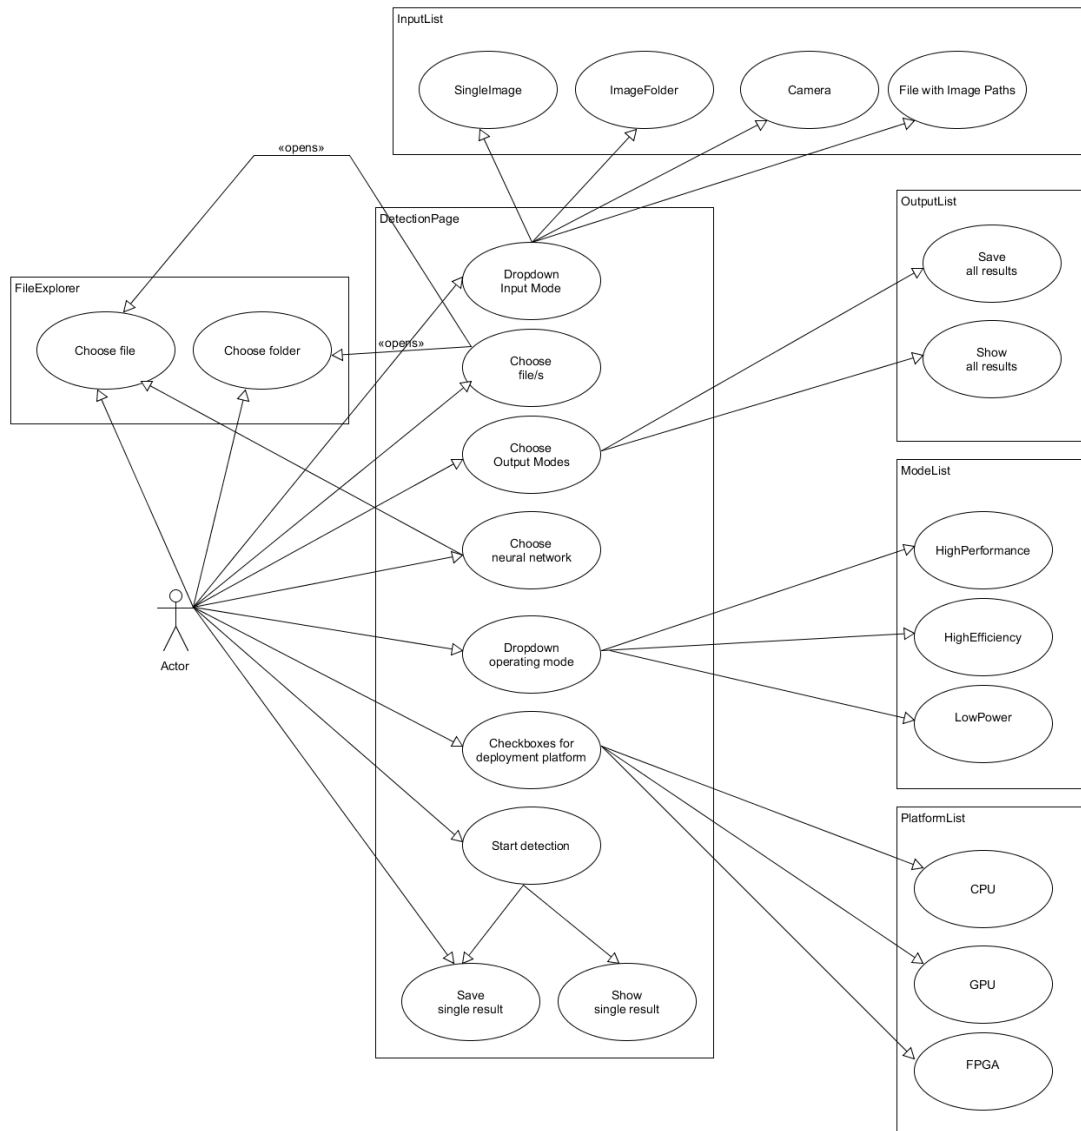


Figure 3: Usecase of the image detection page

The interaction with the software is the same as in the use case with classification. Only the result differs, as the bounding box are also calculated.

10.2.4 Show topology page

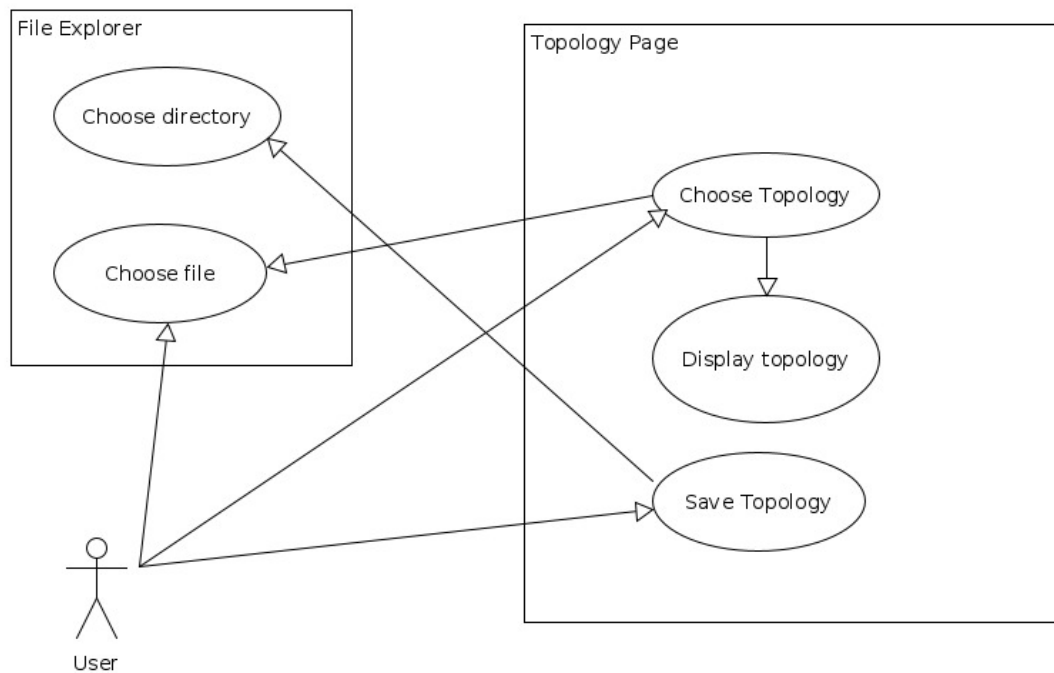


Figure 4: Usecase of the image classification page

The user must complete each of the following steps to train a neural network.

- The user must choose a .cfg file of a neural network. A file explorer is opened where he can choose the file.
- The user must enter a valid name for the new .cfg file.
- The user must choose a dataset in a file explorer.
- The user must enter a valid learning rate.
- The user must enter a learning mode.
- The user must enter a valid desired precision.
- The user can then start the training process. The learning process is displayed.

10.3 GUI

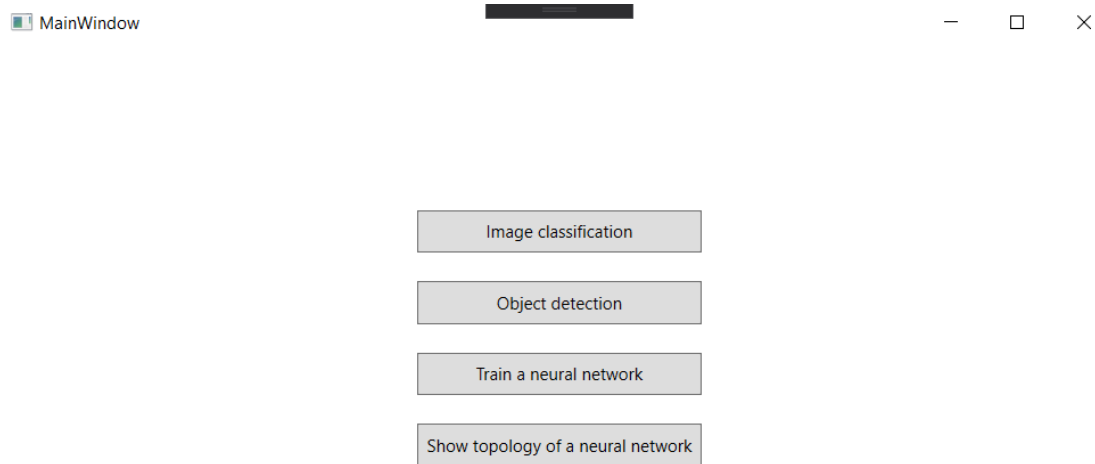


Figure 5: Main page of our software

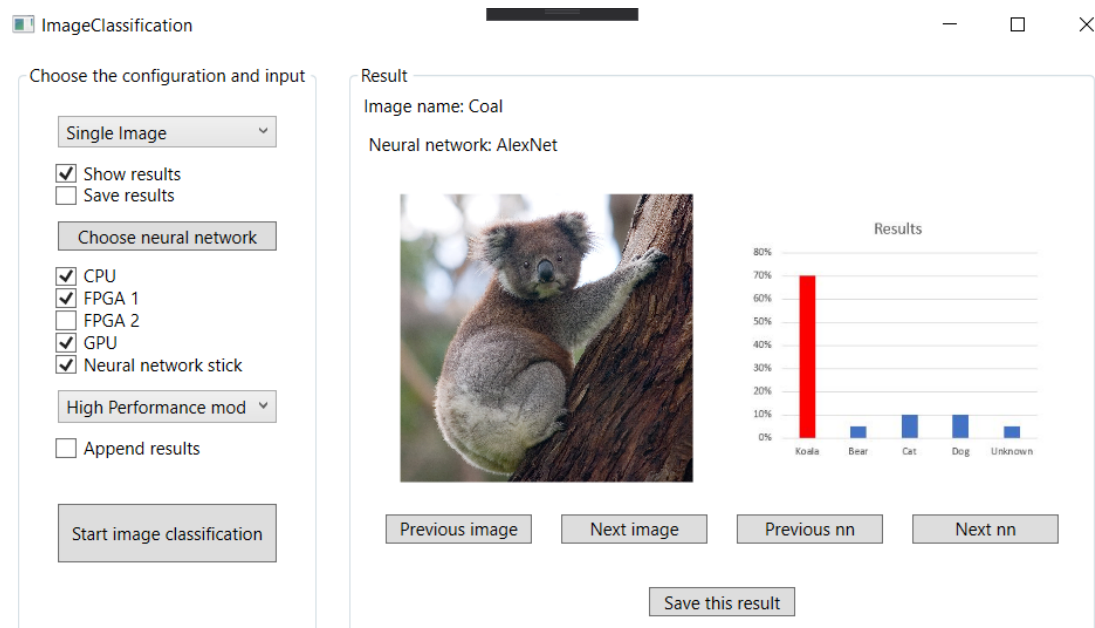


Figure 6: Image classification page of our software

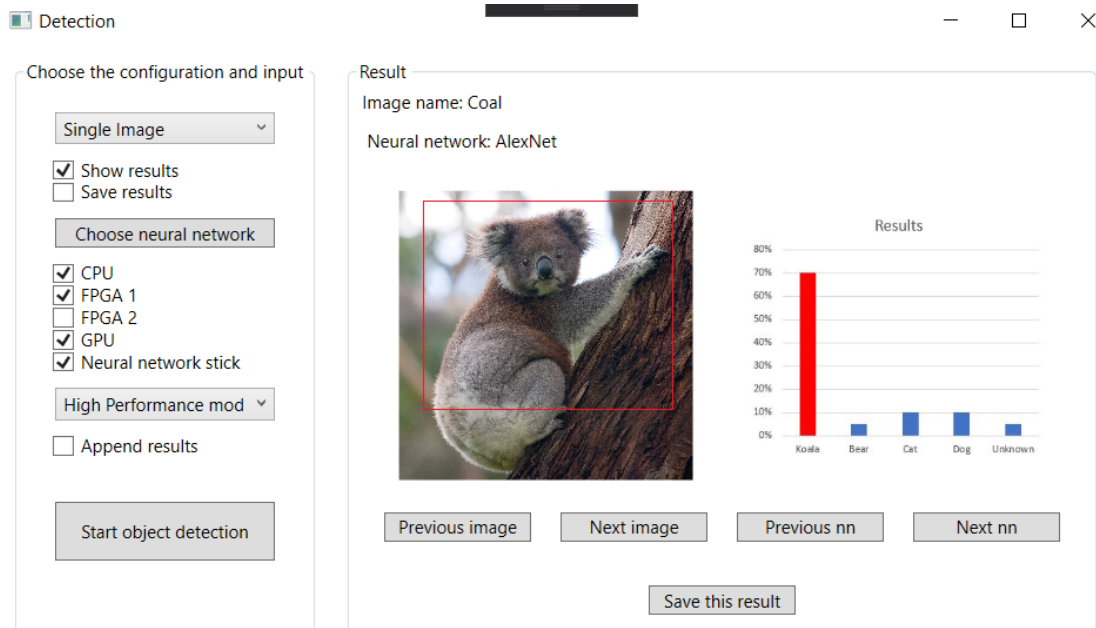


Figure 7: Object detection page of our software

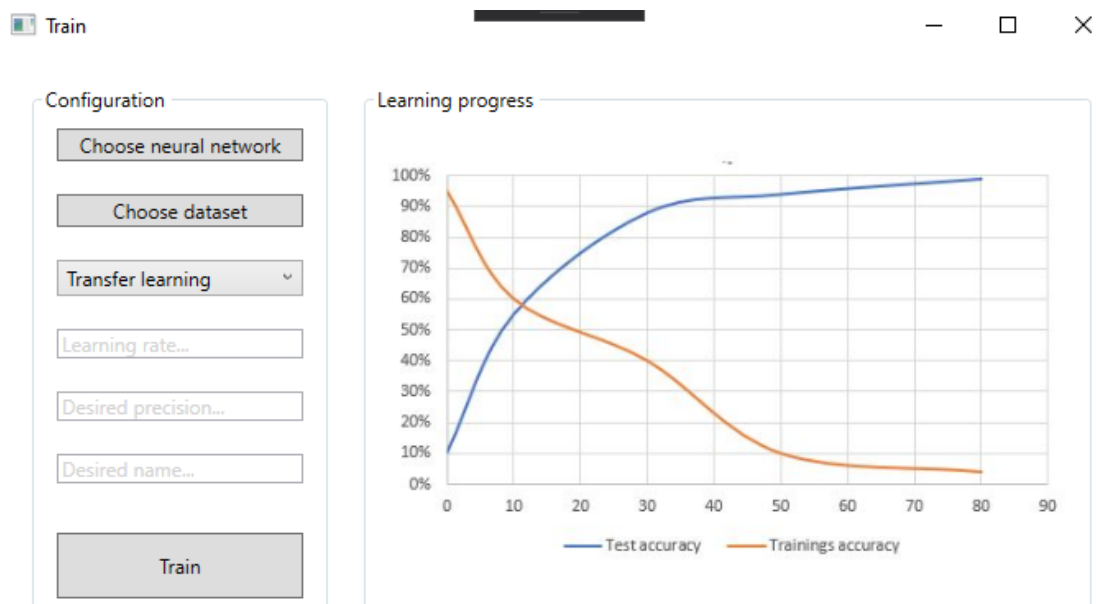


Figure 8: Training page of our software

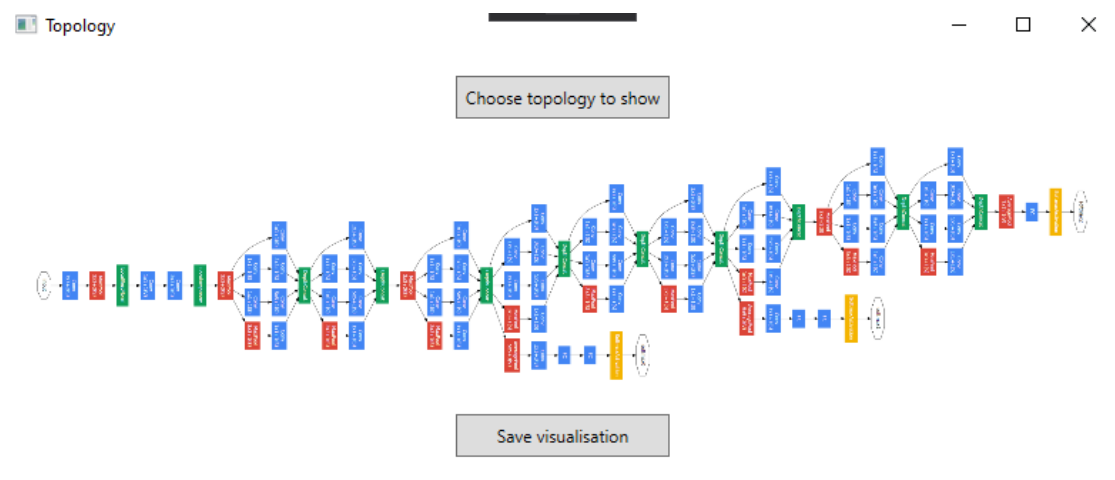


Figure 9: Page which shows the topology of a selected neural network of our software

11 Stage responsibilities

Requirements: Paul Stangel
Design: Johannes Häring
Implementation: Manuel Drehwald
Quality insurance: Stefani Guneshka
Deployment: Dimitar Dimitrov

12 Quality requirements

Name	Very relevant	Relevant	Less relevant	Not relevant
Failure tolerance	X			
Security				X
Usability		X		
Time requirement classification	X			
Time requirement detection		X		
Extendability	X			

Glossary

bandwidth The speed at which the data is transferred.

binarisation Replaces float values by bool values (0 or 1). Drastically reduces the size of neural network and improves the running time. Reduces network accuracy.

bounding box Rectangle indicating the outer edges of an object in an image.

CPU Central Processing Unit.

deployment platform Hardware to run the calculations on. (ex.: FPGA or CPU).

FLOPs Floating Point Operations Per Second.

FPGA Field Programmable Gate Array.

GPU Graphics Processing Unit.

host pc The main computer that is interacted with and used for input and output.

image A two dimensional matrix of red,green,blue (RGB) values that can be visualized as each cell represents a single pixel on the monitor. (ex.: a photo).

image class A class of the dataset on which the neural network is trained.

image classification An object that is shown in a given picture is matched to a fitting class.

neural network A network or a circuit of neurons used for information processing inspired by the way biological neural systems process data.

operating mode Description the performance and power consumption used for calculations.

performance Performance is the combination of the amount of FLOPs and the bandwidth.

power consumption The power used per second by the system in Watts.

prunning Removes the neurons from the network, which have the lowest impact to the final result. Reduces the size of neural network and improves the running time. Reduces network accuracy.