


由 Autodesk 教育版产品制作

CUSTOMER APPROVAL:

REV	DESCRIPTION	CHANGED BY	DATE
A0	First Issue	snow	2024.2.26

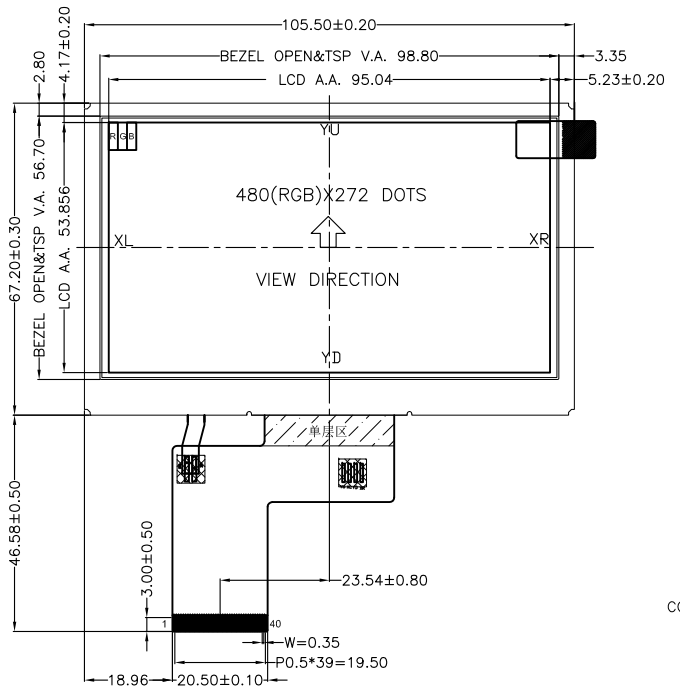

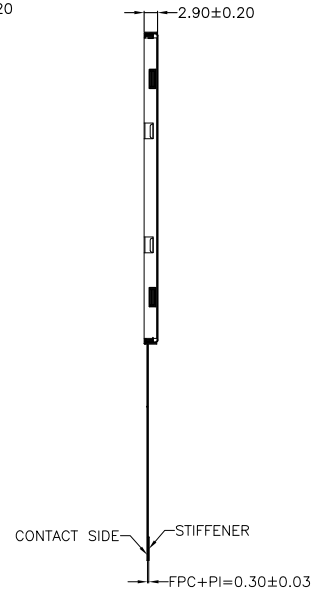


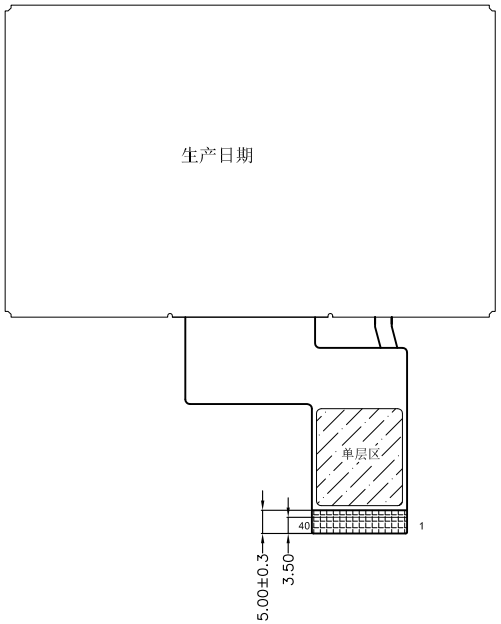

FPC INTERFACE

1	XL
2	YU
3	XR
4	YD
5	GND
6	IOVCC
7	VCI
8	TE
9	CSX/SPI CS
10	DCX/A0
11	WR/SCL
12	RDX
13	SPI SDI/SDA
14	NC
15	RESET
16	GND
17	DB0
18	DB1
19	DB2
20	DB3
21	DB4
22	DB5
23	DB6
24	DB7
25	DB8
26	DB9
27	DB10
28	DB11
29	DB12
30	DB13
31	DB14
32	DB15
33	A
34	K
35	K
36	K
37	GND
38	IM0
39	SPI4W
40	IM2

BACKLIGHT:



VF=11.2~12.8V;IF=20*2mA

	IM0	SPI4W	IM2	DB8-DB15
MCU16BIT	0	0	0	
MCU 8BIT	0	0	0	0
4SPI 1	1	1	0	
3SPI 2	1	0	0	

LCD SIZE/TYPE	4.3"/CMI TN/480*272	OPERATING TEMP.	-20°C TO +70°C
VIEWING DIRECTION	12:00	STORAGE TEMP.	-30°C TO +80°C
DRIVER IC	NV3041	BACKLIGHT	8 LED / VF=12V(TYP) / IF=20*2mA
POLARIZE TYPE	上砂0.22MM/下光0.22MM	LUMINANCE	
OPERATING VOLTAGE	VCC:2.8-3.3V	Environmental Protection	RoHS Compliant

MARK " * " ARE IMPORTANT DIMENSION,MARK "()" ARE REFERENCE DIMENSION, MARK "★" ARE SPECIAL CHARACTERISTICS RELATED TO SAFEFY, MARK "☆" ARE SPECIAL CHARACTERISTICS IRRELEVANT TO SAFEFY, MARK "●" ARE IMPORTANT CHARACTERISTICS EXCEPT FOR THE SPECIAL CHARACTERISTICS.

3rd Angle	UNIT: mm	SCALE: FIT	GDGuide
UNMARKED TOLERANCE.:±0.3	REV.: 1.0	PAGE: 1/1	
	NAME	DATE	
DRAWN BY			PART NAME: TFT MODULE
CHECKED BY			MODEL NO.: GD043WQ321Q-A
APPROVED BY			CUSTOMER NO.: /

由 Autodesk 教育版产品制作