

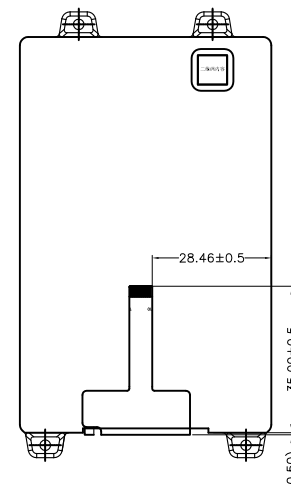


REV	DESCRIPTION	CHANGED BY	DATE
①	First Issue	snow	2024.4.19
②			
③	更改PI处丝印	snow	2025.1.7
④	更改出货方式	snow	2025.2.6
⑤	更改泡棉厚度0.3mm · 加长撕手位11mm	snow	2025.3.11

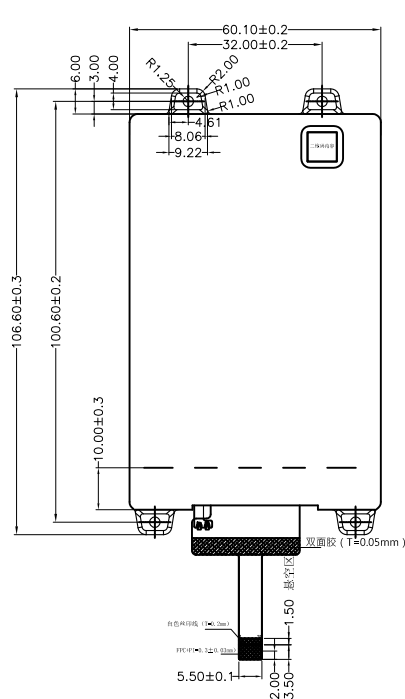

FPC弯折不撕胶出货

PIN	DESCRIPTION
10	GND
9	RESET
8	CS
7	SCL
6	SDA
5	RS
4	VDD
3	GND
2	LEDA
1	LEDK



二维码内容：
客户物料编码13位+生产日期6位+批次流水号5位

二维码实例：
440100-00002924062500001

1.客户物料编码：440100-000029
2.生产日期：240625，代表2024年6月25日
3.批次流水号：00001，不同生产日期流水号从00001开始累计

LCD SIZE/TYPE	3.98 BOE	OPERATING TEMP.	-20°C TO +70°C	3rd Angle 	UNIT: mm	SCALE: FIT		
VIEWING DIRECTION	ALL	STORAGE TEMP.	-30°C TO +80°C		UNMARKED TOLERANCE.: ±0.3	REV.: 1.0		
DRIVER IC	ST7365P	BACKLIGHT	8LED / VF=2.8~3.2V / IF=160mA	NAME		DATE		
POLARIZE TYPE	上下沙片	LUMINANCE	420 cd/m2 MIN/450 cd/m2 TYP	DRAWN BY			PART NAME	TFT MODULE
OPERATING VOLTAGE	VCC:2.8-3.3V	Environmental Protection	RoHS Compliant	CHECKED BY			MODEL NO.	GD040HV157B-A
MARK " " ARE IMPORTANT DIMENSION,MARK "()" ARE REFERENCE DIMENSION, MARK "★" ARE SPECIAL CHARACTERISTICS RELATED TO SAFETY, MARK "☆" ARE SPECIAL CHARACTERISTICS IRRELEVANT TO SAFETY, MARK "●" ARE IMPORTANT CHARACTERISTICS EXCEPT FOR THE SPECIAL CHARACTERISTICS.				APPROVED BY			CUSTOMER NO.	/

GD Guide