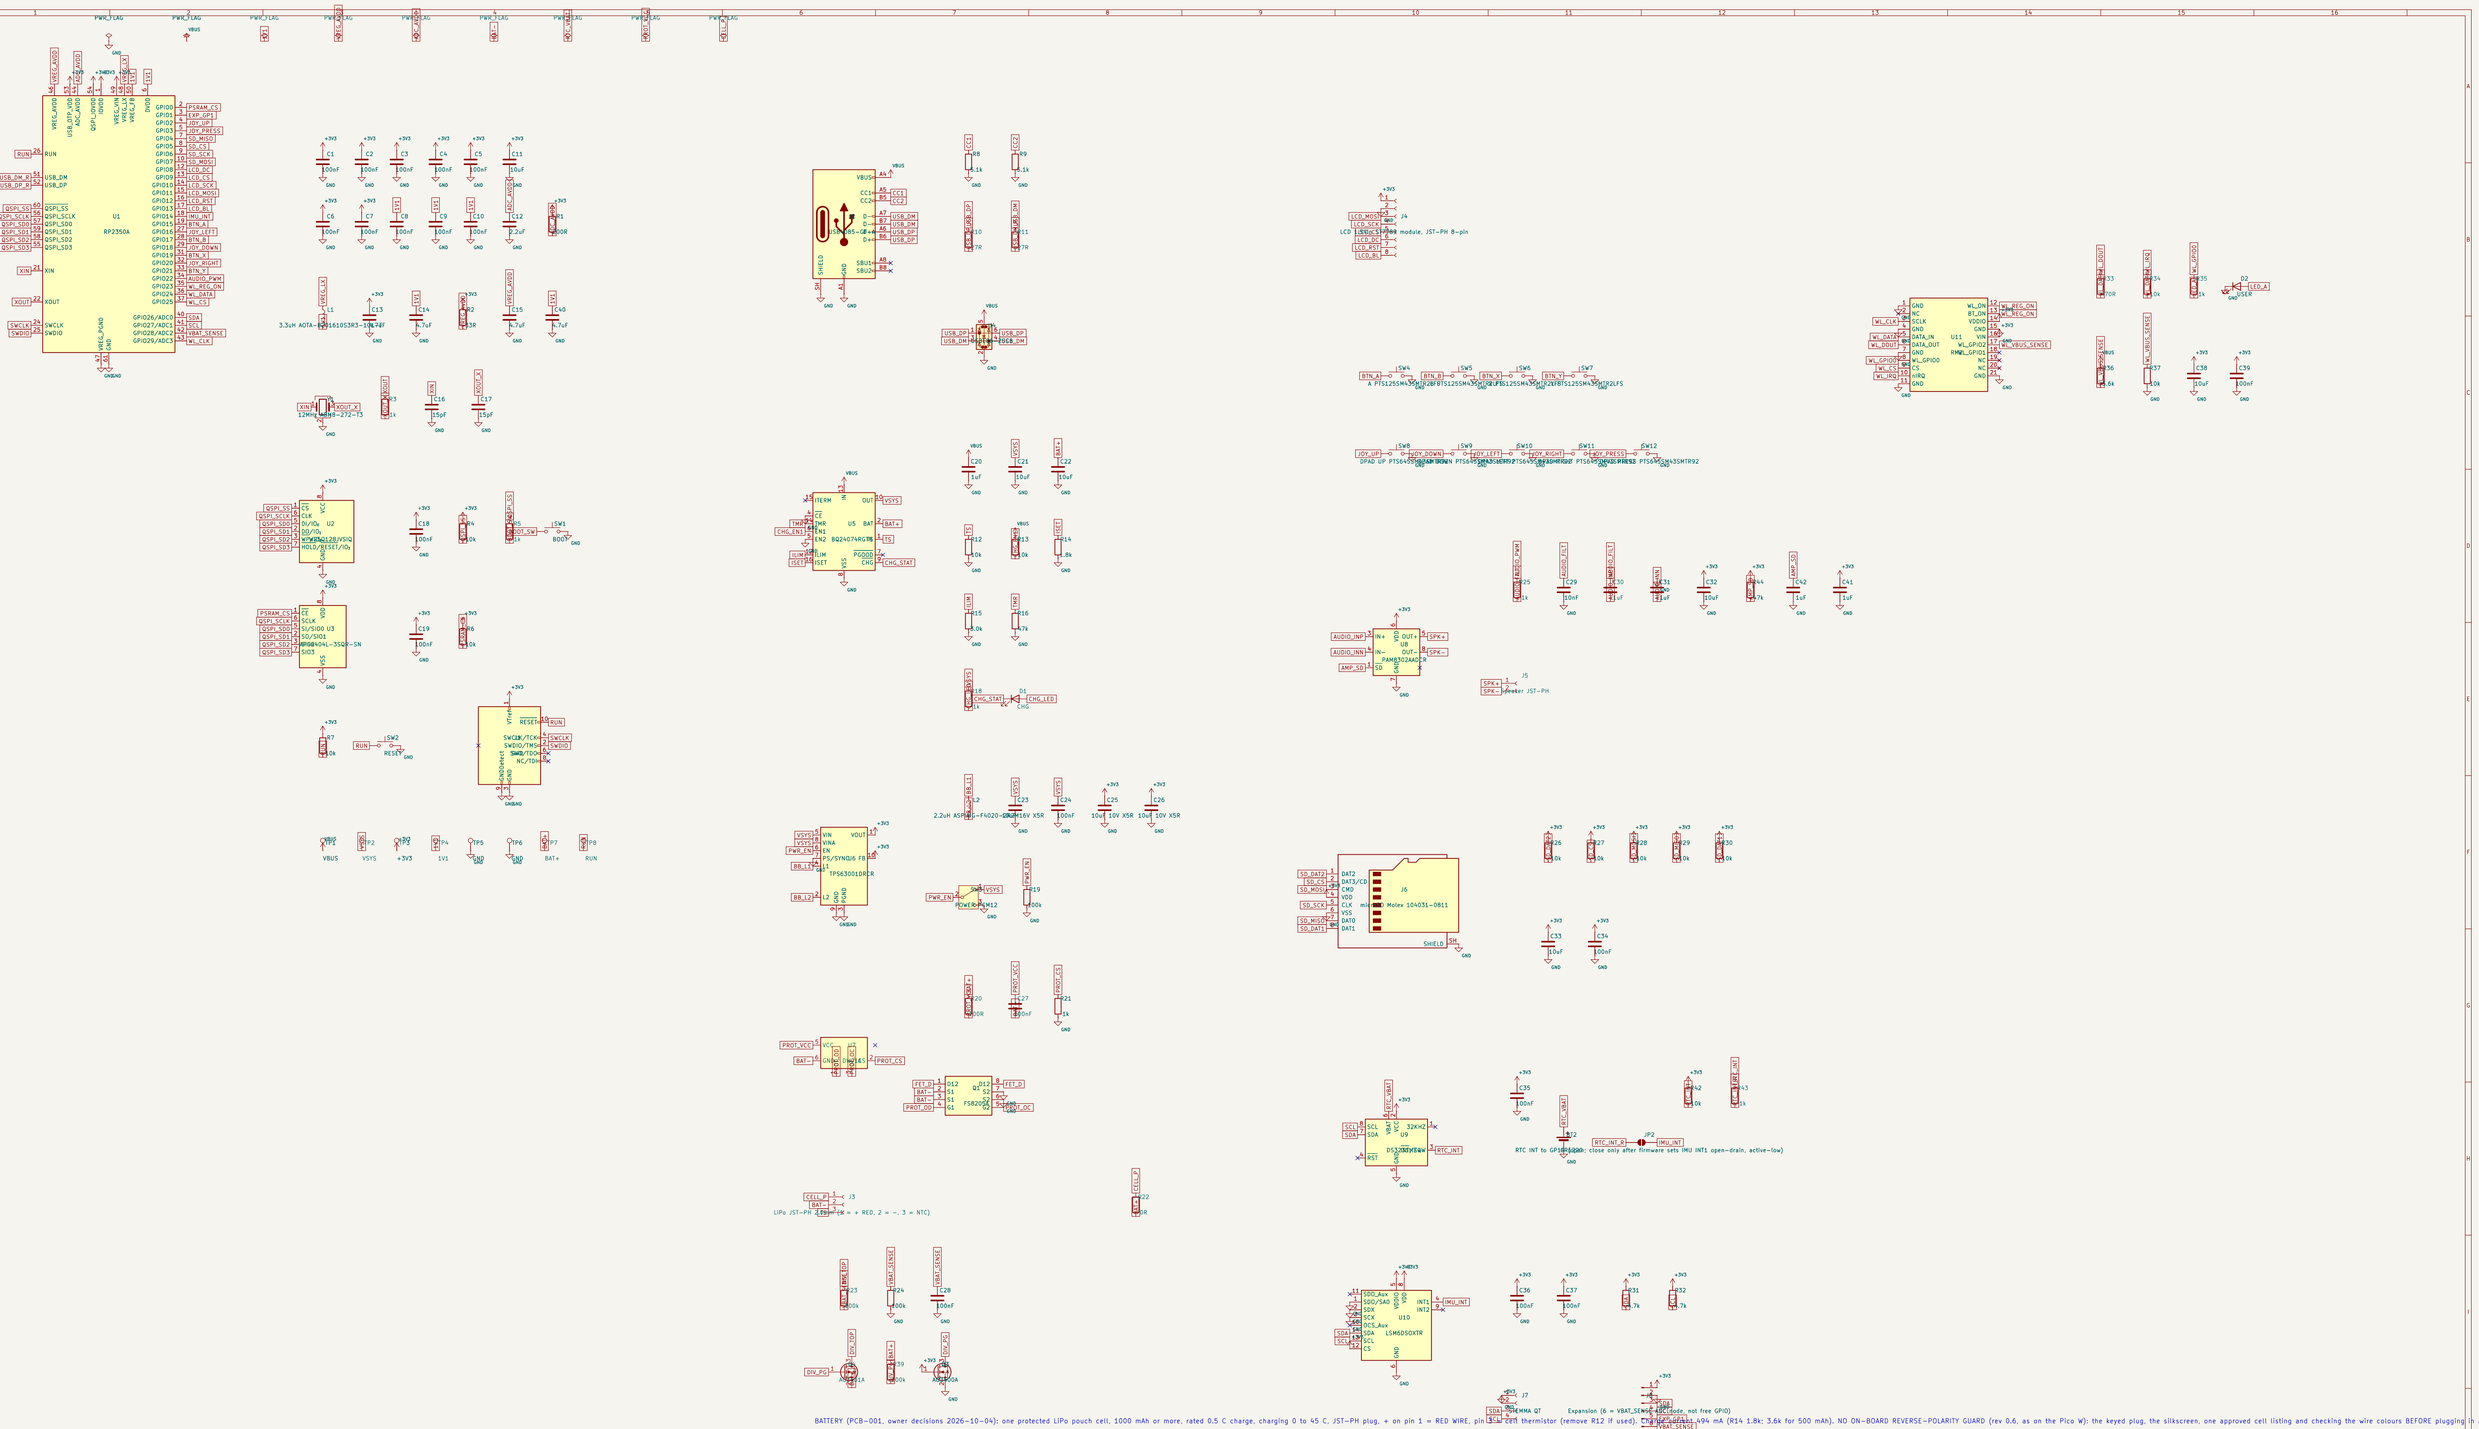


BATTERY (PCB-001, owner decisions 2026-10-04): one protected LiPo pouch cell, 1000 mAh or more, rated 0.5 C charge, charging 0 to 45 C, JST-PH plug, + on pin 1 = RED WIRE, pin 3 = NTC thermistor (remove R12 if used). Charge current 494 mA (R14 1.8k; 3.6k for 500 mAh). NO ON-BOARD REVERSE-POLARITY GUARD (rev 0.6, as on the Pico W): the keyed plug, the silkscreen, one approved cell listing and checking the wire colours BEFORE plugging in are the

Blocks left to right: core | USB, power | screen, input, audio, card, sensors | wireless.
Generated by pcb/tools/gen_sch.py from the connection table. Label-based: every pin carries its net

Pocket Chance	
Sheet: /	
File: pocket-chance-board.kicad_sch	
Title: Pocket Chance board, spin 1	
Size: A1	Date: 2026-10-04
KiCad E.D.A. 10.0.6	**Rev: 0.6**
	Id: 1/1