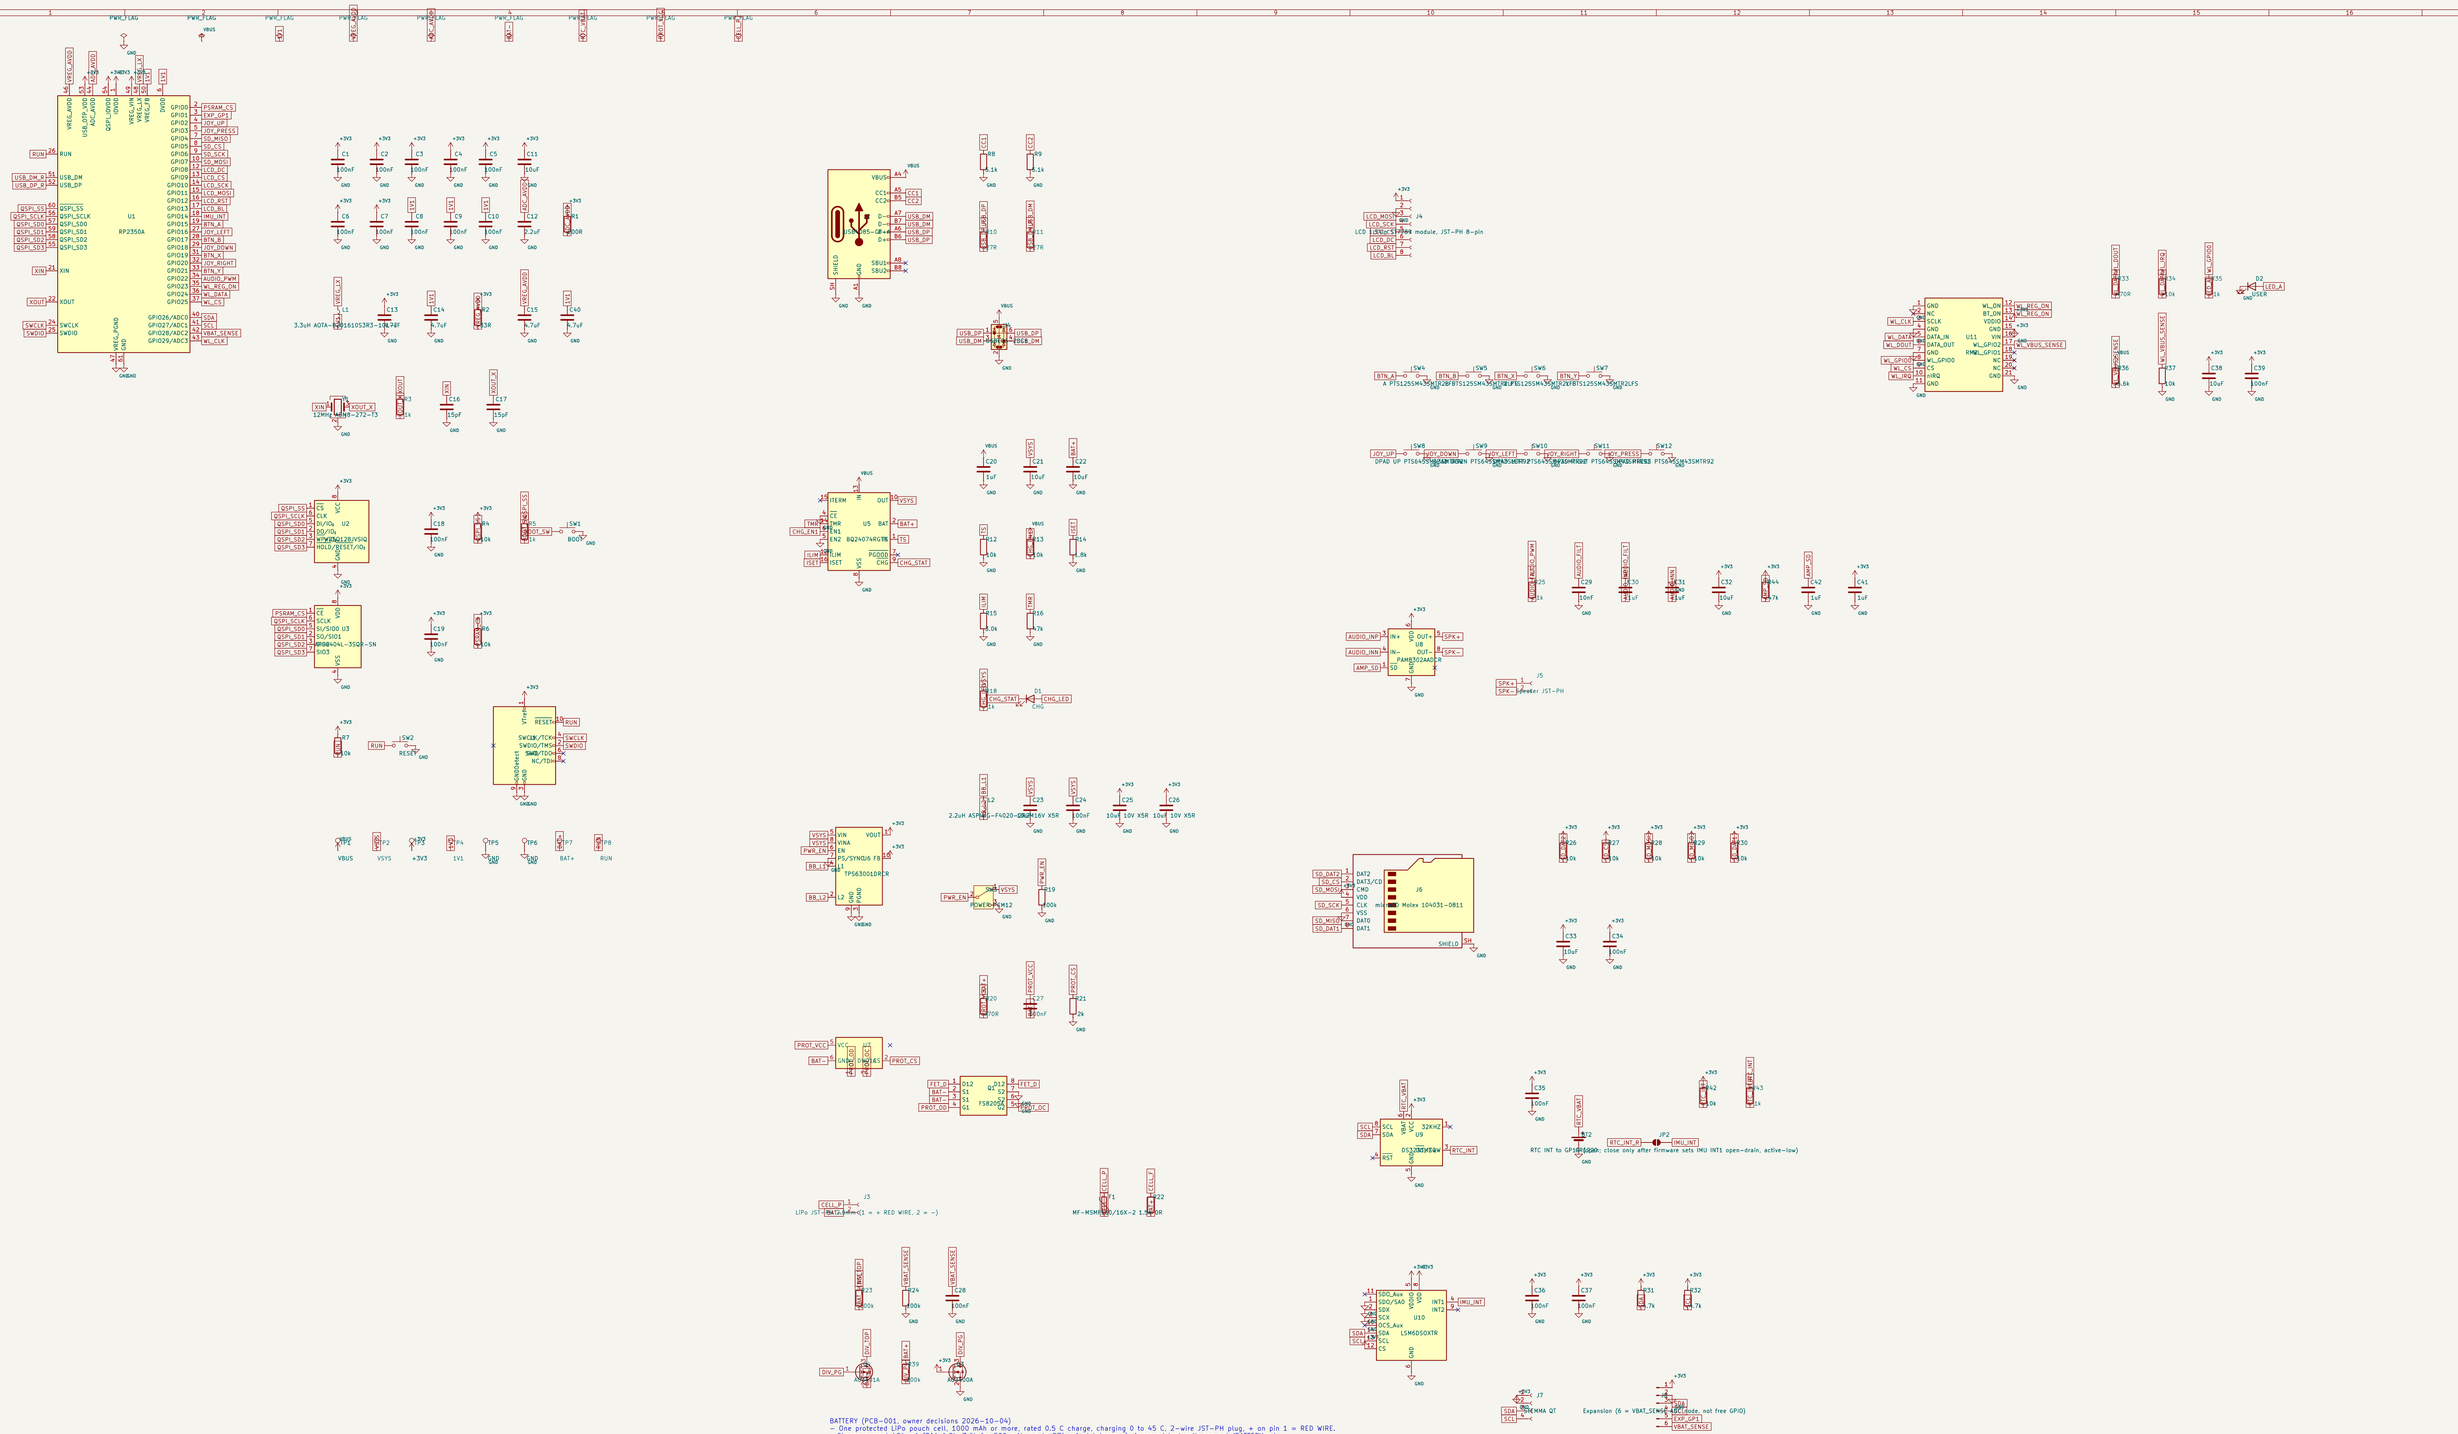


BATTERY (PCB-001, owner decisions 2026-10-04)
- One protected LiPo pouch cell, 1000 mAh or more, rated 0.5 C charge, charging 0 to 45 C, 2-wire JST-PH plug, + on pin 1 = RED WIRE.
 Charge current 494 mA (R14 1.8k; 3.6k for 500 mAh, up to 274 mA at tolerance). Approved test cell: see pcb/BATTERY.md.
- NO ON-BOARD REVERSE-POLARITY GUARD (rev 0.6, as on the Pico W). F1 polyfuse 1.5 A in the cell lead (rev 0.9) contains shorts and
 limits heat after a wiring mistake but does NOT save the two chips a reversed cell destroys. The keyed plug, the silkscreen,
 one approved cell listing and checking the wire colours BEFORE plugging in are the protection: a mis-wired cell can damage
 the DW01A and the charger's BAT pin (−0.3 V limits), UNPLUG USB BEFORE SWAPPING CELLS (the socket is live from the charger).
- The charger does not sense the cell's temperature with a two-wire cell (R12 10k fitted = check bypassed): the cell's
 protection board and the 0.5 C rate protect it. Safety timer about 6 h, longer while the charger throttles (@PPM, thermal).
- First power-ups: current-limited supply, no cell; then cell alone with the meter; then both. Charge on a non-flammable
 surface, never unattended. A tripped F1 resets only after the cell is unplugged.