


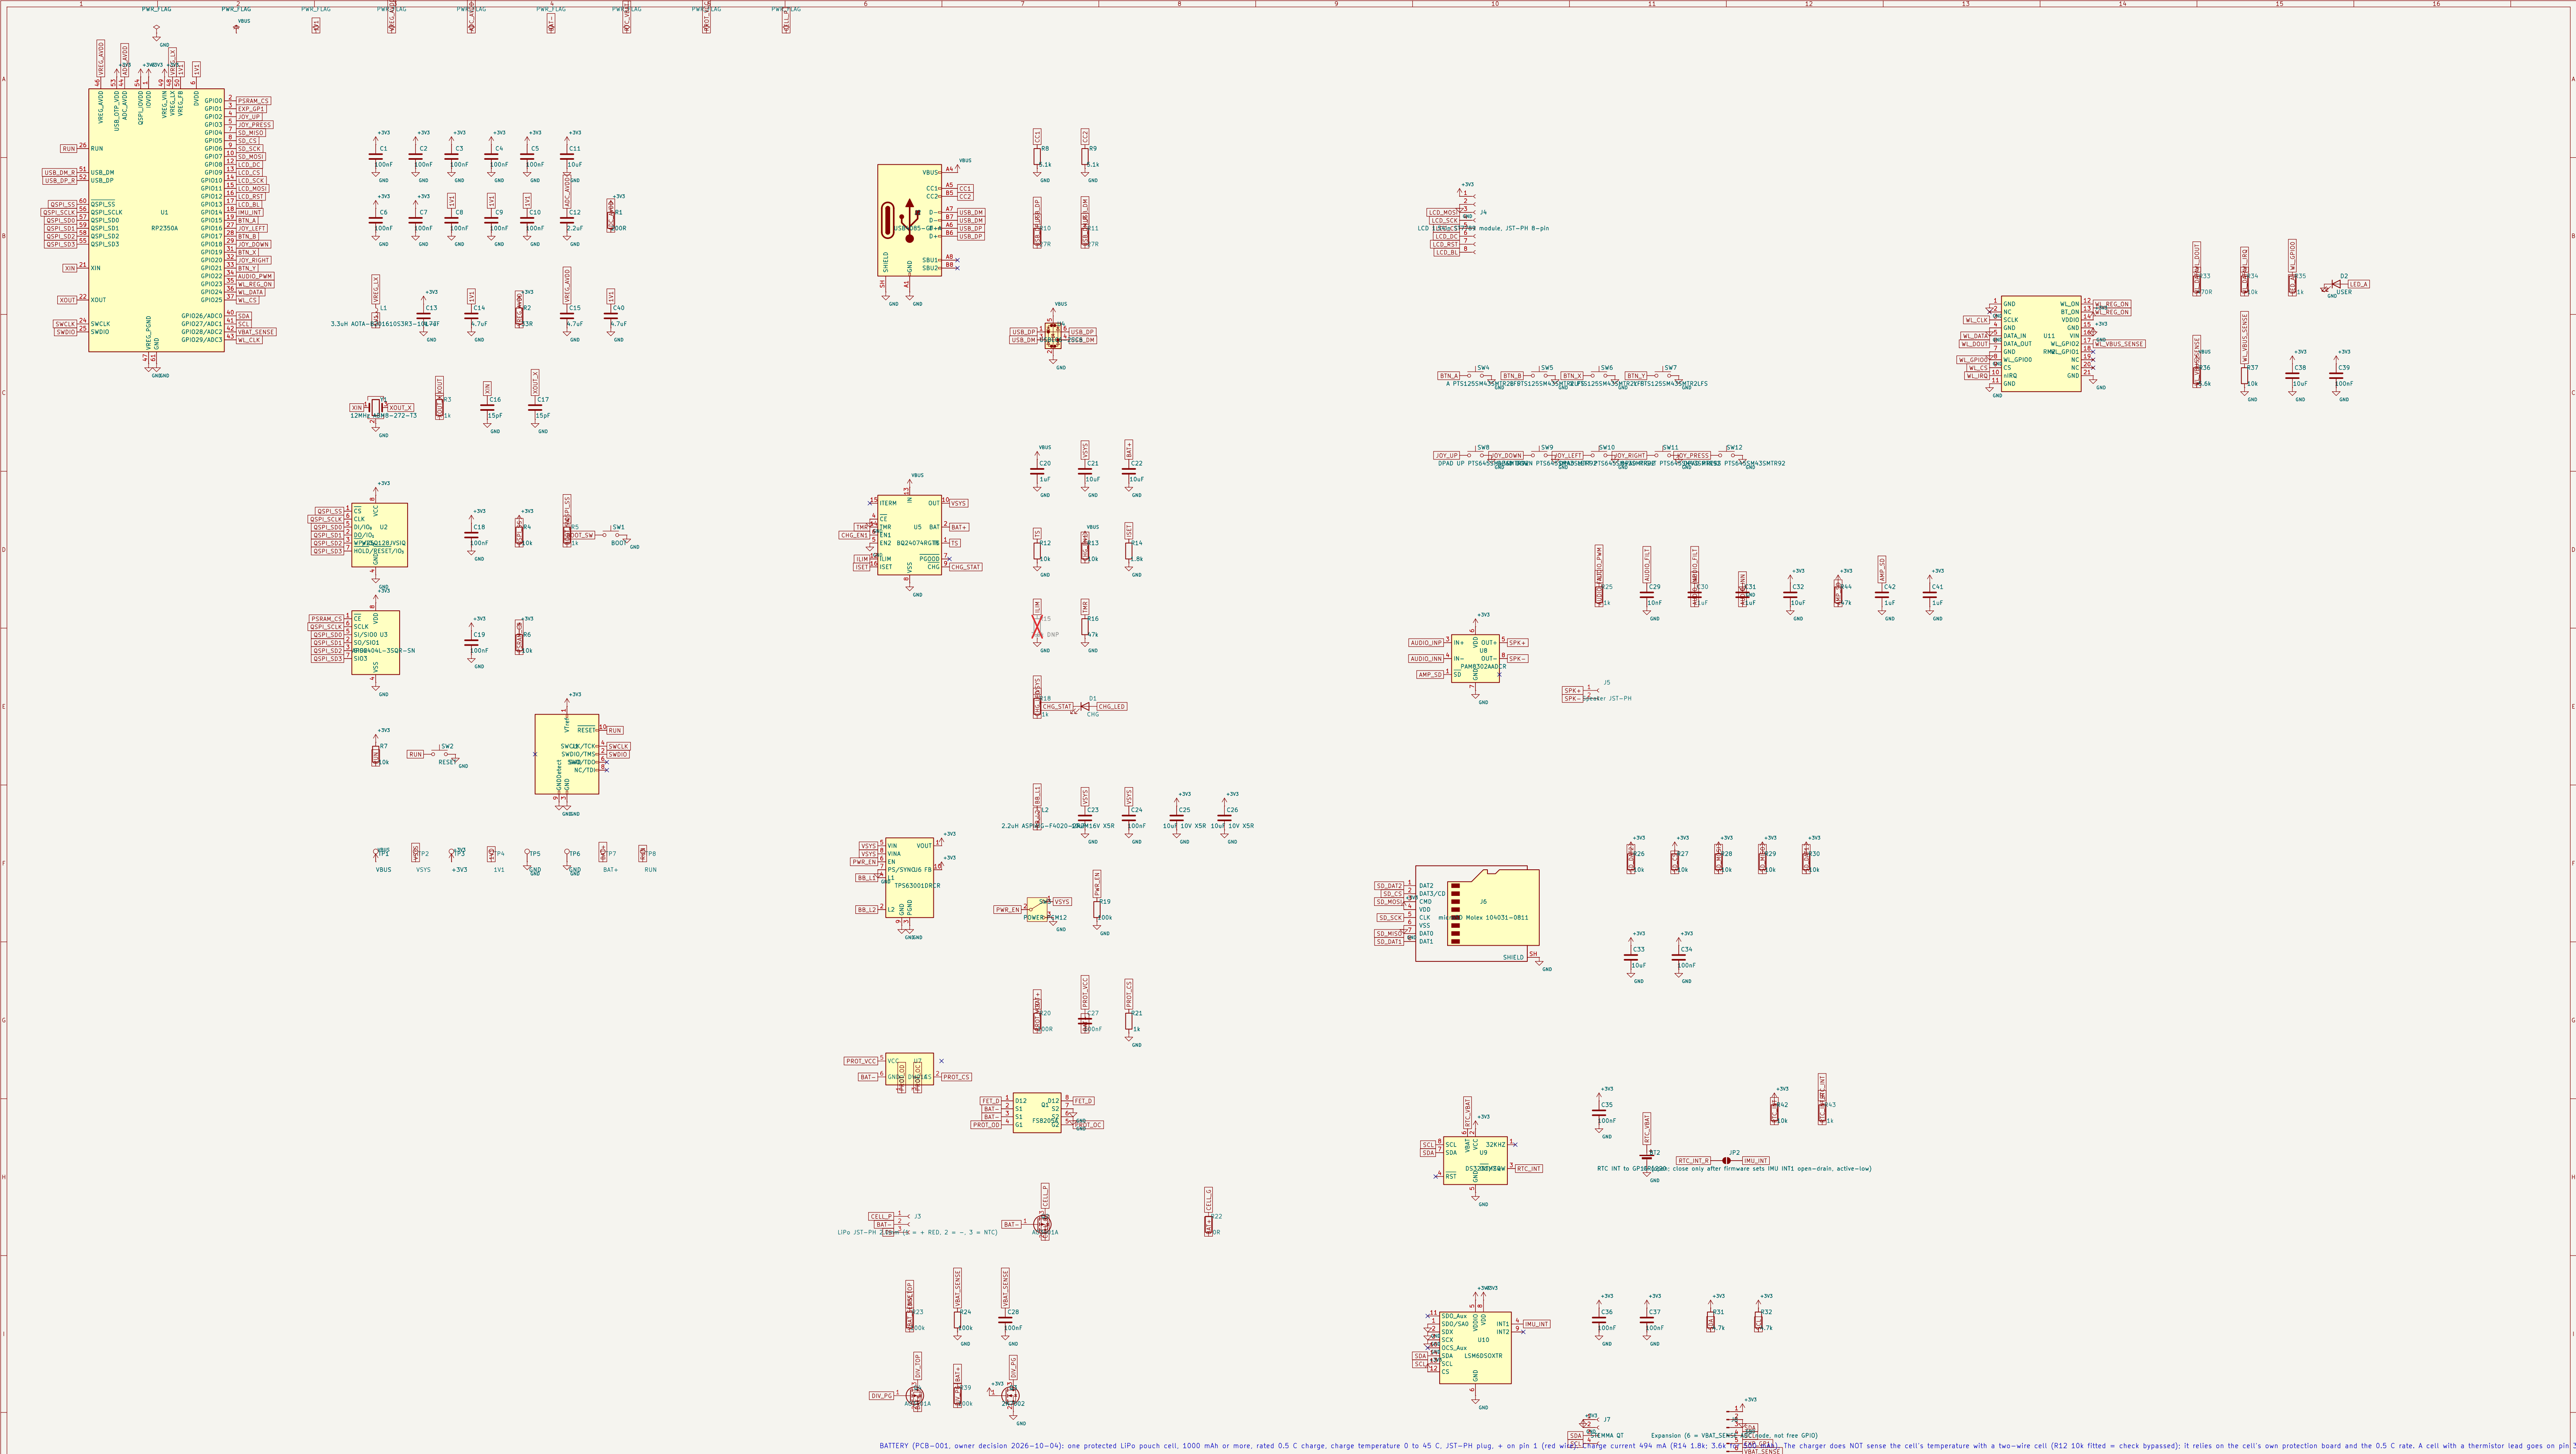

BATTERY (PCB=001, owner decision 2026-10-04): one protected LiPo pouch cell, 1000 mAh or more, rated 0.5 C charge, charge temperature 0 to 45 C, JST-PH plug, + on pin 1 (red wire), max charge current 494 mA (R14 1.8k: 3.6V/7.2V/1.8k=494mA). The charger does NOT sense the cell's temperature with a two-wire cell (R12 10k fitted = check bypassed): it relies on the cell's own protection board and the 0.5 C rate. A cell with a thermistor lead goes on pin 3; then re