

MAX-M10S / PASSIVE ANTENNA / 3.3 V ONLY

A. External regulated 3.3 V; no 5 V tolerance






B. GNSS core / default low-gain internal LNA

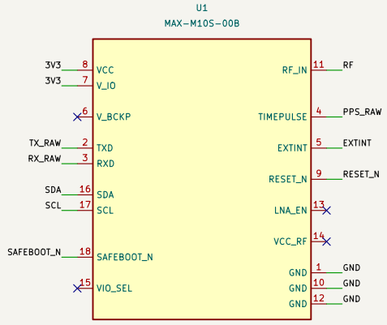


C. Passive 50 ohm coax / NO antenna power








D. Breadboard headers: body BELOW board






UART module TX -> controller RX; module RX <- controller TX




F. Power LED and buffered PPS LED





G. Test pads



REV C: NO BACKUP SUPPLY. U1 pin 6 V_BCKP intentionally open. No battery or supercapacitor.

3.3 V POWER AND LOGIC ONLY. Host must reconfigure GNSS after complete power removal.

Host time and M10-compatible orbit aiding can reduce cold-start TTFF; performance requires validation.

C1/C2 local bypass; C3 bulk. U1 VCC_RF, LNA_EN and VIO_SEL intentionally open.

UART 9600 8N1 / I2C 0x42. Disconnect host signals before removing GNSS supply. PPS is not FIX.

25.0 x 36.5 mm; 4 layers; bottom-inserted 2.54 mm headers; 17.78 mm row spacing.

Passive antenna; no coax power; JLCPCB Standard assembly candidate

3.3 V POWER AND LOGIC ONLY

Sheet: /
File: MAX-M10S-Passive.kicad_sch

Title: MAX-M10S Passive Antenna Breadboard Breakout

Size: A3	Date: 2026-09-21	**Rev: C**
KiCad E.D.A. 10.0.6		Id: 1/1