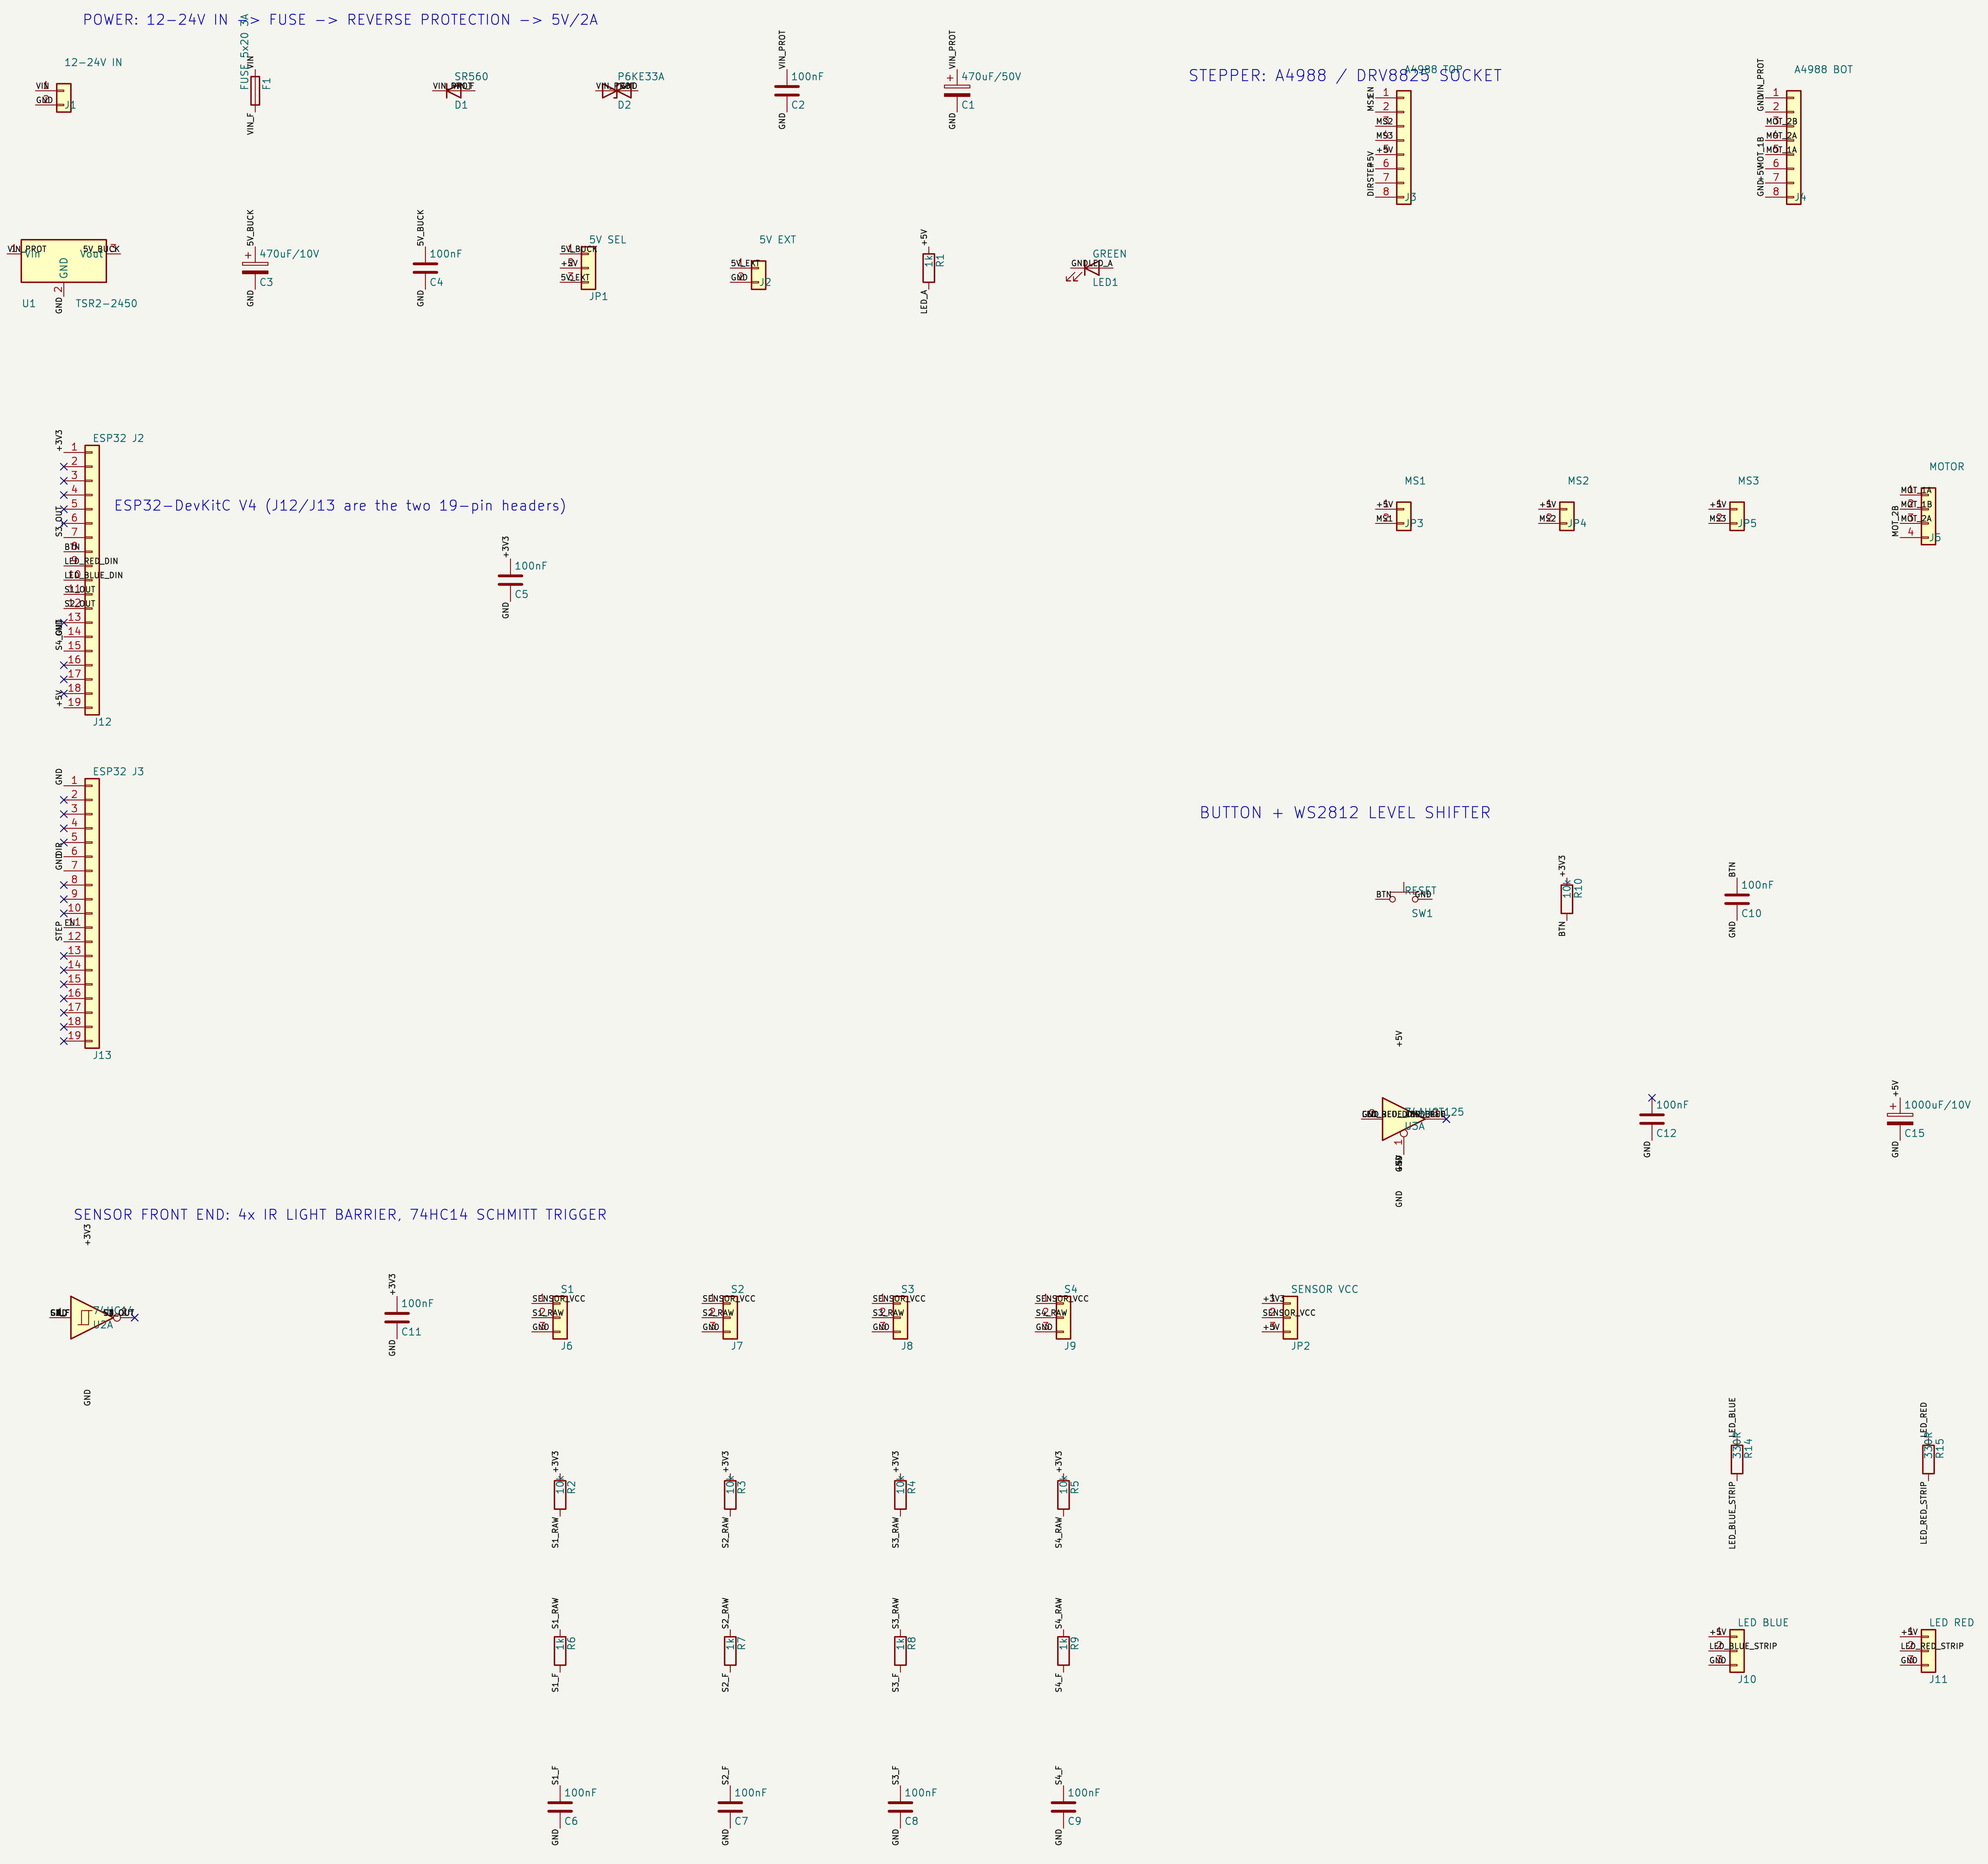

IR BEAM BLOCKED = GPIO HIGH (74HC14 INVERTS)

JP1: 1-2 = INTERNAL 5V, 2-3 = EXTERNAL 5V

JP2: 1-2 = 3V3 SENSORS, 2-3 = 5V SENSORS

JP3..JP5 CLOSED = MICROSTEP PIN HIGH

S1..S4: 1=VCC 2=OUT 3=GND

A4988 RST/SLP ARE TIED TO +5V

LED CONNECTORS: 1=5V 2=DIN 3=GND

ESP32-DevKitC + A4988 + 4x IR light barrier + 2x WS2812B

Sheet: /
File: Drehfussball_Controller.kicad_sch

Title: Drehfussball Controller v1.0

Size: A2	Date: 2026-10-20	**Rev: 1.0**
KiCad E.D.A. 9.0.2		Id: 1/1