
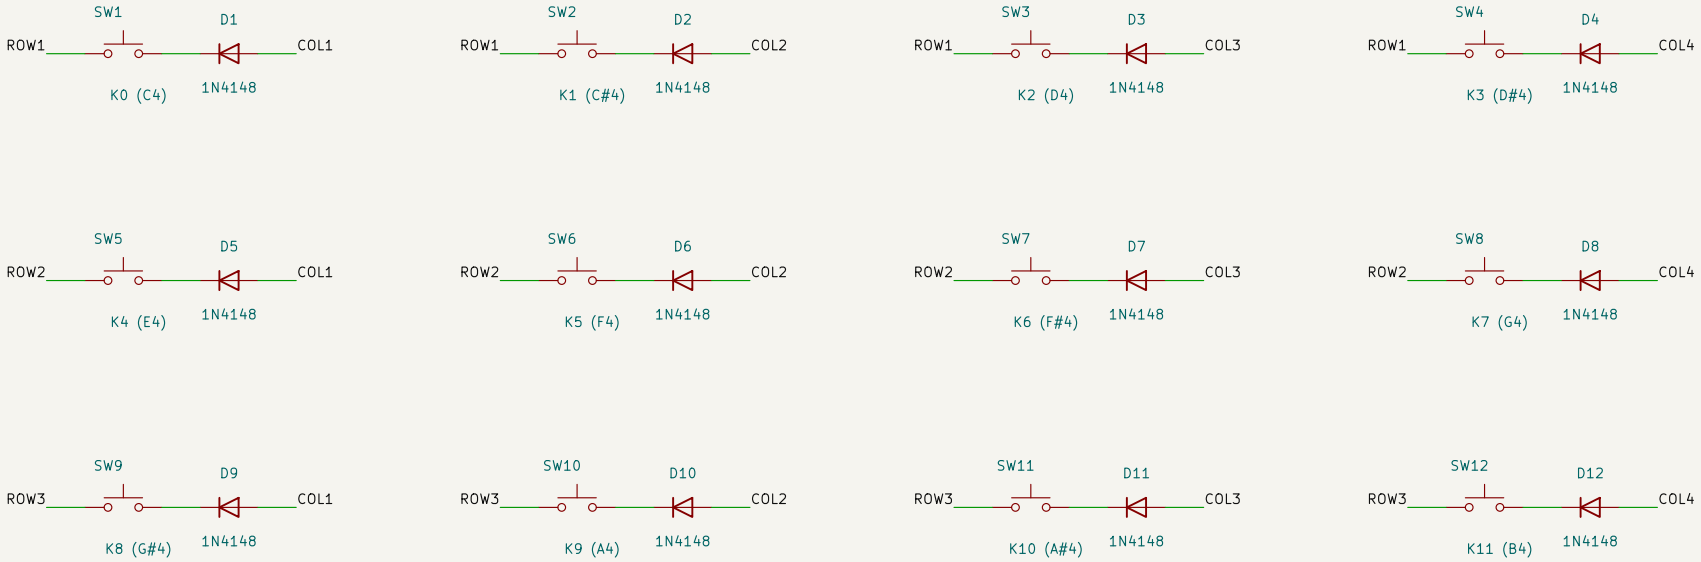




J1 pin1..7 = GP1..GP7

ROW1~3 = GP1~3 (output, drive LOW in turn, Hi-Z when idle)

COL1~4 = GP4~7 (input with internal pull-up, no external parts)

Each key: ROW -- SW -- 1N4148 -- COL; diode cathode (band) faces ROW (COL2ROW)

K0..K11 -> MIDI note 60..71; firmware: matrix_12key.py

Diode per key, cathode to ROW. Firmware: matrix_12key.py

Sheet: /
File: midi_matrix.kicad_sch

Title: 12-key 3x4 Matrix MIDI Keyboard (COL2ROW)

Size: A4	Date: 2026-10-19	**Rev: 1.0**
KiCad E.D.A. 10.0.7		Id: 1/1