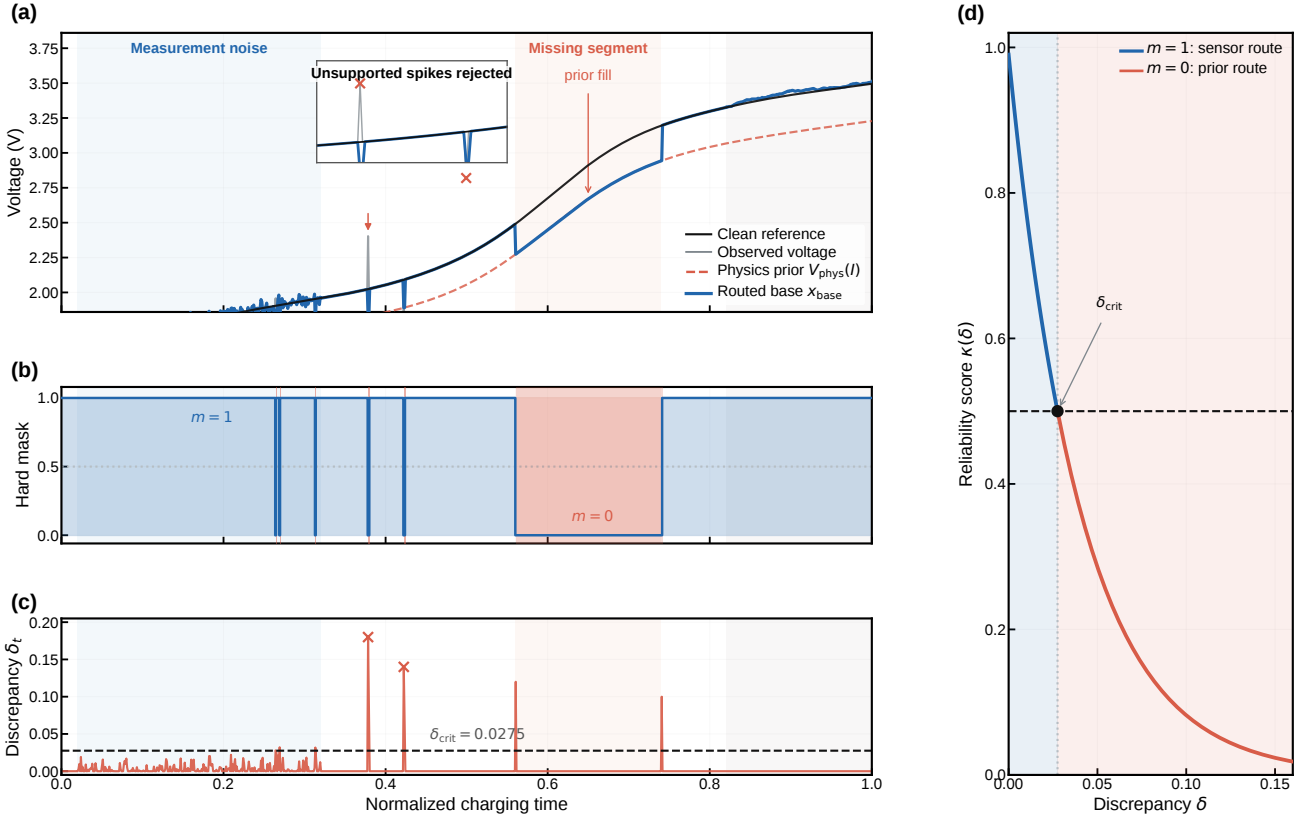

(a)
Measurement noise
Missing segment
prior fill
Unsupported spikes rejected
Voltage (V)
Clean reference
Observed voltage
Physics prior $V_{phys}(I)$
Routed base x_{base}
(b)
Hard mask
$m = 1$
$m = 0$
(c)
Discrepancy δ_t
$\delta_{crit} = 0.0275$
Normalized charging time
(d)
$m = 1$: sensor route
$m = 0$: prior route
δ_{crit}
Reliability score $\kappa(\delta)$
Discrepancy δ