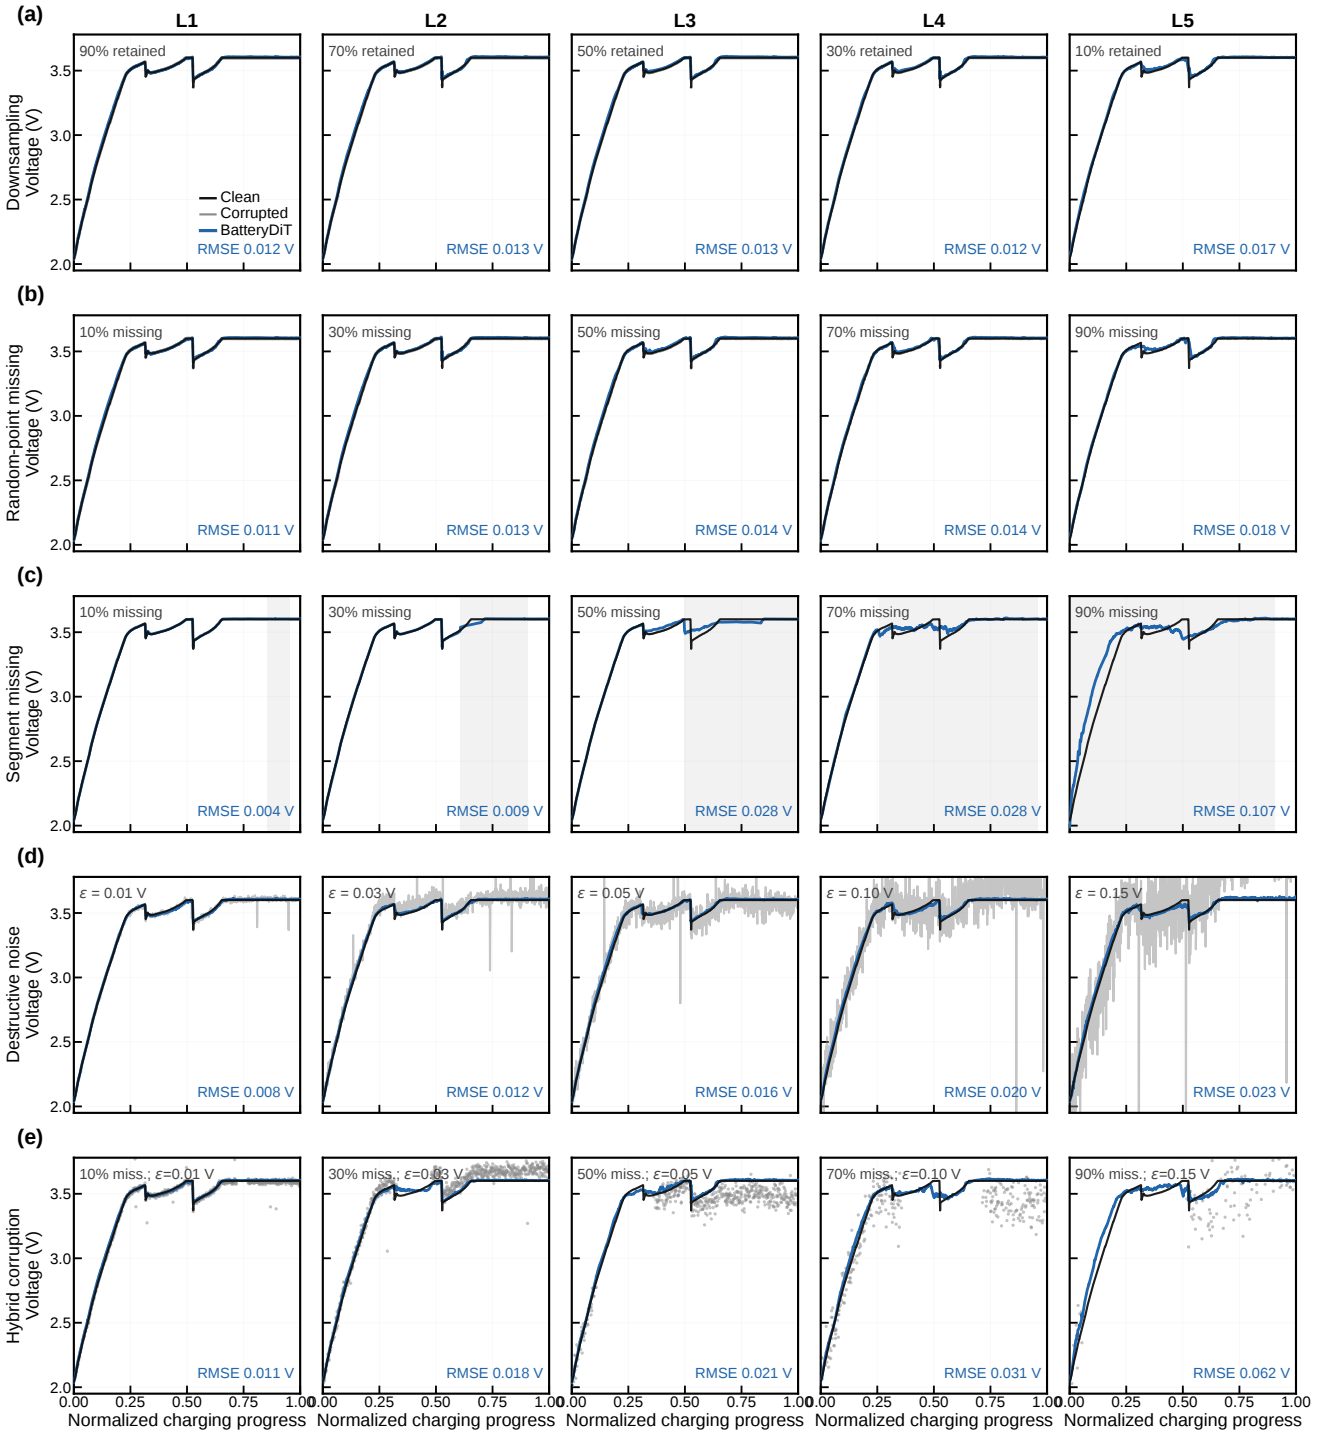

(a)
L1
L2
L3
L4
L5
Downsampling
Voltage (V)
90% retained
70% retained
50% retained
30% retained
10% retained
Clean
Corrupted
BatteryDiT
RMSE 0.012 V
RMSE 0.013 V
RMSE 0.013 V
RMSE 0.012 V
RMSE 0.017 V
(b)
Random-point missing
Voltage (V)
10% missing
30% missing
50% missing
70% missing
90% missing
RMSE 0.011 V
RMSE 0.013 V
RMSE 0.014 V
RMSE 0.014 V
RMSE 0.018 V
(c)
Segment missing
Voltage (V)
10% missing
30% missing
50% missing
70% missing
90% missing
RMSE 0.004 V
RMSE 0.009 V
RMSE 0.028 V
RMSE 0.028 V
RMSE 0.107 V
(d)
Destructive noise
Voltage (V)
ε = 0.01 V
ε = 0.03 V
ε = 0.05 V
ε = 0.10 V
ε = 0.15 V
RMSE 0.008 V
RMSE 0.012 V
RMSE 0.016 V
RMSE 0.020 V
RMSE 0.023 V
(e)
Hybrid corruption
Voltage (V)
10% miss.; ε=0.01 V
30% miss.; ε=0.03 V
50% miss.; ε=0.05 V
70% miss.; ε=0.10 V
90% miss.; ε=0.15 V
RMSE 0.011 V
RMSE 0.018 V
RMSE 0.021 V
RMSE 0.031 V
RMSE 0.062 V
2.0
2.5
3.0
3.5
0.00
0.25
0.50
0.75
1.00
Normalized charging progress