

1. Description


1.1. Project

Project Name	throttle
Board Name	throttle
Generated with:	STM32CubeMX 4.20.0
Date	04/04/2017

1.2. MCU

MCU Series	STM32L4
MCU Line	STM32L4x6
MCU name	STM32L476RGTx
MCU Package	LQFP64
MCU Pin number	64


2. Pinout Configuration

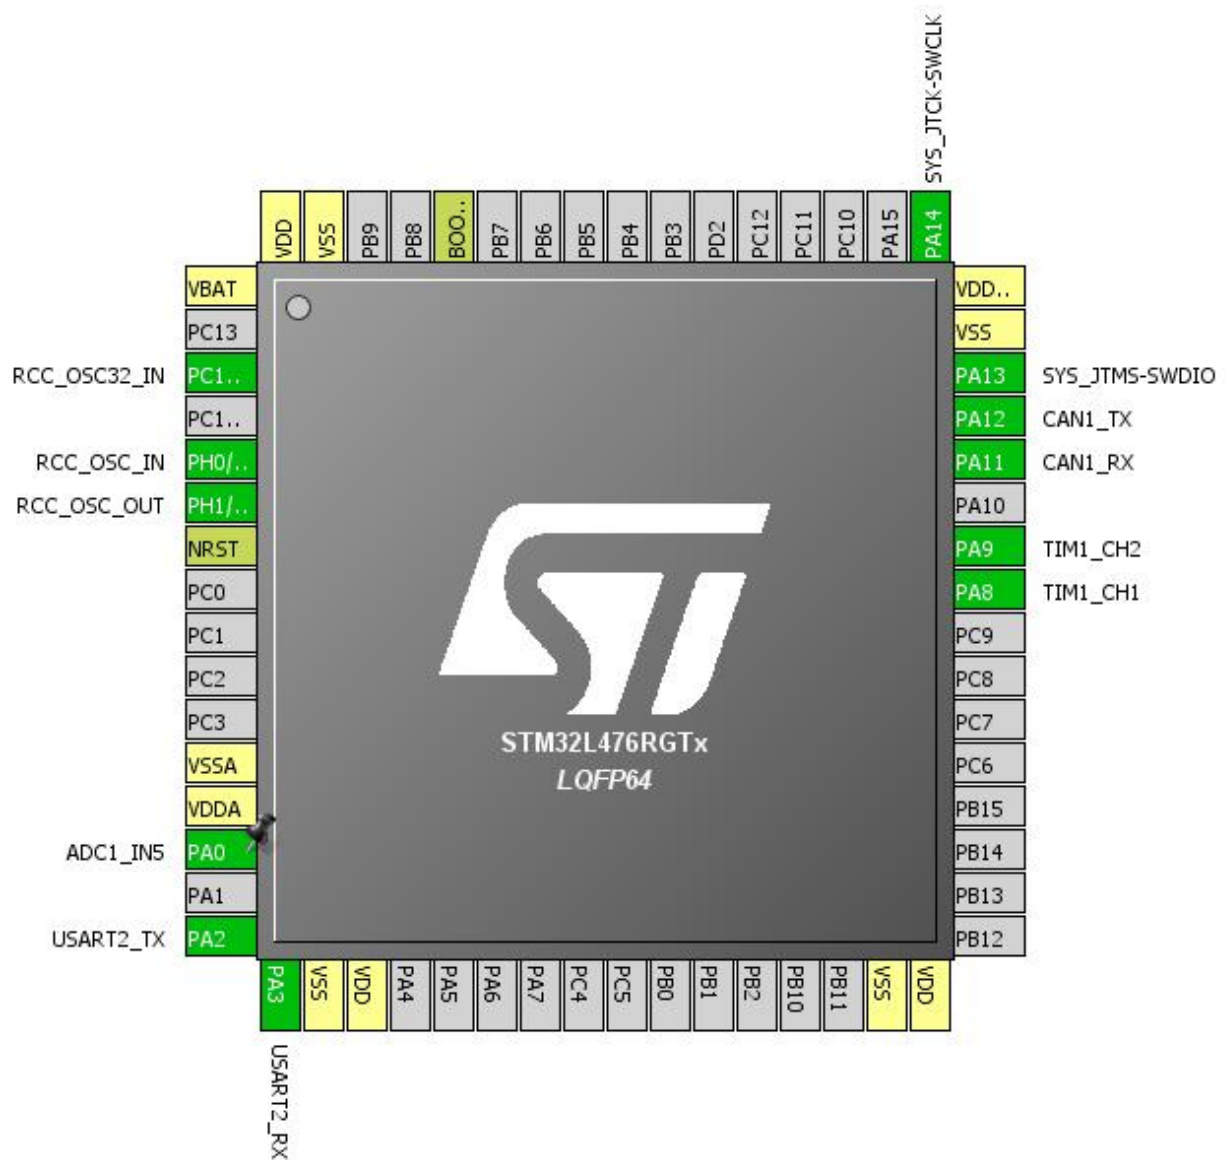

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
3	PC14/OSC32_IN	I/O	RCC_OSC32_IN	
5	PH0/OSC_IN	I/O	RCC_OSC_IN	
6	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
14	PA0	I/O	ADC1_IN5	
16	PA2	I/O	USART2_TX	
17	PA3	I/O	USART2_RX	
18	VSS	Power		
19	VDD	Power		
31	VSS	Power		
32	VDD	Power		
41	PA8	I/O	TIM1_CH1	
42	PA9	I/O	TIM1_CH2	
44	PA11	I/O	CAN1_RX	
45	PA12	I/O	CAN1_TX	
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDDUSB	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

4. Clock Tree Configuration

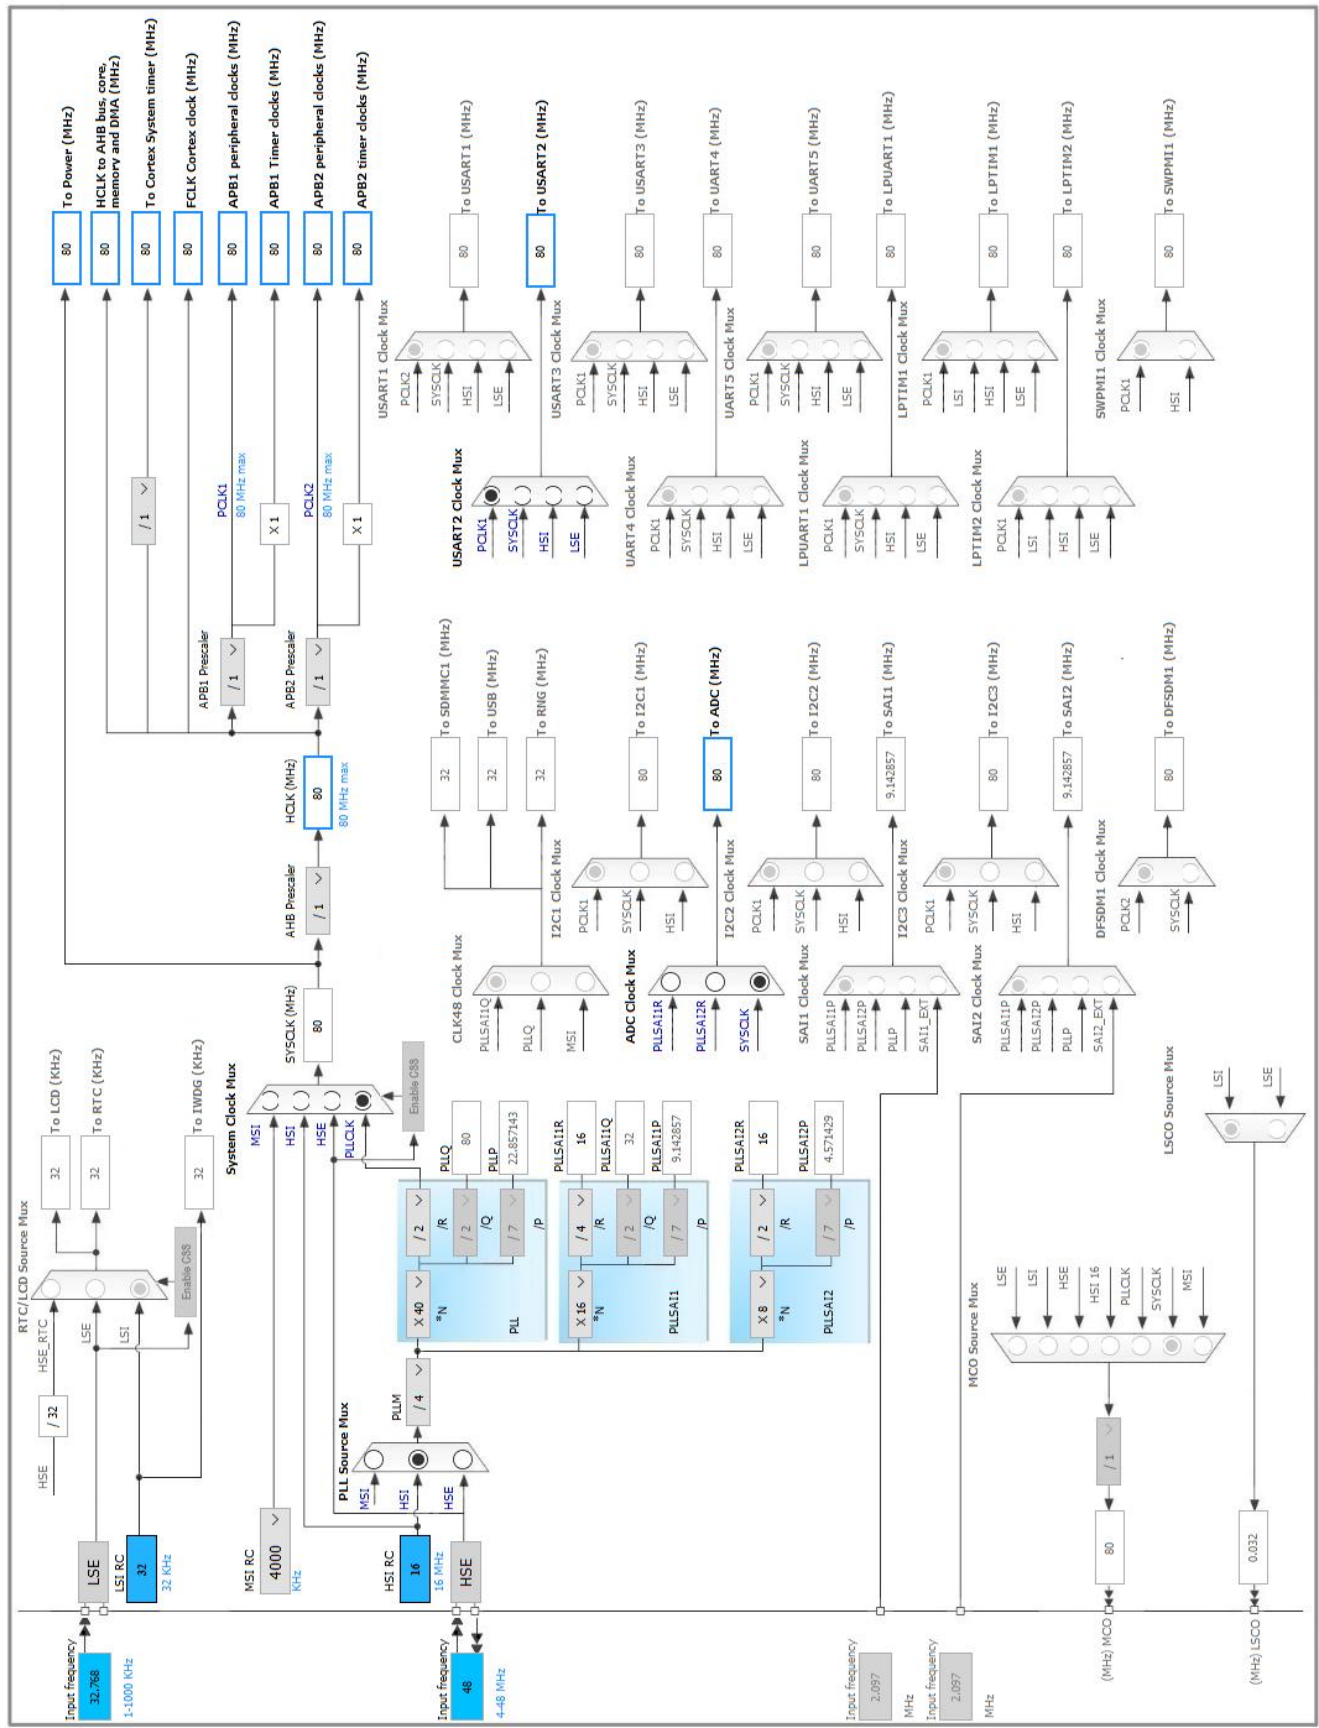

5. IPs and Middleware Configuration

5.1. ADC1

IN5: IN5 Single-ended

5.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode Independent mode

ADC_Settings:

Clock Prescaler Asynchronous clock mode divided by 1

Resolution ADC 12-bit resolution

Data Alignment Right alignment

Scan Conversion Mode Disabled

Continuous Conversion Mode Disabled

Discontinuous Conversion Mode Disabled

DMA Continuous Requests Disabled

End Of Conversion Selection End of single conversion

Overrun behaviour Overrun data preserved

Low Power Auto Wait Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions Enable

Enable Regular Oversampling Disable

Number Of Conversion 1

External Trigger Conversion Source Regular Conversion launched by software

External Trigger Conversion Edge None

Rank 1

Channel Channel 5

Sampling Time 2.5 Cycles

Offset Number No offset

ADC_Injected_ConversionMode:

Enable Injected Conversions Disable

Analog Watchdog 1:

Enable Analog WatchDog1 Mode false

Analog Watchdog 2:

Enable Analog WatchDog2 Mode false

Analog Watchdog 3:

Enable Analog WatchDog3 Mode false

5.2. CAN1

mode: Mode

5.2.1. Parameter Settings:

Bit Timings Parameters:

Prescaler (for Time Quantum)	10 *
Time Quantum	125.0 *
Time Quanta in Bit Segment 1	1 Time
Time Quanta in Bit Segment 2	1 Time
Time for one Bit	375 *
ReSynchronization Jump Width	1 Time

Basic Parameters:

Time Triggered Communication Mode	Disable
Automatic Bus-Off Management	Disable
Automatic Wake-Up Mode	Disable
No-Automatic Retransmission	Disable
Receive Fifo Locked Mode	Disable
Transmit Fifo Priority	Disable

Advanced Parameters:

Operating Mode	Normal
----------------	--------

5.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : BYPASS Clock Source

5.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled
Flash Latency(WS)	4 WS (5 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
MSI Auto Calibration	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000
Power Parameters:	
Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

5.4. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.5. TIM1

Clock Source : Internal Clock

Channel1: Input Capture direct mode

Channel2: Input Capture direct mode

5.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	8000 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535 *
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)
Trigger Event Selection TRGO2	Reset (UG bit from TIMx_EGR)

Input Capture Channel 1:

Polarity Selection	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	15 *

Input Capture Channel 2:

Polarity Selection	Rising Edge
IC Selection	Direct

Prescaler Division Ratio	No division
Input Filter (4 bits value)	15 *

5.6. USART2

Mode: Asynchronous

5.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	38400 *
Word Length	8 Bits (including Parity) *
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0	ADC1_IN5	Analog mode for ADC conversion	No pull-up and no pull-down	n/a	
CAN1	PA11	CAN1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA12	CAN1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
RCC	PC14/OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM1	PA8	TIM1_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA9	TIM1_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	Very High *	
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	Very High *	

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
ADC1 and ADC2 interrupts	true	0	0
TIM1 update interrupt and TIM16 global interrupt	true	0	0
TIM1 capture compare interrupt	true	0	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
CAN1 TX interrupt	unused		
CAN1 RX0 interrupt	unused		
CAN1 RX1 interrupt	unused		
CAN1 SCE interrupt	unused		
TIM1 break interrupt and TIM15 global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM17 global interrupt	unused		
USART2 global interrupt	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x6
MCU	STM32L476RGTx
Datasheet	025976_Rev4

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	throttle
Project Folder	C:\Users\jmc_t\Documents\Git\throttle\throttle
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_L4 V1.7.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No