


● Cast Aluminum Frame

● Fabric Diaphragm

● High Sensitivity

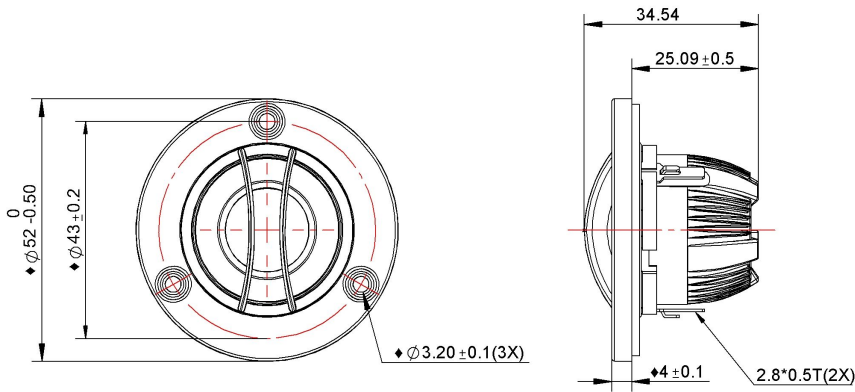


SPECIFICATIONS

Transducer Size	19	mm
Impedance	4	Ω
Frequency Range ¹	700 - 20000	Hz
Sensitivity ² (2.83V 1W @ 1m)	90.4 87.4	dB
Power Rating (IEC 268-5)	20	W
Voice Coil Size	19.3	mm
Air Gap Winding Height	H _{ag} H _{vc}	2 1.8 mm
Net Weight	0.06	kg

PARAMETERS ³

Eff. Piston Area	S _d	4.91	cm ²
DC Resistance	R _e	2.8	Ω
Minimum Impedance	Z _{min}	3.4	Ω
Inductance	L _e	0.014	mH
Resonance Frequency ⁴	F _s	770	Hz
Mechanical Q Factor	Q _{ms}	3.71	-
Electrical Q Factor	Q _{es}	1.57	-
Total Q Factor	Q _{ts}	1.1	-
Moving Mass	M _{ms}	0.197	g
Compliance	C _{ms}	220	μm/N
Equivalent Volume	V _{as}	0.007	L
Motor Force Factor	Bl	1.31	Tm
Motor Efficiency	β	0.611	(Bl) ² / R _e
Linear Excursion ⁵	X _{max}	0.7	mm

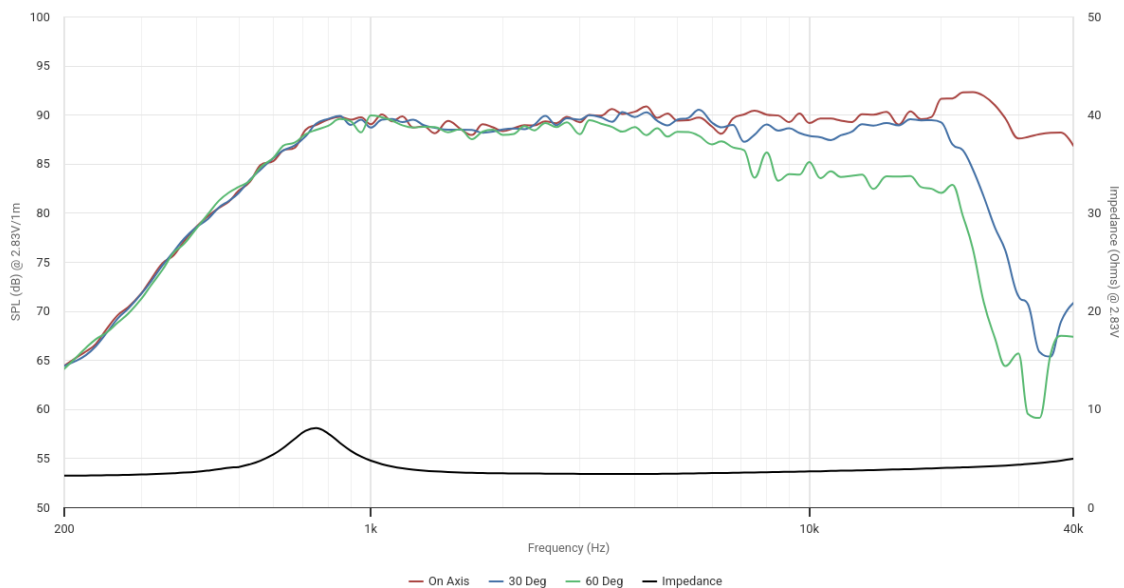

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tympany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. ¹ Specified by Engineering as linear working range of transducer. ² Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. ³ Measured in Free Air without preconditioning, therefore subject to some deviation. ⁴ Impedance and F_s value measured under different conditions. ⁵ Equal/Overhung: (H_{vc} - H_{ag})/2 + H_{ag}/3. Underhung: (H_{ag} - H_{vc})/2 + H_{vc}/3. ⁶ Mechanically limited excursion (e.g. bottoming, spider crash).