


- Pressed Steel Basket
- Ferrite Magnet
- Aluminum Shorting Ring
- Paper Diaphragm
- High Excursion

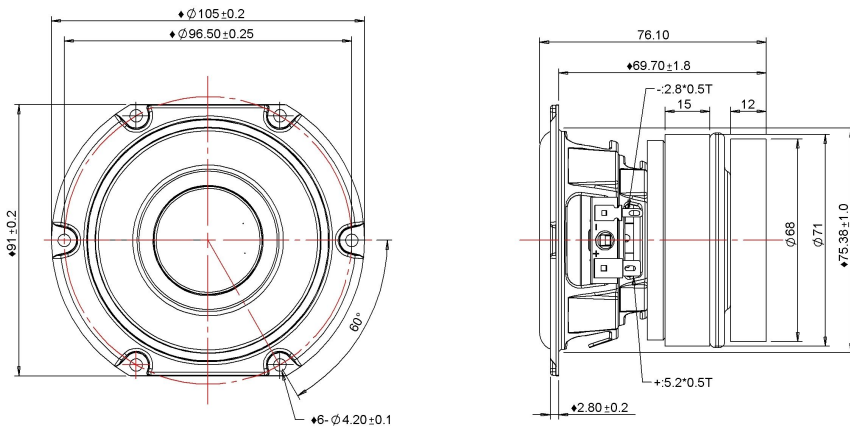


SPECIFICATIONS

Transducer Size	3.5	in
Impedance	4	Ω
Frequency Range ¹	200 - 2000	Hz
Sensitivity ² (2.83V 1W @ 1m)	86 83	dB
Power Rating (IEC 268-5)	30	W
Voice Coil Size	25.7	mm
Air Gap Winding Height	H _{ag} H _{vc}	6 15 mm
Net Weight	0.88	kg

PARAMETERS ³

Eff. Piston Area	S _d	32.2	cm ²
DC Resistance	R _e	3.2	Ω
Minimum Impedance	Z _{min}	3.7	Ω
Inductance	L _e	0.169	mH
Resonance Frequency ⁴	F _s	73	Hz
Mechanical Q Factor	Q _{ms}	5.41	-
Electrical Q Factor	Q _{es}	0.386	-
Total Q Factor	Q _{ts}	0.36	-
Moving Mass	M _{ms}	4.86	g
Compliance	C _{ms}	970	μm/N
Equivalent Volume	V _{as}	1.43	L
Motor Force Factor	Bl	4.3	Tm
Motor Efficiency	β	5.79	(Bl) ² / R _e
Linear Excursion ⁵	X _{max}	6.5	mm
Max Mechanical Excursion ⁶	X _{mech}	10.2	mm

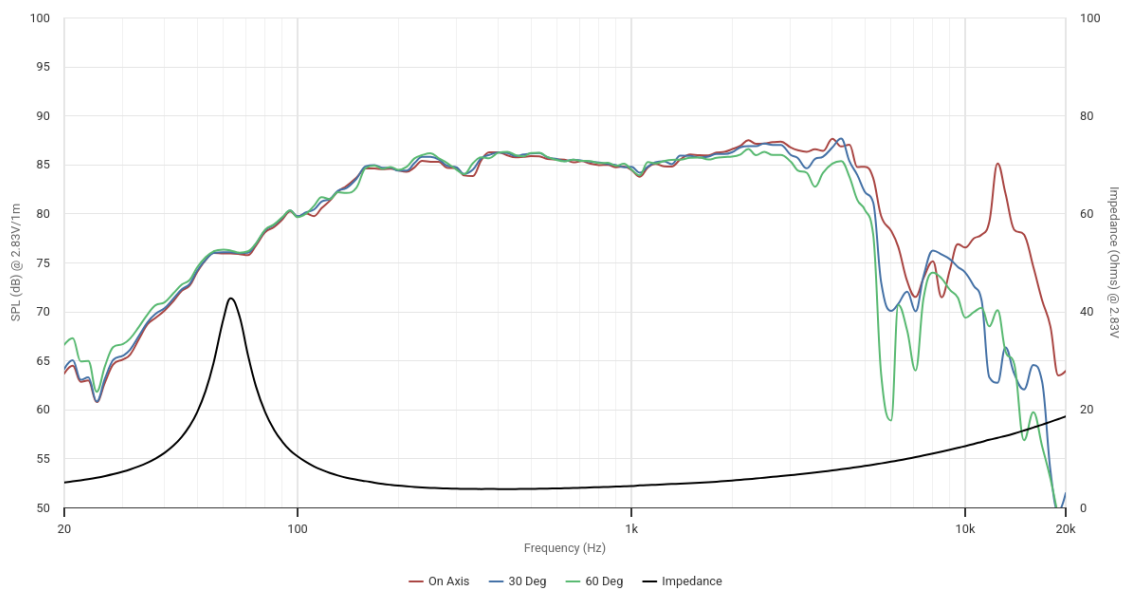

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tympany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. ¹ Specified by Engineering as linear working range of transducer. ² Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. ³ Measured in Free Air without preconditioning, therefore subject to some deviation. ⁴ Impedance and F_s value measured under different conditions. ⁵ Equal/Overhung: (H_{vc} - H_{ag})/2 + H_{ag}/3. Underhung: (H_{ag} - H_{vc})/2 + H_{vc}/3. ⁶ Mechanically limited excursion (e.g. bottoming, spider crash).