

## Research Article

# A Two-Level Communication Routing Algorithm Based on Vehicle Attribute Information for Vehicular Ad Hoc Network

Chenguang He <sup>1,2</sup>, Guanqiao Qu <sup>1</sup>, Liang Ye,<sup>1,3</sup> and Shouming Wei <sup>1,2</sup>

<sup>1</sup>School of Electronics and Information Engineering, Harbin Institute of Technology, Harbin 150000, China

<sup>2</sup>Key Laboratory of Police Wireless Digital Communication, Ministry of Public Security, China

<sup>3</sup>Science and Technology on Communication Networks Laboratory, Shijiazhuang 050000, China

Correspondence should be addressed to Chenguang He; [hechenguang@hit.edu.cn](mailto:hechenguang@hit.edu.cn)

Received 11 December 2020; Revised 11 January 2021; Accepted 5 February 2021; Published 25 February 2021

Academic Editor: Xin Liu

Copyright © 2021 Chenguang He et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Recently, the research on the vehicular ad hoc network (VANET) has been paid more attention by researchers with the quick development of the autonomous driving technology. In the VANET, vehicles can communicate with everything through the route established by routing algorithms. However, the topology of the VANET changes fast because the vehicles move fast. Also, as the number of vehicles increases, the probability of data collision and the transmission latency will also increase when communicating. Therefore, the VANET needs a stable, low-latency, and efficient route for vehicles to communicate with each other. However, the existing routing algorithms are either unable to aggregate data or are not suitable for the large-size VANET. In this paper, we consider the vehicle attribute information comprehensively and cluster the vehicles on the road by using the cluster algorithm we propose. We dynamically select the cluster heads at each moment according to their attribute information. We consider all kinds of nodes in the network and the vehicle nodes will communicate with each other through the cluster heads under the two-level communicating algorithm we propose. Compared with the existing cluster routing algorithm, the algorithm we propose is much more suitable for the large-size VANET because the cluster heads do not need a gateway to help them communicate. In the simulation part, we set some real street scenes in Simulation of Urban Mobility (SUMO) and the vehicles can move by the traffic rules like in the real world, which is more suitable for the VANET. After analysing the communication performance in Network Simulator version 2 (NS2), we can get a conclusion that the algorithm proposed is superior to the traditional routing algorithm. The route established by the algorithm we propose is much more stable and efficient. And the latency is also lower than the former.

## 1. Introduction

Recently, there is an unprecedented proliferation in the area of autonomous driving technologies, therefore, causing the great need of traffic for reliable and safe services [1]. Autonomous vehicles can exchange information gathered from local sensors and the cooperative communication mechanism permits the coordination of vehicles, improving traffic efficiency, and people comfort [2]. Therefore, vehicle communication is an important part of intelligent transportation systems and self-driving systems due to the fact that information can be exchanged between vehicles and everything. Vehicle-to-everything (V2X) includes vehicle-to-vehicle (V2V), vehicle-to-pedestrian (V2P), vehicle-to-infrastructure (V2I), and

vehicle-to-network (V2N) communications [3, 4]. In vehicular ad hoc network (VANET), a special kind of mobile ad hoc network (MANET), V2X communications can provide vehicles with the key information such as the map about the road, the situation about neighbor vehicles, and the information about traffic. Vehicles and drivers can decide an appropriate driving path. Besides, vehicles can download messages about weather from the internet and some information from other applications to enhance the comfort when driving. Therefore, V2X communication is a very promising technology in vehicular ad hoc network.

In VANET, it is important to develop a stable and efficient route to support V2X communications in any time. Services in VANET such as those about vehicle-safety-related

communication require V2X messages should be delivered reliably and fast [5]. Actually, besides information about safety, every information should be transmitted in time and correctly by using this route.

The routes used for communication are established by a routing protocol, such as AODV (Ad hoc On-demand Vector Routing), DSDV (Destination-Sequenced Distance Vector), and DSR (Dynamic Source Routing). The traditional routing protocols used in VANET can be classified into two kinds of protocols. One is proactive routing protocol, the other one is reactive routing protocols. However, no one kind of these traditional routing protocols is suitable for all VANET scenarios [6]. Also, because vehicles drive in a high speed, the topology in VANET can be very complicated soon [7]. Packets should be delivered in a low latency; otherwise, the information in packet would be useless. Moreover, because some packets may contain important safety information and some information may be about video and audio, the communication route should be stable so that vehicles can receive and decode information in packets successfully. Also, the spectrum resource is more and more precious in the 5th-generation mobile networks. Too many V2X communications at the same time and sensor networks in a small area on the road can cause the link congestion and consume too much energy, respectively, which breach the concept of green communication [8]. Like the communication in the industrial internet of things (IIOT), it is important to allocate the power and resources for the integrated network to decrease the system cost [9]. As a result, VANET needs an efficient communication mechanism to prevent network congestion in order to ensure the reliability of communication between vehicles and other devices. Also, communication with data aggregation can save bandwidth resources and support a large-scale vehicular network [10].

Therefore, V2X communications in VANET need a stable, low-latency, and efficient route to exchange information.

## 2. Related Work

Reference [11] introduces an edge computing solution to enhance the efficiency of content delivery. In the architecture proposed, the intelligence at the wireless edge (i.e., base stations and autonomous vehicles) can be made full use of for coordinated content delivery. An edge server is added at each BS to serve as an agent between cloud servers and vehicles for content delivery. Also, the resources at BSs are greater than those on vehicles. Not only can those be utilized to cache contents for all kinds of services usually required but also it can be used to compute the data from vehicles and servers. Therefore, when the density of vehicles grows, this architecture can reduce the burden on cellular network and decrease the transmission delay.

Moreover, [12] points out that vehicles may pass through several RSUs due to the high driving speed and the sending back of the computation data output needs to be transmitted through several MEC (mobile edge computing) servers in the traditional communication architecture used edge servers. However, in order to improve the transmission efficiency of the wireless backhauls, the task-input file cannot be trans-

ferred between the RSUs. Therefore, this paper introduces a method that data packets can be transferred to the MEC in the farther road in advance by using V2V and V2I communications to reduce the latency of the computation off load.

Reference [13] introduces an algorithm based on ant colony optimization (ACO) to avoid congestion accidents when communicating. ACO takes inspiration from the foraging behavior of ants. Ants can mark some favorable paths that could be followed by other members [14]. The iteration count value in each RSU in all the subsets will decrease by time and increase when a vehicle passes by. The shortest route will be found by comparing all RSUs' iteration counts and the larger the iteration count is, shorter the route is. Thus, after finding the shortest path in each subset, they are connected together between the source and destination to make sure the message can be sent efficiently.

The adaptive quality-of-service (QoS) based routing protocol proposed in [15] can choose the interactions which packets pass to select the route which can fulfill the best QoS by using an ACO-based algorithm. The ACO-based algorithm can explore the available candidate paths by using forward ants and choose the optimal route by using backward ants between two terminal intersections. The local QoS models for the local road segment can be used to estimate real-time pheromone, which can alleviate network congestions and have an efficient communication.

In order to avoid congestions and increase the efficiency when communicating, it is important to aggregate data in communications. Vehicles communicating by clusters is one of these methods. Reference [16] points out that the cluster heads (CHs) can perform cooperative spectrum sensing to get available spectrum, which can efficiently deduce the average total throughput and balance the whole system energy. Also, reference [17] implements major routing mechanisms in cluster-based routing protocol (CBRP). In each cluster, there is a cluster head (CH) serving as the relay node which is responsible for forwarding data packets between the source and destination. It maintains a less overlapping 1-hop cluster-head-based cluster structure. Each node can send out "Hello" message including its own information to its 1-hop neighbors. In order to have a greater cluster, the CH's neighboring CHs could be 2 or 3 hops away and the other nodes in the CH's route table would be cluster members (CMs). If the destination node is not in the route table of source node, the source node will send a route request (RREQ) to discover the route. The data from the source node and destination node will be transferred through the cluster head and cluster gateway (CGW). CGWs are the cooperative nodes that include their neighboring cluster information and know their 3-hop neighboring CHs. This kind of structure is more stable and efficient than traditional routing protocols and can increase the network traffic load or size.

The mobility prediction-based clustering (MPBC) scheme proposed in [18] is designed for ad hoc networks with high-speed nodes which can improve the scalability and stability. The node will periodically exchange "Hello" messages between its neighbors to estimate their relative speeds. In the start of clustering, the node with the smaller speed and the greater number of neighbors in the cluster will

be easier to become the CH. During the time when the network maintains the cluster, it will use mobility prediction strategies to extend the connection lifetime for each node and make the clusters more stable. When a CM is going to run out of the limited transmission range, it will choose the cluster that it may stay in for the longest time. When two CHs and their own clusters come into each other's coverage area, the CH with the smallest relative speed will become the new cluster head of these two clusters. This scheme has longer connection time and can increase the network stability and scalability.

In summary, V2X communications in VANET need to establish routes before communicating. The proactive routing protocols such as AODV only find the route to destination when the source needs to communicate. Although this can save the overhead of the network, the transmission delay is high. The reactive routing protocols such as DSDV will maintain all available routes in each node's routing table by exchanging messages periodically. Although, it is helpful to decrease the communication delay, the overhead of the network is higher. Due to the fact that the VANET has the characteristics of high data capacity, low-latency demand, and high nodes' speed, it is important to improve the structure of the network or the traditional routing protocols in order to provide VANET with a stable, low-latency, and efficient route for vehicles to communicate with each other.

However, although the network added with MEC servers may decrease the transmission delay when communicating, it does not solve the problem of congestions when lots of vehicles communicate with each other in a small area on the road. It is necessary to aggregate data or find a better route for the high number of vehicles in V2X communications to possibly avoid data congestion. Although the routing algorithms added with ACO may find a better route from source to destination, it has the characteristics of high complexity. Because the route in ACO needs much time to accumulate, it is not suitable to use in the VANET whose topology and surrounding scene change rapidly, which is not beneficial for routes to be formed. Finally, although CBRP aggregates the communication data and decreases the possibility of data congestion in a certain degree in V2X communications by clustering the vehicles on the road compared with the traditional routing protocols, the CH is selected only according to the mobility and the number of neighboring vehicles in the limited distance. It does not consider all nodes' characters comprehensively when selecting the CH. Also, the size of CBRP's cluster is 1 hop to 2 hop. It is designed for MANET and is not suitable for VANET for the size of cluster in VANET is much bigger than 2 hop. If the cluster size were to be as small as 2 hop, the overhead of the whole network will increase fast as the number of clusters and CHs grows. And the CGW will make the structure more complex.

In this paper, we propose a two-level cluster algorithm and a two-level communication routing algorithm. And the major contributions of this paper are as follows.

Firstly, the two-level cluster algorithm proposed considers the vehicle nodes' attribute information comprehensively. It clusters the vehicles on the road with a limited distance threshold and periodically selects the CHs according

to the vehicle attribute information such as the vehicle type, the number of neighboring vehicles, the total distance, and the speed at the same time. The first level of network is CH, and the second level is CM. Therefore, it can aggregate the communication data more efficiently and possibly avoid data congestion. Also, this algorithm takes the condition of each node into account.

The two-level communication routing algorithm is based on the cluster information from the two-level cluster algorithm. In order to communicate more efficiently, the algorithm does not have the CGW. The algorithm is based on AODV; thus, it could have a bigger size of cluster and a lower overhead which is different from CBRP and more suitable for VANET. After vehicles are clustered, the source vehicle node will communicate with the destination vehicle node through this algorithm.

The existing researches on VANET routing algorithms are mostly set on the background of nodes that can move randomly in the scene set, which does not conform to the truth that vehicles can only move in such particular lanes according to the traffic rules under the limited legal speed. This paper utilizes Simulation of Urban Mobility (SUMO) to simulate vehicles' movements on real road lanes in the real world under the traffic rules to truly show the advantages of the routing algorithm proposed.

The rest of this paper is listed below. Section 3 describes the two-level cluster algorithm. Section 4 introduces the two-level communication routing algorithm. Section 5 discusses the communication performance results of the routing algorithm proposed and traditional routing algorithm. Section 6 concludes this paper based on the results above.

### 3. Two-Level Cluster Algorithm

In this section, we introduce a cluster algorithm which can cluster the vehicles on the road and select the CHs based on vehicle attribute information. The cluster algorithm executed by vehicles can aggregate communication data with the help of CHs.

*3.1. The Vehicle Attribute Information.* In the exiting cluster algorithms, CHs are selected by only one kind of nodes' attribute information. Therefore, these algorithms are not suitable to be used in VANET due to the fact that the vehicle nodes in VANET have much more specific information which is different from the nodes in ordinary MANETs.

The vehicle attribute information we use in this algorithm is below.

The first one is the vehicle type  $C_i$  of the vehicle node  $i$ . The common three kinds of vehicle type on the road are the buses, the trucks, and the cars.  $C_i$  is an important attribute information that differentiates vehicles nodes in VANET from nodes in MANET. The CH serving as buses is the most stable because the buses' trace is the most stable among these three types of vehicles. The CH serving as cars can cause the least shadow fading when vehicles communicate because the cars' volume is the smallest, and the trucks' volume is the biggest among these three types of vehicles.

We consider the impact of each kind of vehicle on communication and set the value of  $C_i$  in Table 1.

The second one is the number of neighboring vehicles  $N_{i,t}$ . It is the number of neighboring vehicles in the limited distance threshold of the vehicle node  $i$  at time  $t$ . Once the distance between the source nodes and the destination nodes surpasses the limited distance threshold, the destination nodes cannot decode the packets from source nodes correctly. The limited distance threshold  $th$  is 300 m and the size of each cluster is no more than this threshold.

The third one is the total distance  $D_{i,t}$ . It is the total distance between vehicle node  $i$  and its each neighboring node  $j$ . Use the following formula (1) to obtain the total distance  $D_{i,t}$ .

$$D_{i,t} = \sum_{i=1}^n \sum_{j=1, j \neq i}^n \sqrt{(x_{i,t} - x_{j,t})^2 + (y_{i,t} - y_{j,t})^2}, \quad (1)$$

where  $n$  is the total number in the whole scene.  $x_{i,t}$  is the coordinate on the  $x$  axis of the vehicle node  $i$  at time  $t$ .  $x_{j,t}$  is the coordinate on the  $x$  axis of the vehicle node  $j$  at time  $t$ .  $y_{i,t}$  is the coordinate on the  $y$  axis of the vehicle node  $i$  at time  $t$ .  $y_{j,t}$  is the coordinate on the  $y$  axis of the vehicle node  $j$  at time  $t$ .

The fourth one is the speed  $M_{i,t}$  of a vehicle node. It is the distance movement per unit time of the vehicle node  $i$  at time  $t$  within the algorithm execution interval  $tim$ . Because the  $tim$  is short, the distance movement per unit time can be approximately regarded as the speed. Use the following formula (2) to obtain the speed  $M_{i,t}$  of a vehicle.

$$M_{i,t} = \frac{\sqrt{(x_{i,t} - x_{i,t-tim})^2 + (y_{i,t} - y_{i,t-tim})^2}}{tim}, \quad (2)$$

where  $x_{i,t-tim}$  is the coordinate on  $x$  axis of the vehicle node  $i$  at time  $t - tim$ .  $y_{i,t-tim}$  is the coordinate on the  $y$  axis of the vehicle node  $i$  at time  $t - tim$ .

These four kinds of attribute information in the algorithm proposed are important due to the fact that not only they represent the properties of the vehicles but also they measure the connectivity between different vehicles. It is beneficial for vehicles to communicate through clusters.

**3.2. Cluster the Vehicles on the Road.** In this part, the cluster algorithm will firstly judge the current time  $t$  is whether smaller the stop time. If the current time  $t$  is 0, it will increase the current time by  $tim$  after regarding the current coordinate as the initial coordinate. The algorithm is executed from node zero. During the execution of the cluster algorithm in each interval, it will firstly calculate the distance between a node and the other nodes in the scene. And the nodes will be clustered into a same cluster when the distance between nodes is less than the  $th$ . If a node has no neighbors within the  $th$ , there will be only one node in this cluster. The algorithm will keep clustering the nodes until all the nodes are clustered. After clustering the nodes, the algorithm will calculate the number of neighboring vehicle nodes  $N_{i,t}$ , the total

TABLE 1: The value of  $C_i$ .

Type	Value
Bus	1
Car	2
Truck	3

distance  $D_{i,t}$ , and the speed  $M_{i,t}$  of a vehicle node in each cluster at time  $t$ . After that, it will select the CHs and the CMs in each cluster at current time  $t$  and increase the current time by  $tim$ . The details about selecting CHs and CMs will be introduced in the next part. Finally, if the current time  $t + tim$  is smaller than the stop time, the algorithm will be executed again.

The details about this part are shown in Algorithm 1.

**3.3. Select CHs in Each Cluster.** This part is about how the cluster algorithm selects the CHs in each cluster at time  $t$  in part 3.2. It will firstly calculate the weighted count  $w_{i,t}$  of the vehicle node  $i$  at time  $t$  based on the four kinds of attribute information above. Use the following formula (3) to calculate the  $w_{i,t}$ .

$$w_{i,t} = \lambda_1 \times C_i + \lambda_2 \times M_{i,t} + \lambda_3 \times D_{i,t} - \lambda_4 \times N_{i,t}, \quad (3)$$

where  $\lambda_i$  is the weight of each attribute information.

From Table 1, we can infer that the CH served as the node with the smaller value of  $C_i$  may cause the less negative effect when vehicles communicate. Also, the lower the speed of a vehicle node is, the more stable the route established through this node is. Therefore, the CH served as the node with the smaller speed may be beneficial for communication. Moreover, the smaller the total distance  $D_{i,t}$  is, the closer the node is to the center of the cluster. Therefore, the route established through the CH served as the node with the smaller total distance may have the lower communication latency. Finally, the more the number of neighboring vehicles  $N_{i,t}$  is, the more neighboring nodes can be covered in the cluster. Therefore, the CH served as the node with the greater number of neighboring vehicles can aggregate more data packets when communicating and the route established through this node can be more efficient. In conclusion, the cluster algorithm will select the node with the smallest weighted count  $w_{i,t}$  to be the CH in each cluster at time  $t$ .

When selecting the CHs at time  $t$ , the algorithm will firstly check whether the sequence number of the node is greater than the total number of the nodes. If so, the algorithm will stop and the latest cluster information will be used in the two-level communication routing algorithm next.

If the sequence number of the node is smaller than the total number of the nodes, the cluster algorithm will check whether the node has been classified as a CM or CH in any cluster at time  $t$ . If the node has been a CM or CH at time  $t$ , the cluster algorithm will check the next node. Otherwise, the algorithm will check if the node has neighboring nodes or not at time  $t$ . If it has no neighboring nodes, it will be selected to be the CH of itself at time  $t$ . If it has neighboring



## Operation Flow

- 1: **Input:** the current time, the stop time, and the attribute information
- 2: **While** the current time is smaller than the stop time
- 3:     **if** the current time is 0
- 4:         regard the current coordinate as the initial coordinate
- 5:         increase the current time by  $\text{tim}$
- 6:         get the current coordinate of each node
- 7:         calculate the distance between a node and other nodes in the scene
- 8:         cluster the vehicles on the road
- 9:         calculate the number of neighboring vehicle nodes
- 10:         calculate the total distance among each node
- 11:         calculate the speed of a vehicle node in each cluster
- 12:         select the CHs in each cluster at time  $t$
- 13:         increase the current time by  $\text{tim}$
- 14: **End**

ALGORITHM 1: How to cluster the vehicles on the road.

## Operation Flow

- 1: **Input:** the weighted count  $w_{i,t}$
- 2: **While** the sequence number of the node is smaller than the total number
- 3:     **if** the node has not been a CM or CH in any cluster at time  $t$
- 4:         **if** the node has neighboring nodes which are connected to itself and are not in any cluster either at time  $t$
- 5:             compare the weighted count among these nodes in the cluster
- 6:             select the CH and the CMs in this cluster at time  $t$
- 7:         **else**
- 8:             select itself to be the CH
- 9:         **else**
- 10:             continue
- 11: **End**

ALGORITHM 2: How the cluster algorithm selects the CHs in each cluster.

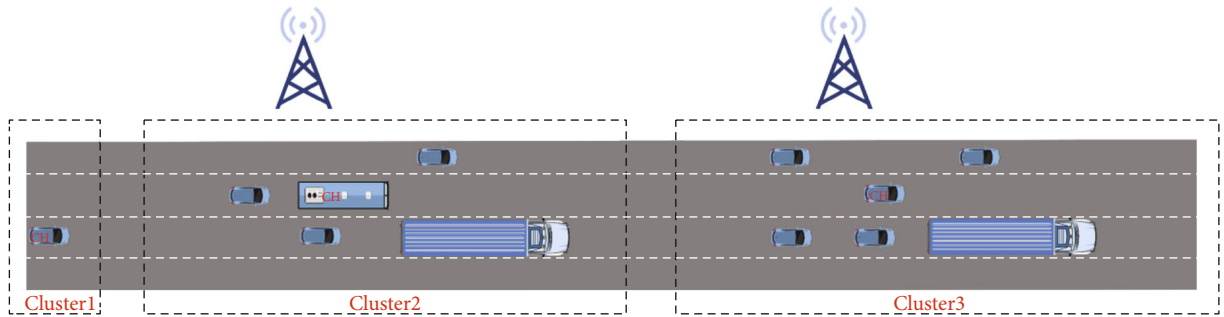


FIGURE 1: The model of the cluster algorithm.

nodes connected to itself and not in any cluster either, the algorithm will compare the weighted count  $w_{i,t}$  among these nodes in the cluster and select the node with the smallest weighted count to be the CH in this cluster and the other nodes will become the CMs in this cluster at time  $t$ . After that, the algorithm will check the next node and will be executed again.

After checking all nodes and selecting CHs in all clusters at time  $t$ , the algorithm will increase the current time by  $\text{tim}$ . If the current time  $t + \text{tim}$  is still smaller than the stop time, the algorithm in part 3.2 will be executed again.

The details in this part which is about selecting the CHs in each cluster at time  $t$  is shown in Algorithm 2.

The model in this section about cluster algorithm is shown in Figure 1.

In Figure 1, there are three kinds of vehicles, i.e., cars, buses, and trucks. Also, there are three clusters on the road at current time  $t$ . The cluster head is labelled by “CH” in each cluster while others are cluster members in each cluster.

#### 4. Two-Level Communication Routing Algorithm

In this section, we introduce a two-level communication routing algorithm based on the cluster information above.

```

Operation Flow
1: Input: cluster information
2: If the node index is the source of the RREQ it received
3:   discard this RREQ
4: else
5:   set up a reverse route or update the exiting reverse route
6:   read the cluster information from the cluster algorithm
7: End

```

ALGORITHM 3: The initial part of the two-level communication routing algorithm.

```

Operation Flow
1: Input: cluster information
2: If the  $ih \rightarrow saddr()$  is the source of the RREQ it received
3:   if the  $ih \rightarrow saddr()$  and the node index are in the same cluster
4:     node index sends RREP
5:     free this RREQ
6:   else
7:     free this RREQ
8: else
9:   if the destination node index is the  $CH[index]$  and the  $ih \rightarrow saddr()$  is the  $CH\_dst\_prehop[ih \rightarrow saddr()]$ 
10:    node index sends RREP
11:    free this RREQ
12:  else
13:    if  $ih \rightarrow saddr()$  is the  $CH[index]$ 
14:      node index sends RREP
15:      free this RREQ
16: End

```

ALGORITHM 4: How destination nodes send RREP.

The source node will communicate with the destination node with the help of the reliable CHs in the clusters.

The society is stepping into the era of big data, and the spectrum resources are facing serious shortage. Therefore, it is important to guarantee the spectrum access probability of each user in the network [19]. And the algorithm we propose in this section is beneficial for aggregating the data when communicating and saving the precious spectrum resource. Therefore, it can provide the communication with a stable and efficient route.

In the exiting routing algorithms such as AODV, DSR, and DSDV, all nodes are in one level; it can cause data packet congestion and even loss when the number of communicating vehicles increases. Also, these routing algorithms can also waste the communication resource because of the lack of data aggregation. Therefore, these routing algorithms need to effectively aggregate the data when communicating.

In the exiting cluster routing algorithms such as CBRP, the size of clusters is small and it is suitable for MANETs with small scene. It is not suitable for VANETs because the scene in VANETs may be much greater and much more complex. Also, the CGWs in CBRP may cause the waste of communication resource when communicating. Therefore, these cluster routing algorithms need to be improved in order to adapt to the scene in VANETs.

Therefore, we propose a two-level communication routing algorithm based on an existing routing algorithm and

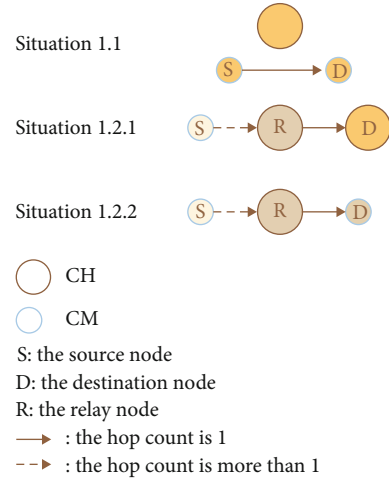


FIGURE 2: All kinds of situations about the destination node replying a RREP.

the cluster information obtained from the section above to fit in with the needs of the VANETs and the data aggregation.

**4.1. Route Discovery and Maintenance in AODV.** AODV is an on-demand route algorithm. The nodes do not need to maintain the route to destination all the time. The node will discover and maintain the route only when the source node

## Operation Flow

```

1: Input: cluster information
2: If the intermediate node index has the valid route to the destination
3:   node index sends RREP and GRAT_RREP
4:   free this RREQ
5: else
6:   if the intermediate node index is the CH
7:     if the  $ih \rightarrow saddr()$  is the source node
8:       if the source node is the CH
9:         broadcast this RREQ
10:        free this RREQ
11:     else
12:       if the source node and the node index are in the same cluster
13:         broadcast this RREQ
14:         free this RREQ
15:       else
16:         free this RREQ
17:     else
18:       if the  $ih \rightarrow saddr()$  is the CH of itself
19:         broadcast this RREQ
20:         free this RREQ
21:       else.
22:         free this RREQ
23:   else
24:     free this RREQ
25: End

```

ALGORITHM 5: How intermediate nodes broadcast RREQ.

communicates with the destination node. Although AODV uses a broadcast route discovery mechanism like DSR, AODV establishes the route table entries at intermediate nodes dynamically, which can effectively decrease the overhead in packets. Also, AODV utilizes the sequence numbers of packets like DSDV; however, each node in AODV maintains a monotonically increasing sequence number counter [20]. Therefore, the two-level communication routing algorithm proposed is based on AODV.

In AODV, the source node will only broadcast RREQ (route request) targeting the destination node when a source node needs a route to destination node. An intermediate node will firstly set up a reverse path to the source node and regard the previous hop of the RREQ as the next hop of this reverse path. If the intermediate node has a valid route to the destination node or the node is the destination node, it will send a RREP (route reply) to the source node via the reverse path. Otherwise, the intermediate node will rebroadcast the RREQ and the other nodes will discard the duplicate copies of the RREQ. A forward path will be successfully established to transfer data packets after the source node receives the RREP from the destination node [21].

When a route is broken, the nodes in this route will be notified with RRER (route error) packets which are intended to inform all sources using this failed route and the source nodes will discovery a new route if it is needed [22].

**4.2. The Two-Level Communication Routing Algorithm.** In this part, we will introduce the two-level communication

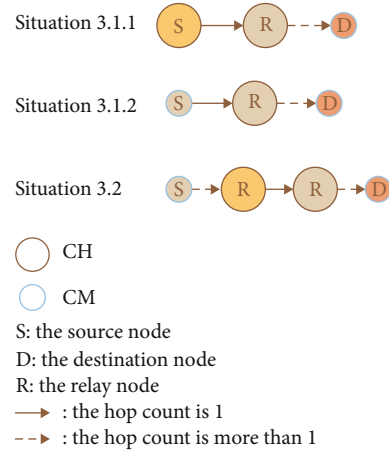


FIGURE 3: All kinds of situations about the intermediate node broadcasting the RREQ.

routing algorithm based on AODV and the cluster information.

In this algorithm, when the node index receives a RREQ, it will firstly drop this RREQ if it is the source of this RREQ. Otherwise, the node index will set up a valid reverse path  $rt_0$  or update the exiting  $rt_0$  to the source node. The previous hop of the RREQ is the next hop of this reverse path. In AODV, the node index is the node that is currently executing the algorithm.

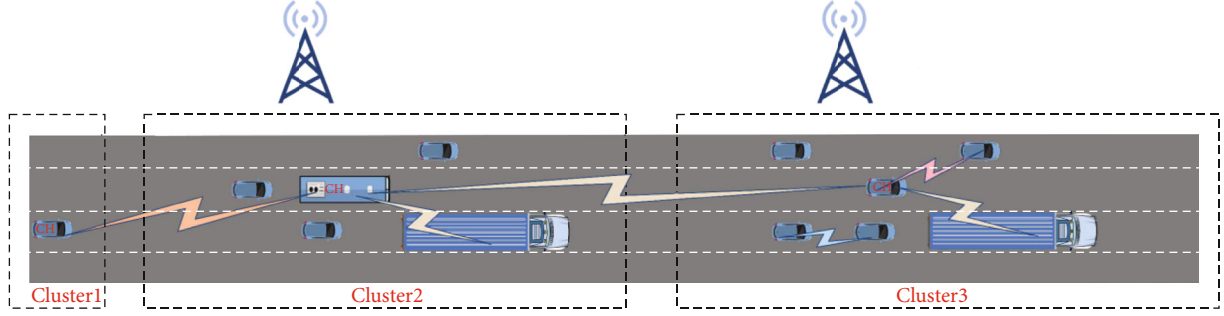


FIGURE 4: The model of the two-level communication routing algorithm.

After the establishment or the update of the  $rt_0$ , the algorithm will read the cluster information from the cluster algorithm in the above section. The algorithm will regard the  $i$ th CH as  $cluster[i][0]$  and regard the  $j$ th CM in the  $i$ th cluster as  $cluster[i][j]$ . Also, it will regard the CH of index as  $CH[index]$ .

The initial part of the two-level communication routing algorithm is shown in Algorithm 3.

After that, the node index will check whether itself is the destination of the RREQ. And it will regard the prehop of this RREQ as  $ih \rightarrow saddr()$ .

*Situation 1.* If the index is the destination of the RREQ, the algorithm will denote the CH of the pre-hop of this RREQ as  $CH\_dst\_prehop[ih \rightarrow saddr()]$ .

*Situation 1.1.* If now the  $ih \rightarrow saddr()$  is the source of this RREQ, which means that the hop count of the RREQ is only one. Therefore, in order to communicate effectively, the destination node index will send a RREP to the source node directly if they are in the same cluster. If they are not in the same cluster, the algorithm will free this RREQ.

*Situation 1.2.* If now the  $ih \rightarrow saddr()$  is not the source of this RREQ, it means that this RREQ is broadcasted by intermediate nodes. The destination node index will only send a RREP in the following situations.

*Situation 1.2.1.* The destination node index is the  $CH[index]$  and at the same time the  $ih \rightarrow saddr()$  is  $CH\_dst\_prehop[ih \rightarrow saddr()]$ . It means that the node index is the CH of index and the  $ih \rightarrow saddr()$  is the CH of  $ih \rightarrow saddr()$ . It ensures that only the CH can successfully receive and forward the RREQ.

*Situation 1.2.2.*  $ih \rightarrow saddr()$  is the  $CH[index]$ . It means that the  $ih \rightarrow saddr()$  is the CH of index. It ensures that the destination node will only receive the RREQ from its CH when the destination node is not a CH.

The operation flow about how the destination nodes send the RREP to establish the route is shown in Algorithm 4.

All kinds of situations about the destination node replying a RREP are shown in Figure 2. The nodes in the same cluster have the same color.

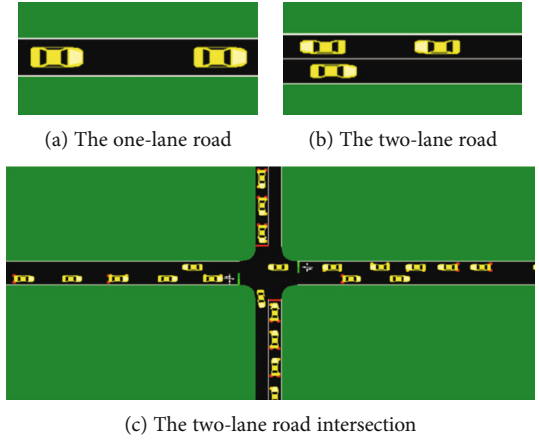


FIGURE 5: Three kinds of real street scenes.


TABLE 2: The parameters of the communication.

Parameter	Value
The number of vehicles	10, 20, 30, 40, 50, 60, 70
The type of vehicles	3
The maximum of the limited speed on lanes (m/s)	5, 7.5, 10, 12.5, 15, 17.5, 20
The size of the scene	1100 m $\times$ 1100 m
The stop time (s)	300.0
MAC protocol	802.11
Routing algorithm	AODV, the algorithm we propose
Transport layer protocol	TCP
The rate of communication nodes	0.5
Algorithm execution interval tim (s)	1
The limited distance threshold $th$ (m)	150


*Situation 2.* If the index is not the destination of the RREQ but the intermediate node has a valid route to the destination, the node index will send a RREP to the source node and also send a GRAT\_RREP to the destination node.

*Situation 3.* If the intermediate node index does not have a valid route to the destination, the algorithm will denote the source node of this RREQ as  $CH\_src[rq \rightarrow rq\_src]$  and it will



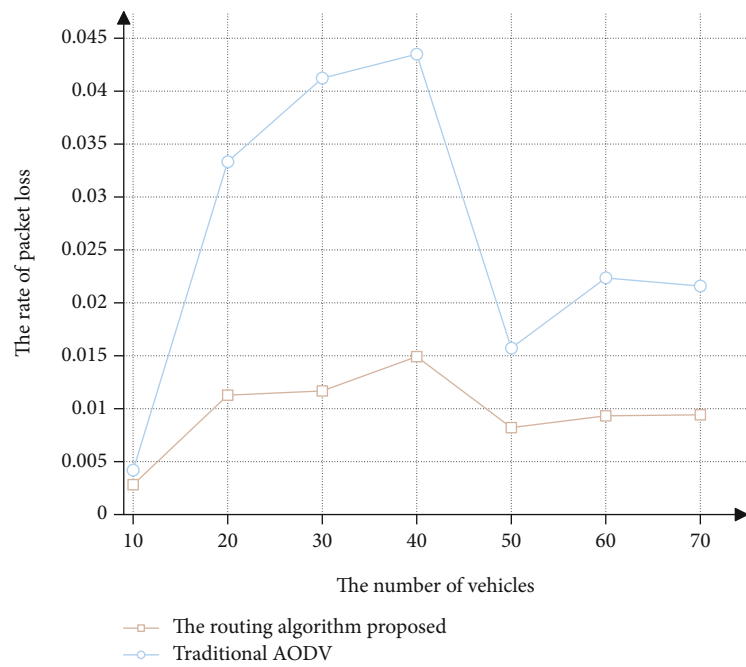

(a) The rate of packet loss

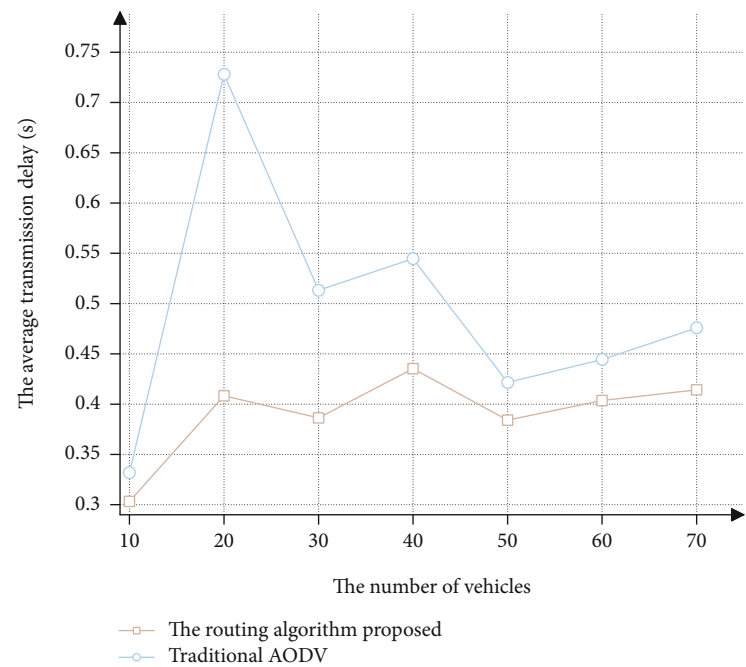

(b) The average transmission delay

FIGURE 6: Continued.

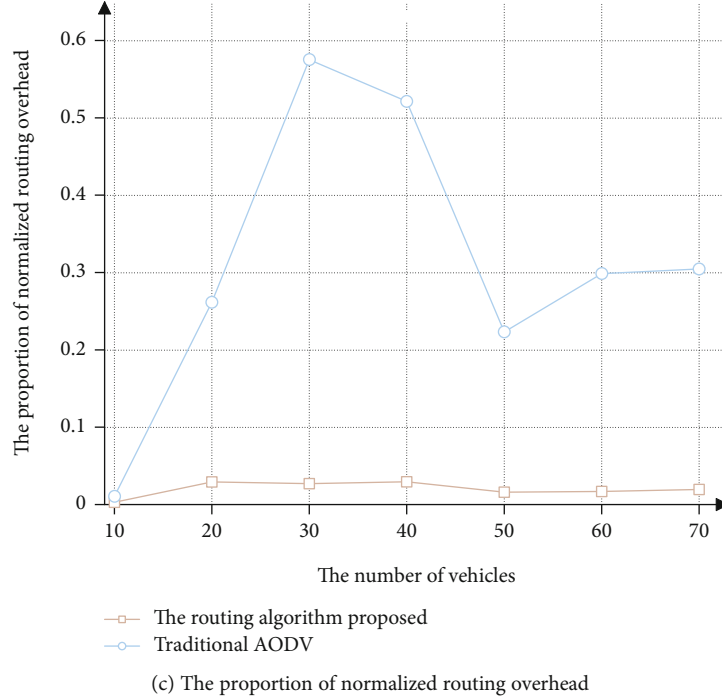


FIGURE 6: The communication performance of the two routing algorithms on the condition that the maximum of the limited speed is 15 m/s.

also regard the CH of  $ih \rightarrow saddr()$  as  $CH\_relay\_prehop[ih \rightarrow saddr()]$ . In Situation 3, only the intermediate node which is the CH can broadcast the RREQ successfully.

**Situation 3.1.** If the  $ih \rightarrow saddr()$  is the source node, it means that the intermediate node index is the first intermediate node. The intermediate node index will only broadcast this RREQ in the following situations. It ensures that the first intermediate node can only broadcast the RREQ from the source node which is the CH or the CM of the first intermediate node.

**Situation 3.1.1.** The source node is the CH of itself.

**Situation 3.1.2.** The source node and the intermediate nodes are in the same cluster.

**Situation 3.2.** If the  $ih \rightarrow saddr()$  is not the source node, it means that this RREQ reaches the intermediate node index through other intermediate nodes. The intermediate node index will only broadcast the RREQ it received when the  $ih \rightarrow saddr()$  is the CH, namely, the  $CH\_relay\_prehop[ih \rightarrow saddr()]$ . It ensures that only the intermediate node as the CH can broadcast the RREQ to find the route to the destination from the second intermediate node.

The operation flow about how the intermediate nodes broadcast the RREQ they revive is shown in Algorithm 5.

All kinds of situations about the intermediate node broadcasting the RREQ are shown in Figure 3. The nodes in the same cluster have the same color.

The two-level communication routing algorithm we propose considers all kinds of situations of the source nodes, the destination nodes, and the intermediate nodes.

The source node will communicate with the destination node through the CH on the route. The model of this algorithm is shown in Figure 4. The communication with the same color is the same.

## 5. Simulation Results


In this section, vehicles will communicate with each other through the two-level communication routing algorithm and the traditional AODV routing algorithm by the help of NS2 (Network Simulator version 2). And we choose some real street scenes to simulate the movement of vehicles in real world by using SUMO (Simulation of Urban Mobility). SUMO is an open-source traffic simulator. We compare the communication performance of the two-level communication routing algorithm proposed with that of the traditional routing algorithm in order to verify the reasonability and superiority of the algorithm proposed.

We choose three kinds of real street scenes, namely, the one-lane road, the two-lane road, and the two-lane intersection. The specific situation is shown in Figure 5.


The parameters of the communication are shown in Table 2.

Use the following formulas (4), (5), and (6) to calculate the rate of packet loss  $L$ , the average transmission delay  $T$ , and the proportion of normalized routing overhead  $O$ , respectively.

$$L = \frac{\text{The total number of packets received}}{\text{The total number of packets sent}}, \quad (4)$$

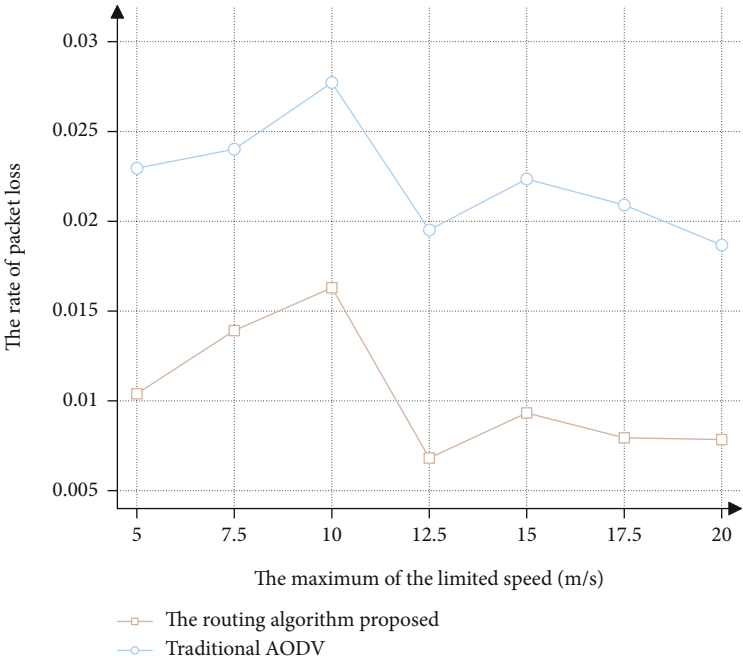

(a) The rate of packet loss

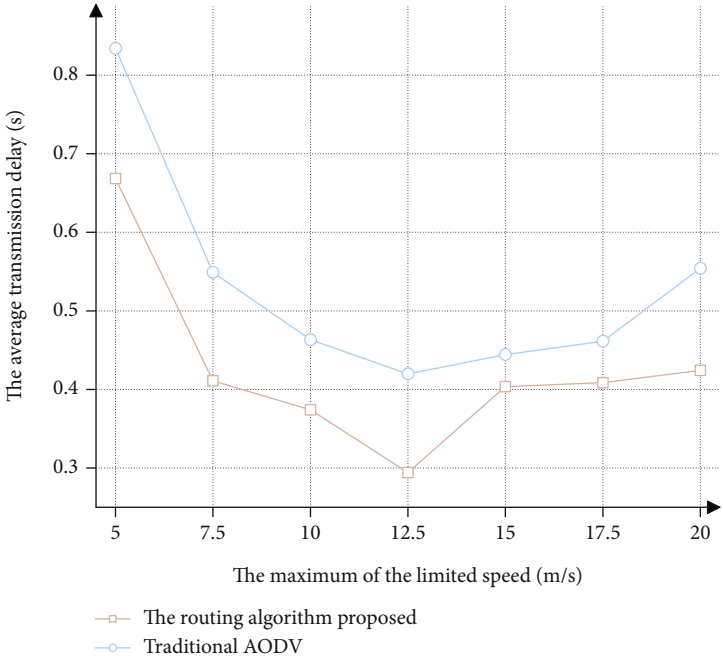

(b) The average transmission delay

FIGURE 7: Continued.

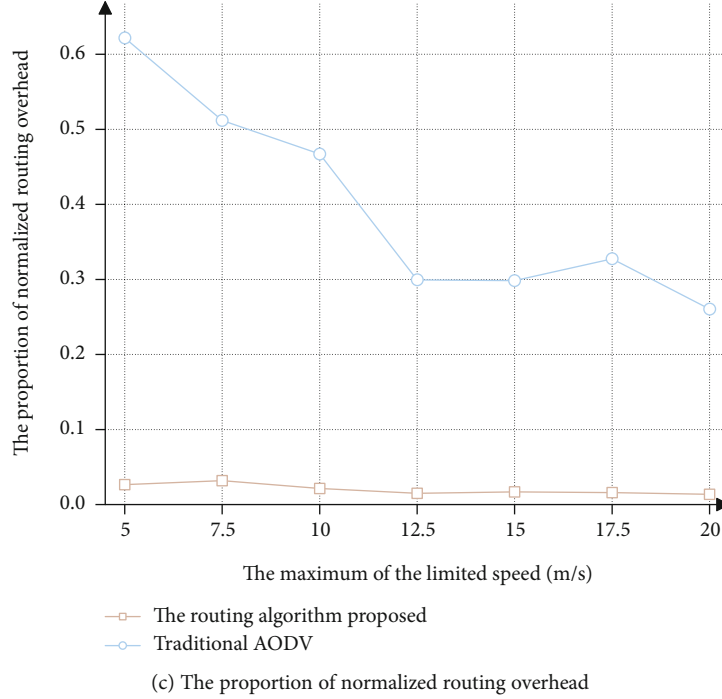


FIGURE 7: The communication performance of the two routing algorithms on the condition that the maximum of the number of vehicles is 60.

$$T = \frac{\text{The duration between the first and the last packet}}{\text{The total number of packets sent}}, \quad (5)$$

$$O = \frac{\text{The number of routing packets}}{\text{The total number of packets sent}}. \quad (6)$$

Figure 6 shows the communication performance of the two routing algorithms on the condition that the maximum of the limited speed is 15 m/s.

Figure 7 shows the communication performance of the two routing algorithms on the condition that the number of vehicles is 60.

In the real-world scenes, the distance among the vehicles is close like the distance in the real world. Also, the vehicles move according to traffic rules in the real world. Moreover, there will always be the same traffic jam or smoothness which is similar to the real world, as well as there will often be a large number of vehicles that are close communicating at the same time. Therefore, the real-world scenes we set are more suitable to simulate the communication in VANET than the random moving scenes used in other researches. Although, the data fluctuates slightly, it is conceivable because the curves have the same trend since the two algorithms use the same files when simulating.

From the curves above, the following conclusions can be drawn.

**5.1. The Rate of Packet Loss.** On the condition that the maximum of the limited speed on the lane is same, the rate of packet loss of the algorithm we propose is much more stable as the number of vehicles increases. And the rate is also smaller than the traditional AODV. The average value is reduced about 1.5%.

On the condition that the number of vehicles is the same, the rate of packet loss of the algorithm we propose is smaller than the traditional AODV. The average value is reduced about 1%.

Therefore, the route established by the two-level communication algorithm we propose is much more stable than the traditional routing algorithm.

**5.2. The Average Transmission Delay.** On the condition that the maximum of the limited speed on the lane is same, the average transmission delay is smaller than the traditional AODV.

On the condition that the number of vehicles is same, the average transmission delay is smaller than the traditional AODV.

The average value is both reduced about 100 ms in both conditions.

Therefore, the route established by the two-level communication algorithm we propose has a lower latency than the traditional routing algorithm.

**5.3. The Proportion of Normalized Routing Overhead.** Compared to traditional AODV, the proportion of normalized routing overhead of the two-level communication routing algorithm is much more stable and smaller on the both conditions. The average value is both reduced about 0.3 in the both conditions.

Therefore, the route established by the two-level communication algorithm we propose is much more efficient than the traditional routing algorithm.

Above all, the two-level communication algorithm is better than the traditional routing algorithm in real street scenes. This algorithm establishes a route which has a low rate of

packet loss and average transmission delay to communicate with low routing overhead and meets the need of a stable low-latency and efficient route for communication in VANET.

## 6. Conclusion

In this paper, we cluster the vehicles on the roads by comprehensively considering their most attribute information. We also carefully select the CH in each cluster every time.

The vehicles can communicate with each other by using the two-level communication routing algorithm proposed in VANET. We consider all kinds of nodes in the VANET. Therefore, the source nodes will successfully communicate with the destination nodes through the CHs. The algorithm proposed is based on the routing algorithm AODV and the cluster information. Not only can it aggregate the communication data and save more precious communication resources than traditional one-level algorithms but also it can be more suitable for the VANETs, which have a much bigger size than the MANETs, compared with the existing cluster routing algorithms.

Also, because the vehicles move by the traffic rules in the real world, the real street scenes we set in the simulation is more suitable than the random moving scenes in other researches on VANET communication. From the simulation results, we can get the conclusion that the rate of packet loss, the average transmission delay, and the proportion of normalized routing overhead are all superior to the traditional routing algorithm. The route established by the algorithm we propose is much more stable and much more efficient than the traditional routing algorithm. And it also has a lower latency. Therefore, the algorithm we propose meets the need of a stable low-latency and efficient route for communication in VANET.

## Data Availability

The data used to support the findings of this study are available from the corresponding author upon request.

## Conflicts of Interest

The authors declare that they have no conflicts of interest.

## Acknowledgments

This work was supported by the National Natural Science Foundation of China (41861134010), the National Key R&D Program of China (2018YFC0807101), and the Fund Project of the Key Laboratory of Communication Network Information Transmission and Distribution Technology (HHX20641X002).

## References

- [1] I. Yaqoob, L. U. Khan, S. M. A. Kazmi, M. Imran, N. Guizani, and C. S. Hong, "Autonomous driving cars in smart cities: recent advances, requirements, and challenges," *IEEE Network*, vol. 34, no. 1, pp. 174–181, 2020.
- [2] L. Hobert, A. Festag, I. Llatser, L. Altomare, F. Visintainer, and A. Kovacs, "Enhancements of V2X communication in support of cooperative autonomous driving," *IEEE Communications Magazine*, vol. 53, no. 12, pp. 64–70, 2015.
- [3] N. Cheng, F. Lyu, J. Chen et al., "Big data driven vehicular networks," *IEEE Network*, vol. 32, no. 6, pp. 160–167, 2018.
- [4] S. Chen, J. Hu, Y. Shi et al., "Vehicle-to-everything (v2x) services supported by LTE-based systems and 5G," *IEEE Communications Standards Magazine*, vol. 1, no. 2, pp. 70–76, 2017.
- [5] X. Ma, J. Zhang, X. Yin, and K. S. Trivedi, "Design and analysis of a robust broadcast scheme for VANET safety-related services," *IEEE Transactions on Vehicular Technology*, vol. 61, no. 1, pp. 46–61, 2012.
- [6] A. Gupta, R. Singh, D. Ather, and R. S. Shukla, "Comparison of various routing algorithms for VANETS," in *2016 International Conference System Modeling & Advancement in Research Trends (SMART)*, pp. 153–157, Moradabad, 2016.
- [7] E. Schoch, F. Kargl, M. Weber, and T. Leinmuller, "Communication patterns in VANETs," *IEEE Communications Magazine*, vol. 46, no. 11, pp. 119–125, 2008.
- [8] W. Lu, X. Xu, G. Huang et al., "Energy efficiency optimization in SWIPT enabled WSNs for smart agriculture," *IEEE Transactions on Industrial Informatics*, 2020.
- [9] X. Liu, X. Zhai, W. Lu, and C. Wu, "QoS-guarantee resource allocation for multibeam satellite industrial internet of things with NOMA," *IEEE Transactions on Industrial Informatics*, vol. 17, no. 3, pp. 2052–2061, 2019.
- [10] S. Dietzel, F. Kargl, G. Heijenk, and F. Schaub, "Modeling in-network aggregation in VANETs," *IEEE Communications Magazine*, vol. 49, no. 11, pp. 142–148, 2011.
- [11] Q. Yuan, H. Zhou, J. Li, Z. Liu, F. Yang, and X. S. Shen, "Toward efficient content delivery for automated driving services: an edge computing solution," *IEEE Network*, vol. 32, no. 1, pp. 80–86, 2018.
- [12] K. Zhang, Y. Mao, S. Leng, Y. He, and Y. ZHANG, "Mobile-edge computing for vehicular networks: a promising network paradigm with predictive off-loading," *IEEE Vehicular Technology Magazine*, vol. 12, no. 2, pp. 36–44, 2017.
- [13] J. Amudhavel, K. P. Kumar, C. Jayachandrameena, S. Jaiganesh, S. S. Kumar, and T. Vengattaraman, "An robust recursive ant colony optimization strategy in VANET for accident avoidance (RACO-VANET)," in *2015 International Conference on Circuits, Power and Computing Technologies [ICCPCT-2015]*, pp. 1–6, Nagercoil, 2015.
- [14] M. Dorigo, M. Birattari, and T. Stutzle, "Ant colony optimization," *IEEE Computational Intelligence Magazine*, vol. 1, no. 4, pp. 28–39, 2006.
- [15] G. Li, L. Boukhatem, and J. Wu, "Adaptive quality-of-service-based routing for vehicular ad hoc networks with ant colony optimization," *IEEE Transactions on Vehicular Technology*, vol. 66, no. 4, pp. 3249–3264, 2017.
- [16] X. Liu and X. Zhang, "NOMA-based resource allocation for cluster-based cognitive industrial internet of things," *IEEE Transactions on Industrial Informatics*, vol. 16, no. 8, pp. 5379–5388, 2020.
- [17] J. Y. Yu, P. H. J. Chong, and M. Zhang, "Performance of efficient CBRP in mobile ad hoc networks (MANETS)," in *2008 IEEE 68th vehicular technology conference*, pp. 1–7, Calgary, BC, 2008.
- [18] M. Ni, Z. Zhong, and D. Zhao, "MPBC: a mobility prediction-based clustering scheme for ad hoc networks," *IEEE*



*Transactions on Vehicular Technology*, vol. 60, no. 9, pp. 4549–4559, 2011.

- [19] X. Liu, C. Sun, M. Zhou, C. Wu, B. Peng, and P. Li, “Reinforcement learning-based multislot double-threshold spectrum sensing with Bayesian fusion for industrial big spectrum data,” *IEEE Transactions on Industrial Informatics*, 2020.
- [20] C. E. Perkins and E. M. Royer, “Ad-hoc on-demand distance vector routing,” *Proceedings WMCSA'99, Second IEEE Workshop on Mobile Computing Systems and Applications*, , pp. 90–100, IEEE, New Orleans, LA, USA, 1999.
- [21] M. K. Marina and S. R. Das, “On-demand multipath distance vector routing in ad hoc networks,” in *Proceedings Ninth International Conference on Network Protocols. ICNP 2001*, pp. 14–23, Riverside, CA, USA, 2001.
- [22] C. E. Perkins, E. M. Royer, S. R. Das, and M. K. Marina, “Performance comparison of two on-demand routing protocols for ad hoc networks,” *IEEE Personal Communications*, vol. 8, no. 1, pp. 16–28, 2001.