
Comparing actuator-bound handling and frequency retuning on yielding frames

seismic input (FEMA P695 far-field)

Yielding frame

saturating actuator
$|u| \le U_{max}$



Open Ohtori benchmark

evaluation flow


Controller: two independent design axes

design frequency	post-hoc clip	in-QP
ω_1	elastic + clip	elastic + in-QP
$\omega_1\sqrt{\alpha}$	softened + clip	softened + in-QP

actuator-constraint handling

Under the primary score

descriptive variance shares, pooled FEMA P695 set

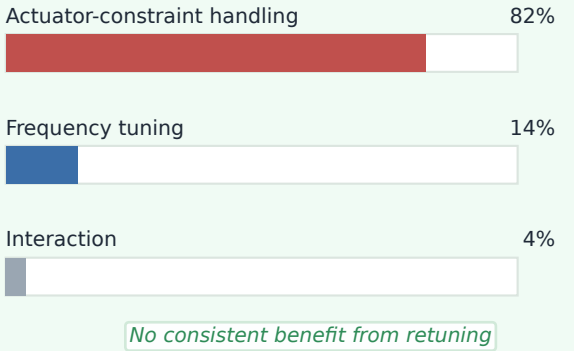

No consistent benefit from retuning