

Reliability-gated seismic demand screening

The model is admitted only inside an audited accepted-safe operating region.

Evidence boundary: truth is nonlinear simulation response; measured-building observations are supplementary diagnostics.

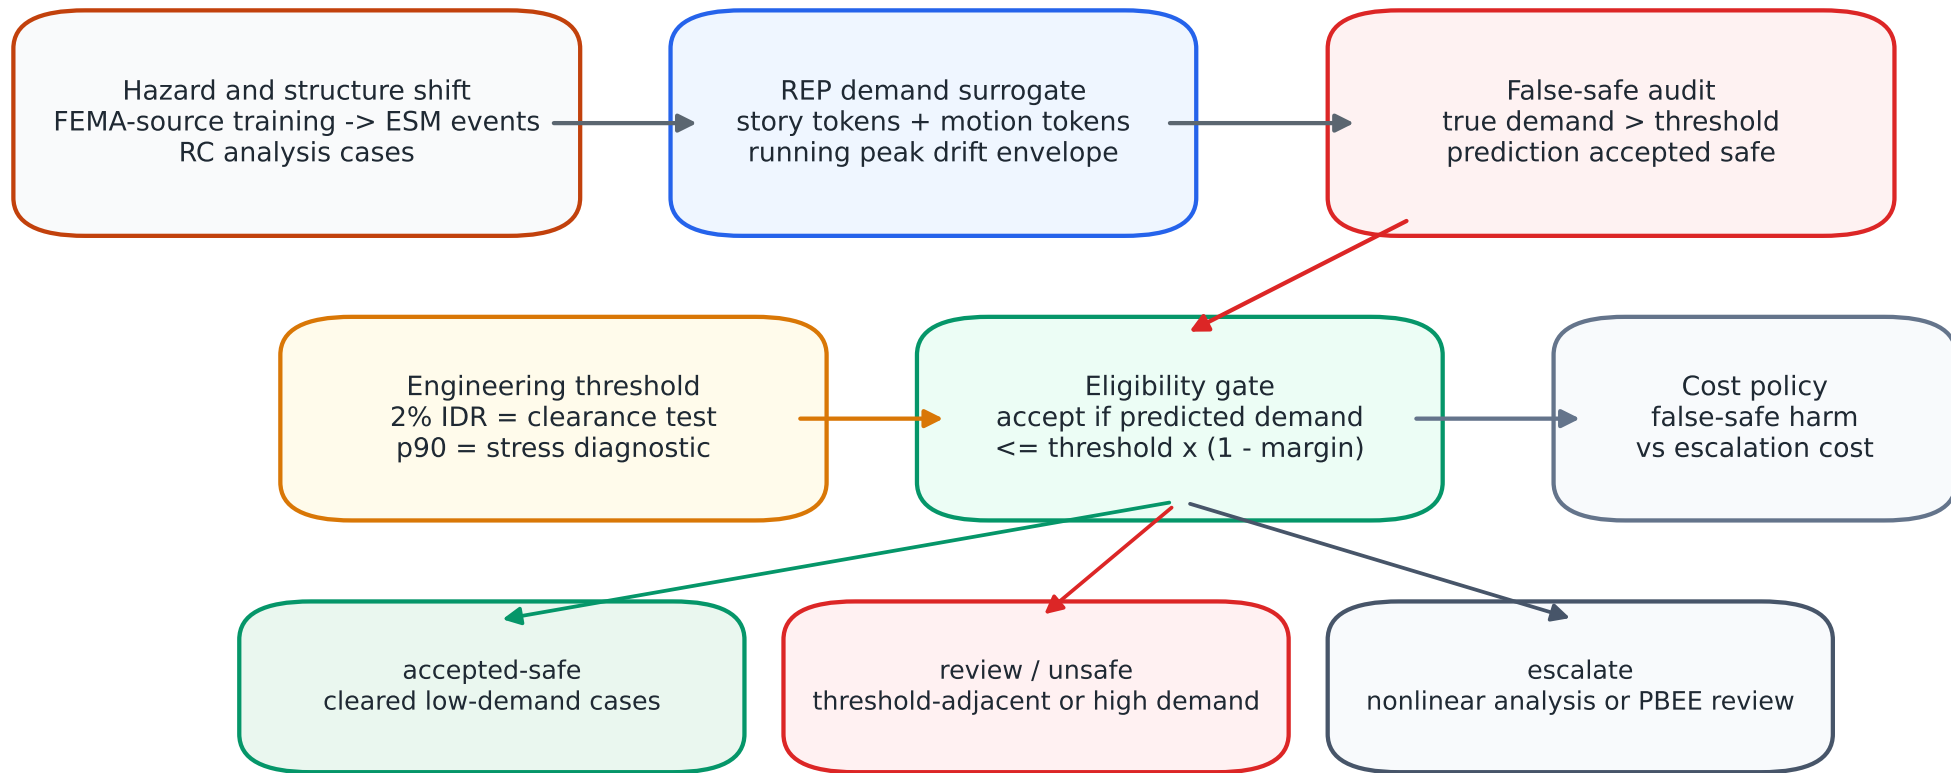


Figure 1. A selective decision architecture for seismic-demand screening under event-level source shift.