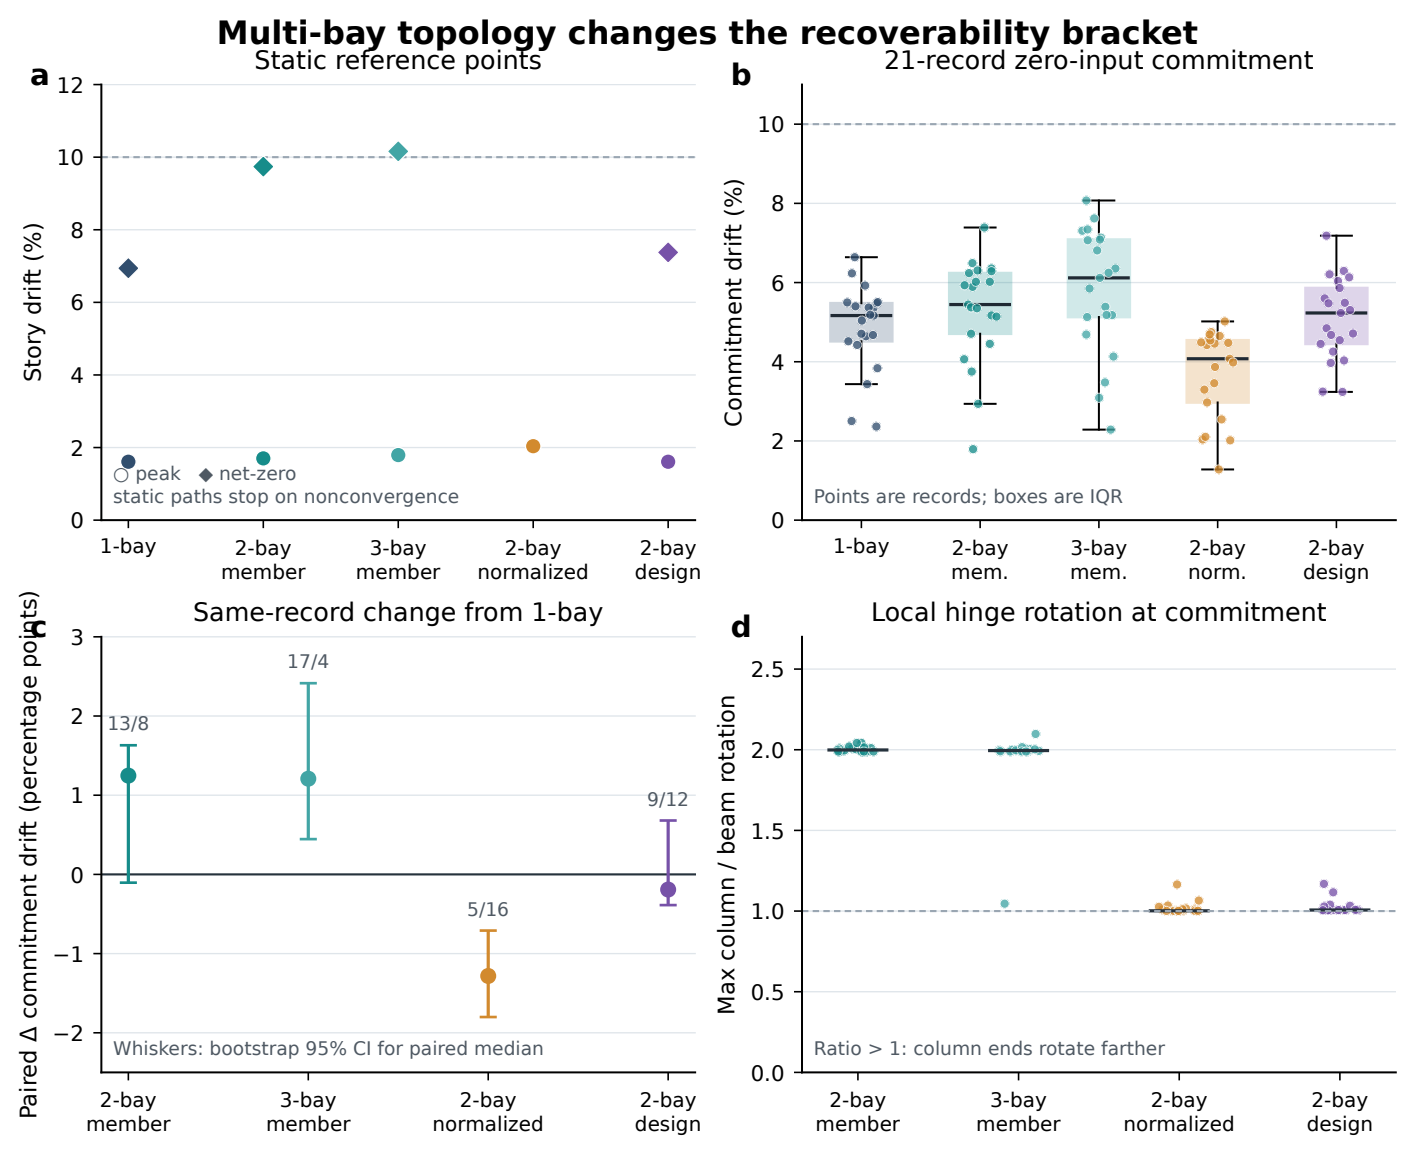

Multi-bay topology changes the recoverability bracket
a
Static reference points
Story drift (%)
peak
net-zero
static paths stop on nonconvergence
1-bay
2-bay member
3-bay member
2-bay normalized
2-bay design
b
21-record zero-input commitment
Commitment drift (%)
Points are records; boxes are IQR
1-bay
2-bay mem.
3-bay mem.
2-bay norm.
2-bay design
c
Same-record change from 1-bay
Paired Δ commitment drift (percentage points)
13/8
17/4
5/16
9/12
Whiskers: bootstrap 95% CI for paired median
2-bay member
3-bay member
2-bay normalized
2-bay design
d
Local hinge rotation at commitment
Max column / beam rotation
Ratio > 1: column ends rotate farther
2-bay member
3-bay member
2-bay normalized
2-bay design