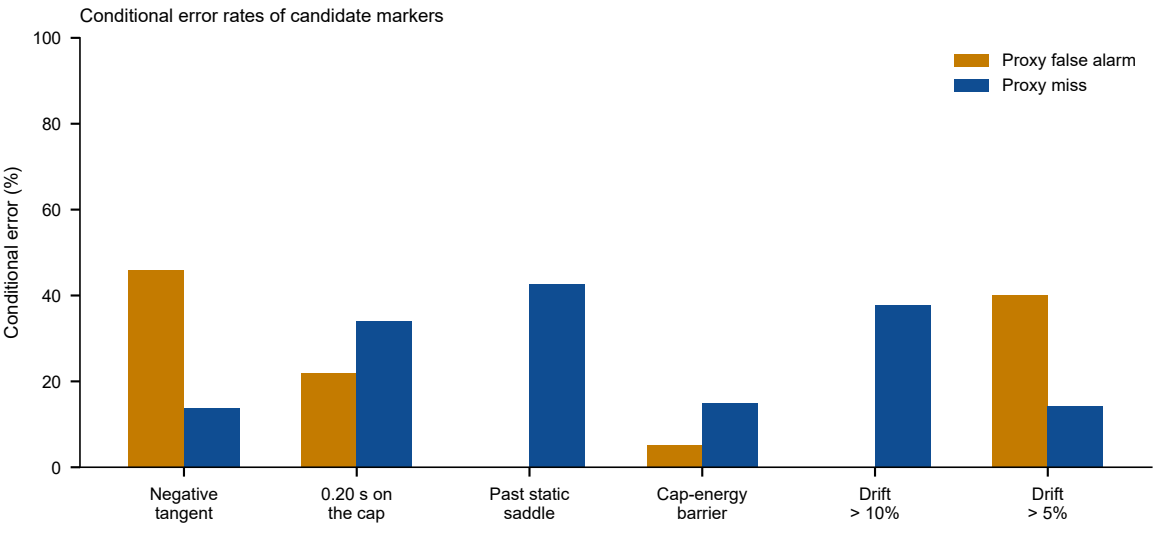
Conditional error rates of candidate markers
Conditional error (%)
100
80
60
40
20
0
Proxy false alarm
Proxy miss
Negative tangent
0.20 s on the cap
Past static saddle
Cap-energy barrier
Drift > 10%
Drift > 5%