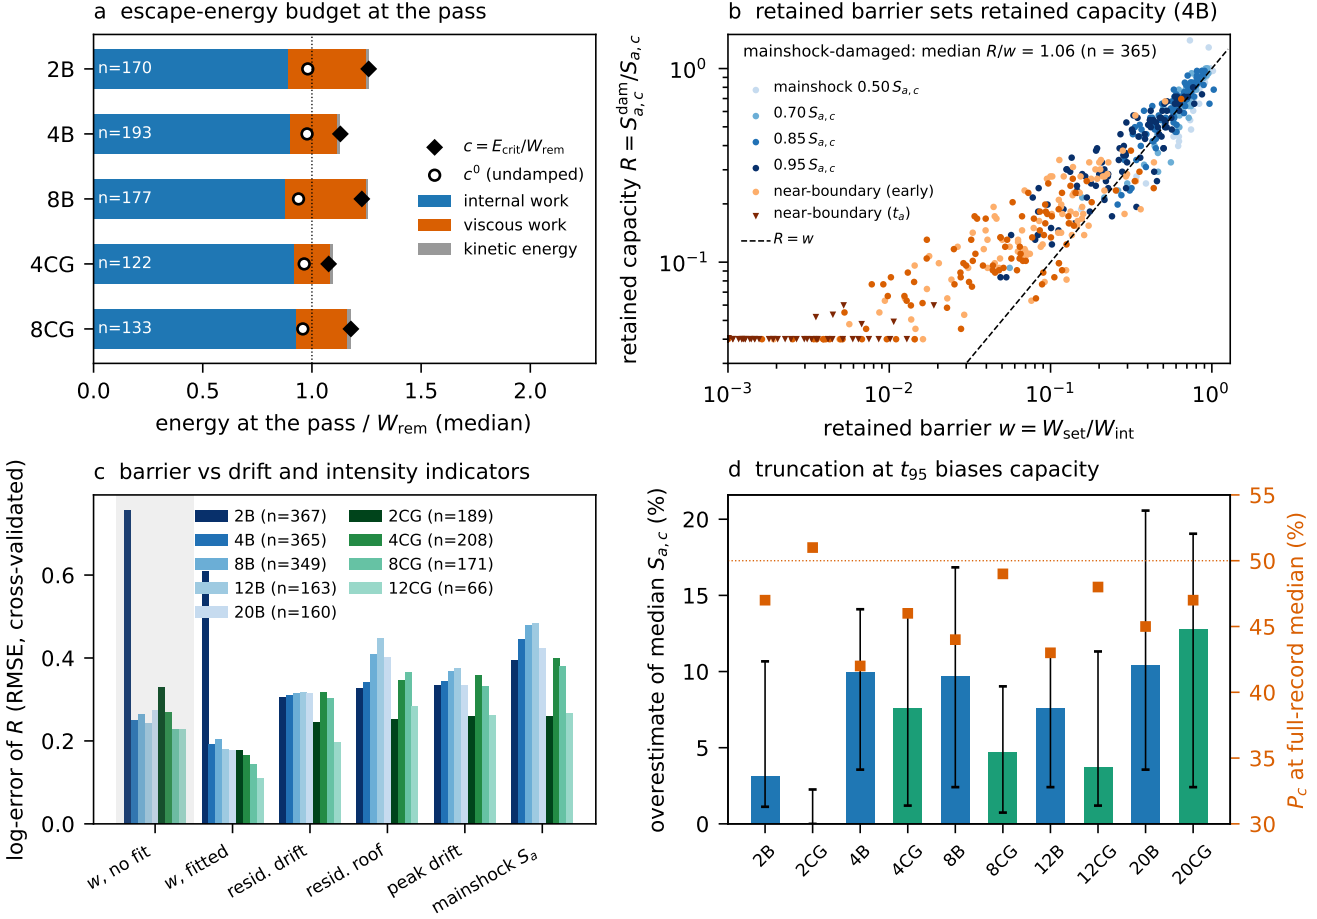
a escape-energy budget at the pass
2B
4B
8B
4CG
8CG
n=170
n=193
n=177
n=122
n=133
$c = E_{crit}/W_{rem}$
c^0 (undamped)
internal work
viscous work
kinetic energy
0.0
0.5
1.0
1.5
2.0
energy at the pass / W_{rem} (median)
b retained barrier sets retained capacity (4B)
mainshock-damaged: median R/w = 1.06 (n = 365)
mainshock 0.50 $S_{a,c}$
0.70 $S_{a,c}$
0.85 $S_{a,c}$
0.95 $S_{a,c}$
near-boundary (early)
near-boundary (t_a)
$R = w$
retained capacity $R = S_{a,c}^{dam}/S_{a,c}$
retained barrier $w = W_{set}/W_{int}$
c barrier vs drift and intensity indicators
2B (n=367)
4B (n=365)
8B (n=349)
12B (n=163)
20B (n=160)
2CG (n=189)
4CG (n=208)
8CG (n=171)
12CG (n=66)
log-error of R (RMSE, cross-validated)
w, no fit
w, fitted
resid. drift
resid. roof
peak drift
mainshock S_a
d truncation at t_{95} biases capacity
overestimate of median $S_{a,c}$ (%)
P_c at full-record median (%)
2B
2CG
4B
4CG
8B
8CG
12B
12CG
20B
20CG