iC60N circuit breakers (curve B, C, D)

CEI/EN 60947-2
BS/EN 60898-1

■ Disbo iC60N circuit breakers are multi-standard circuit breakers which combine the following functions:
□ circuit protection against short-circuit currents,
□ circuit protection against overload currents,
□ suitable for industrial isolation according to IEC/EN 60947-2, standard.
□ fault tripping indication by a red mechanical indicator in circuit breaker front face.

PB111066-40



PB111070-40




Alternating current (AC) 50/60 Hz						
Breaking capacity (Icu) according to IEC/EN 60947-2						**Service breaking capacity (Ics)**
		Voltage (Ue)				
Ph/Ph (2P, 3P, 4P)		**12 to 133 V**	**220 to 240 V**	**380 to 415 V**	**440 V**	
Ph/N (1P, 1P+N)		**12 to 60 V**	**100 to 133 V**	**220 to 240 V**	**-**	
Rating (In)	0.5 to 4 A	50 kA	50 kA	50 kA	25 kA	100 % of Icu
	6 to 63 A	36 kA	20 kA	10 kA	6 kA	75 % of Icu
Breaking capacity (Icn) according to IEC/EN 60898-1						
		Voltage (Ue)				
Ph/Ph		**400 V**				
Ph/N		**230 V**				
Rating (In)	0.5 to 63 A	6000 A				


Direct current (DC)						
Breaking capacity (Icu) according to IEC/EN 60947-2						**Service breaking capacity (Ics)**
		Voltage (Ue)				
Between +/-		**12 to 48 V**	**72 V**	**100 to 133 V**	**220 to 250 V**	
Number of poles		**1P**		**2P (in series)**	**3P (in series)**	**4P (in series)**
Rating (In)	1 to 63 A	15 kA	6 kA	6 kA	15 kA	6 kA	100 % of Icu

Catalogue numbers



Disbo iC60N circuit breaker

Type	**1P**			**2P**		
	E45092 			E45094 		
Auxiliaries	**Module CA907022**			**Module CA907022**		
Calibre (In)	**Curve**			**Curve**		
	B	**C**	**D**	**B**	**C**	**D**
0.5 A	**A9F43170**	**A9F44170**	**A9F45170**	**A9F43270**	**A9F44270**	**A9F45270**
1 A	**A9F43101**	**A9F44101**	**A9F45101**	**A9F43201**	**A9F44201**	**A9F45201**
2 A	**A9F43102**	**A9F44102**	**A9F45102**	**A9F43202**	**A9F44202**	**A9F45202**
3 A	**A9F43103**	**A9F44103**	**A9F45103**	**A9F43203**	**A9F44203**	**A9F45203**
4 A	**A9F43104**	**A9F44104**	**A9F45104**	**A9F43204**	**A9F44204**	**A9F45204**
6 A	**A9F43106**	**A9F44106**	**A9F45106**	**A9F43206**	**A9F44206**	**A9F45206**
10 A	**A9F43110**	**A9F44110**	**A9F45110**	**A9F43210**	**A9F44210**	**A9F45210**
16 A	**A9F43116**	**A9F44116**	**A9F45116**	**A9F43216**	**A9F44216**	**A9F45216**
20 A	**A9F43120**	**A9F44120**	**A9F45120**	**A9F43220**	**A9F44220**	**A9F45220**
25 A	**A9F43125**	**A9F44125**	**A9F45125**	**A9F43225**	**A9F44225**	**A9F45225**
32 A	**A9F43132**	**A9F44132**	**A9F45132**	**A9F43232**	**A9F44232**	**A9F45232**
40 A	**A9F43140**	**A9F44140**	**A9F45140**	**A9F43240**	**A9F44240**	**A9F45240**
50 A	**A9F43150**	**A9F44150**	**A9F45150**	**A9F43250**	**A9F44250**	**A9F45250**
63 A	**A9F43163**	**A9F44163**	**A9F45163**	**A9F43263**	**A9F44263**	**A9F45263**
Width in 9-mm modules	2			4		
Accessories	**Module CA907021**			**Module CA907021**		

iC60N circuit breakers (curve B, C, D) (cont.)

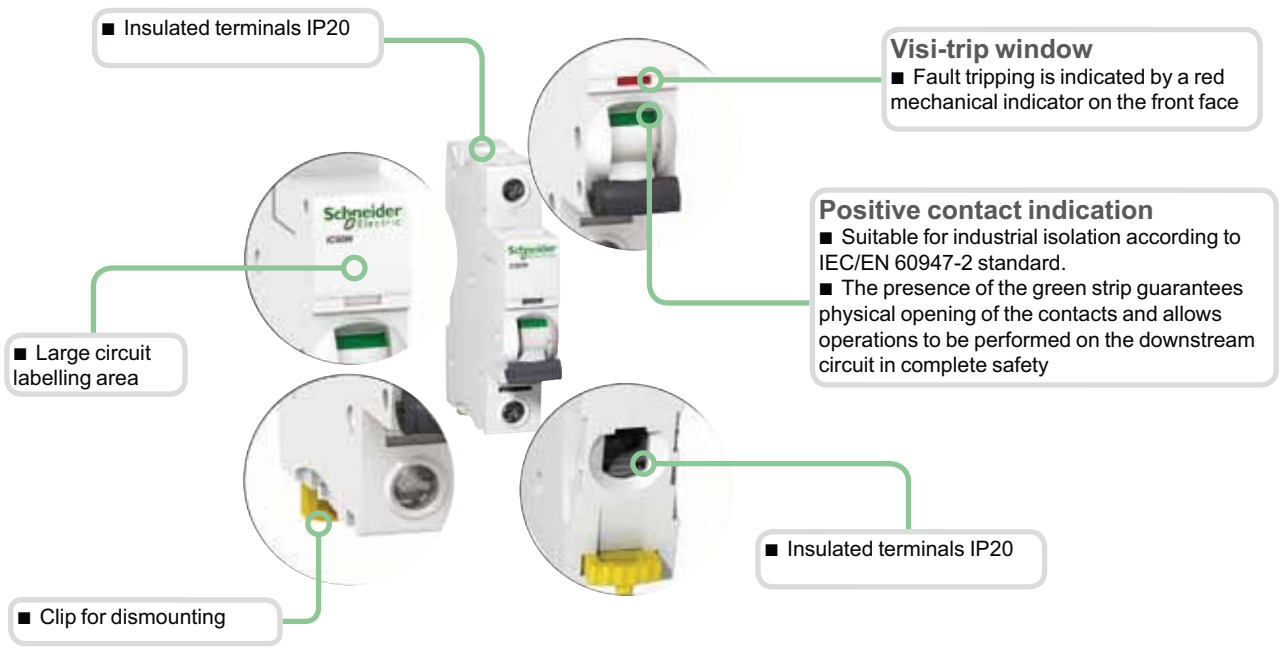


■ Increased product service life thanks to:
□ overvoltage resistance by high level of industrial performances conception (pollution degree, rated impulse withstand voltage and insulation voltage),
□ high performance limitation (see limitation curves),
□ fast closing independent of the speed of actuation of the toggle.
■ Remote indication, open/closed/tripped, by optional auxiliary contacts.
■ Top or bottom electrical feeding.


	3P			4P		
						
	Module CA907022			**Module CA907022**		
	Curve			**Curve**		
	B	**C**	**D**	**B**	**C**	**D**
	A9F43370	**A9F44370**	**A9F45370**	**A9F43470**	**A9F44470**	**A9F45470**
	A9F43301	**A9F44301**	**A9F45301**	**A9F43401**	**A9F44401**	**A9F45401**
	A9F43302	**A9F44302**	**A9F45302**	**A9F43402**	**A9F44402**	**A9F45402**
	A9F43303	**A9F44303**	**A9F45303**	**A9F43403**	**A9F44403**	**A9F45403**
	A9F43304	**A9F44304**	**A9F45304**	**A9F43404**	**A9F44404**	**A9F45404**
	A9F43306	**A9F44306**	**A9F45306**	**A9F43406**	**A9F44406**	**A9F45406**
	A9F43310	**A9F44310**	**A9F45310**	**A9F43410**	**A9F44410**	**A9F45410**
	A9F43216	**A9F44316**	**A9F45316**	**A9F43416**	**A9F44416**	**A9F45416**
	A9F43220	**A9F44320**	**A9F45320**	**A9F43420**	**A9F44420**	**A9F45420**
	A9F43225	**A9F44325**	**A9F45325**	**A9F43425**	**A9F44425**	**A9F45425**
	A9F43232	**A9F44332**	**A9F45332**	**A9F43432**	**A9F44432**	**A9F45432**
	A9F43240	**A9F44340**	**A9F45340**	**A9F43440**	**A9F44440**	**A9F45440**
	A9F43250	**A9F44350**	**A9F45350**	**A9F43450**	**A9F44450**	**A9F45450**
	A9F43263	**A9F44363**	**A9F45363**	**A9F43463**	**A9F44463**	**A9F45463**
	6			8		
	Module CA907021			**Module CA907021**		

iC60N circuit breakers (curve B, C, D) (cont.)


Connection




Rating	Tightening torque	Without accessory: Copper cables – Rigid	Without accessory: Copper cables – Flexible or ferrule	With accessories: 50 mm² Al terminal	With accessories: Screw-on connection for ring terminal	With accessories: Multi-cables terminal – Rigid cables	With accessories: Multi-cables terminal – Flexible cables
		DB122945	DB122946	DB122935	DB118789	DB118787	
0.5 to 25 A	2 N.m	1 to 25 mm²	1 to 16 mm²	-	Ø 5 mm	-	-
32 to 63 A	3.5 N.m	1 to 35 mm²	1 to 25 mm²	50 mm²		3 x 16 mm²	3 x 10 mm²



Clip on DIN rail 35 mm.




Indifferent position of installation.

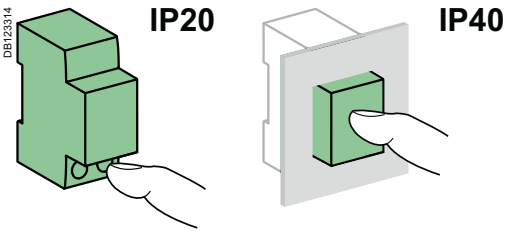

Technical data

Main characteristics		
According to IEC/EN 60947-2		
Insulation voltage (Ui)		500 V AC
Pollution degree		3
Rated impulse withstand voltage (Uimp)		6 kV
Thermal tripping	Reference temperature	50 °C
	Temperature derating	See module CA908007
Magnetic tripping	B curve	4 In ± 20 %
	C curve	8 In ± 20 %
	D curve	12 In ± 20 %
Utilization category		A
According to IEC/EN 60898-1		
Limitation class		3
Rated making and breaking capacity of an individual pole (Icn1)		Icn1 = Icn
Additional characteristics		
Breaking capacity under 1 pole with IT 380-415 V isolated neutral system (case of double fault)	40 A	4 kA
	50/63 A	3 kA
Degree of protection (IEC 60529)	Device only	IP20
	Device in modular enclosure	IP40 Insulation classe II
Endurance (O-C)	Electrical	10,000 cycles
	Mechanical	20,000 cycles
Overvoltage category (IEC 60364)		IV
Operating temperature		-35°C to +70°C
Storage temperature		-40°C to +85°C
Tropicalization (IEC 60068-1)		Treatment 2 (relative humidity 95 % to 55°C)

Dimensions (mm)

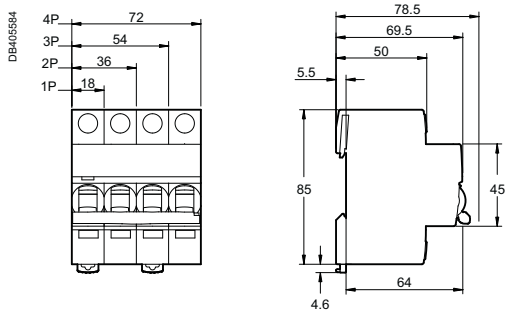

Weight (g)

Circuit-breaker	
Type	**iC60N**
1P	125
2P	250
3P	375
4P	500