


PIC and Logic Level Selectors/Jumpers

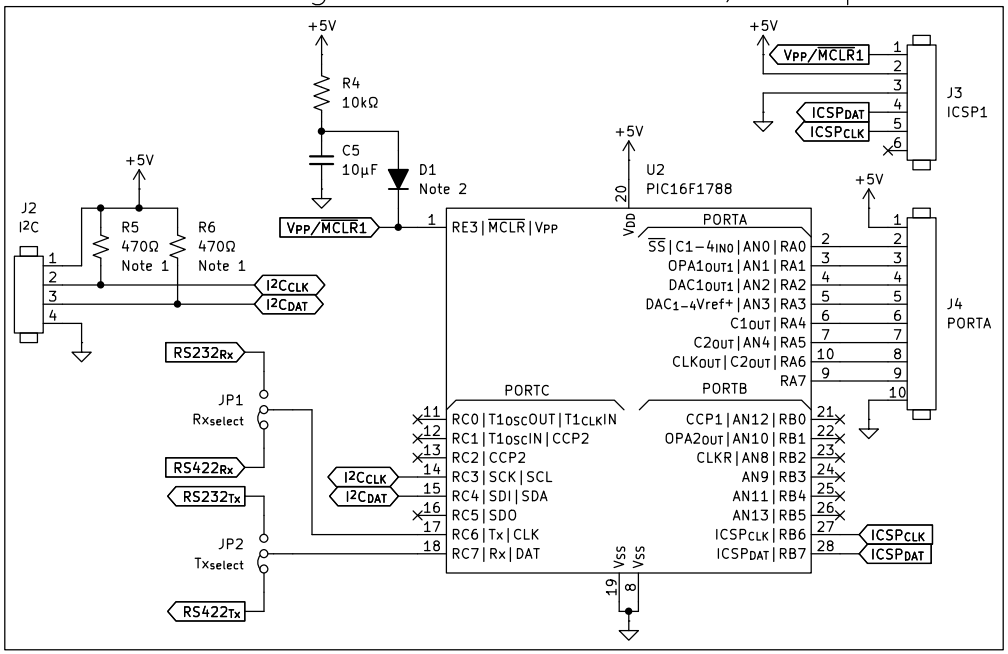


12V to 5V 3.5A Buck Regulator

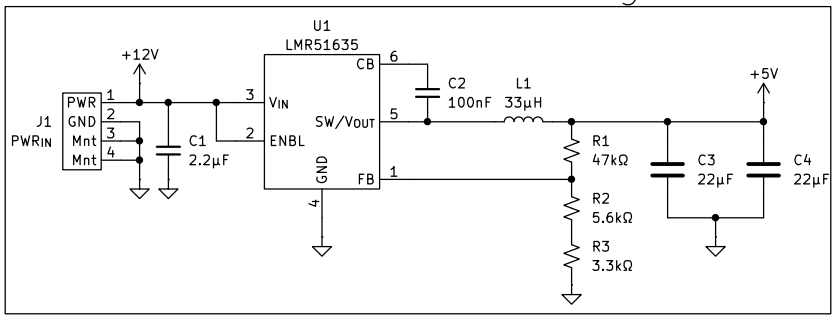

RS422–TTL Logic Converter

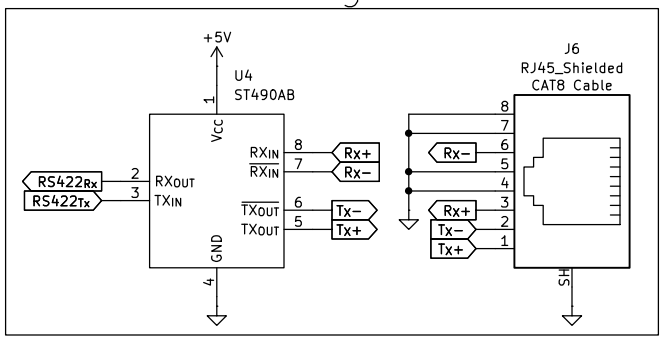

RS232–TTL Logic Converter

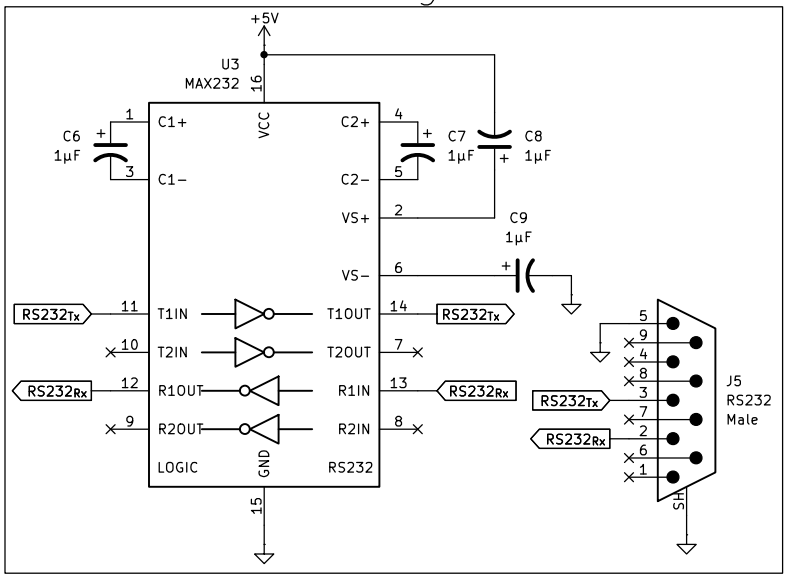

NOTE 1: I²C resistors (R1 & R2) are set to 470Ω by default to preserve signal fidelity, but can be adjusted UP TO 4.7kΩ as seen fit.

NOTE 2: D1 was tested with a 1N4148 gneral purpose diode; Any equivelant "GP" diode should be sufficient.

1132 Martin Luther King Jr. Way
Pocatello, ID 83209
Drawn By: Jonas Cram
Idaho State University

Idaho State University
ROBOTICS & COMMUNICATION SYSTEMS ENGINEERING TECHNOLOGY

Sheet: /
File: Control Station Schematics.kicad_sch

Project: Control Station Schematics

Title: Block Diagram

Size: USLetter	Date: 2026-11-11	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1