


RS232–TTL Logic Converter

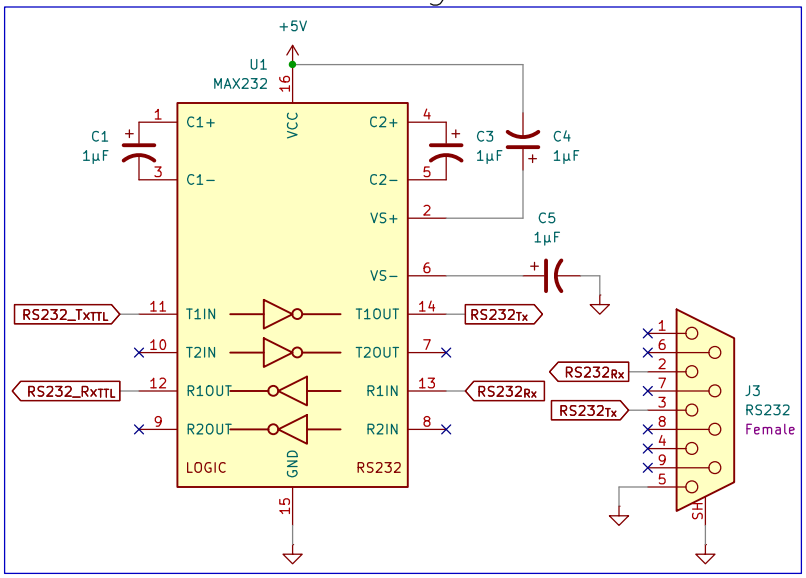


RS422–TTL Logic Converter

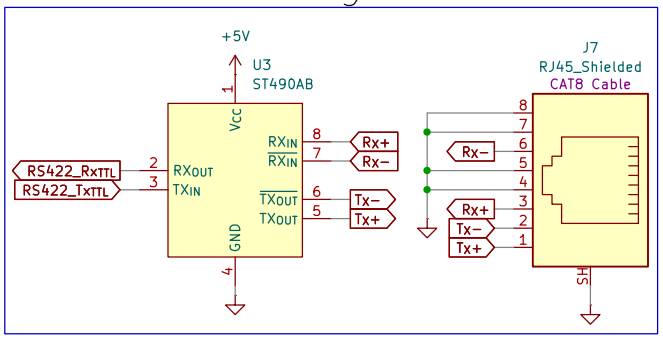

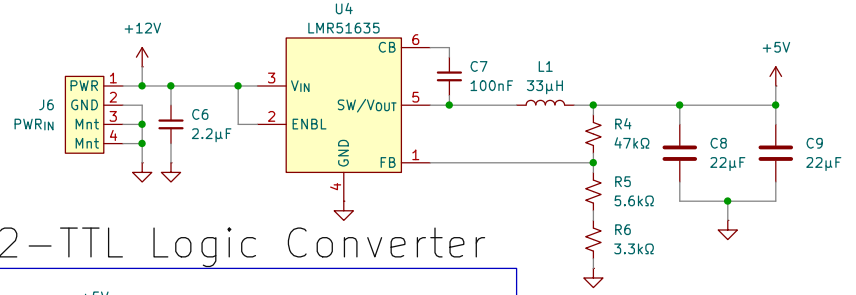


PIC and Logic Level Selectors/Jumpers

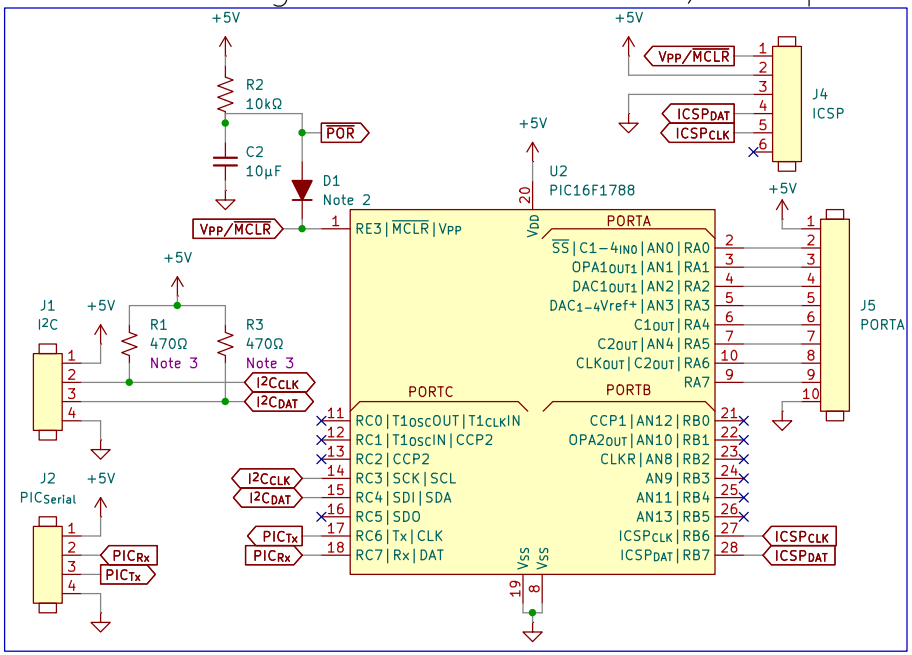

NOTE 1: Datasheet ratings $V_{OL\,MAX}$=0.7V and I_{OL}/I_{OH}=±20mA$_{MAX}$
Assuming the LED drops 2V, $V_{R\,LED}$=2.3V.
R_{LED} = 2.3V/20mA$_{MAX}$ = 115Ω$_{MIN}$
I_{LED} = 2.3V/240Ω = 9.583mA
NOTE 2: D3 was tested with a 1N4148 general purpose diode.
Any equivelant GP diode should be sufficient.
NOTE 3: I2C resistors are set to 470Ω by default to preserve signal fidelity, but can be adjusted UP TO 4.7kΩ as seen fit.

RF Transceiver

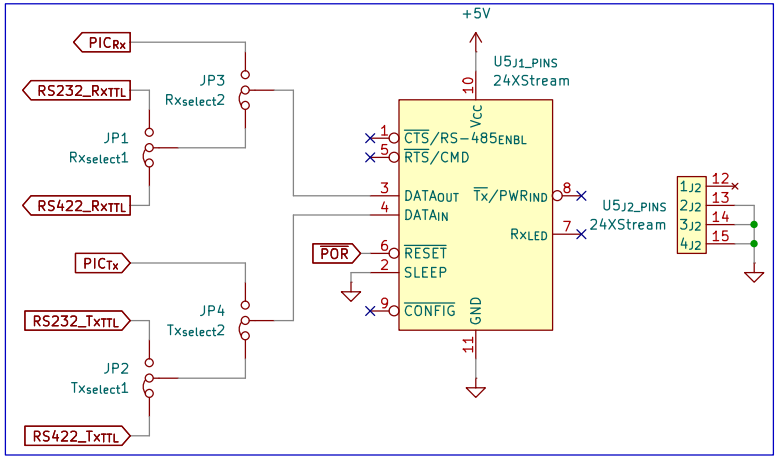

1132 Martin Luther King Jr. Way
Pocatello, ID 83209
Drawn By: Jonas Cram
Idaho State University

Idaho State University

ROBOTICS & COMMUNICATION SYSTEMS ENGINEERING TECHNOLOGY

Sheet: /
File: Receiver Schematics.kicad_sch

Project: Receiver Schematics

Title: Receiver Board

Size: USLetter	Date: 2026-11-09	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1