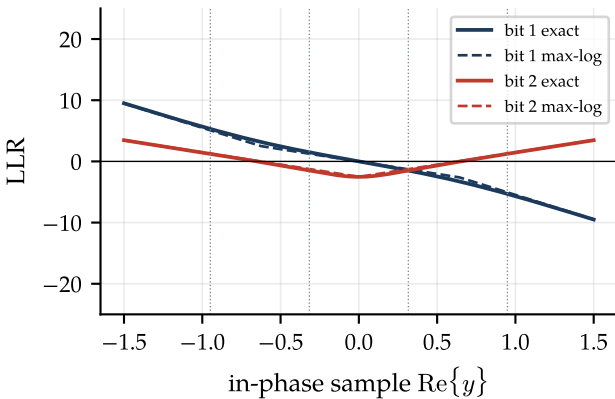


16-QAM in-phase bits, $E_s/N_0 = 5$ dBbit reliability, $E_s/N_0 = 12$ dB