


Teleprinter (ITA2, 45.45 baud): letter A = 11000, 7.5 units, 22 ms per unit



Serial port today (UART 8N1): byte 0x41 ('A'), least significant bit first

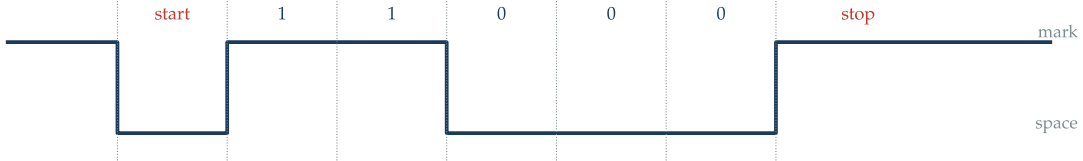