


DCO-OFDM: real signal + DC bias (dashed)



ACO-OFDM: odd subcarriers, negatives clipped

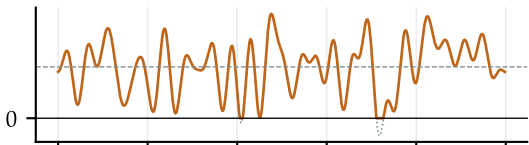