



LEGAL DISCLAIMER: THIS DOCUMENT AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF VERTIV. REPRODUCTION, DISTRIBUTION OR UNAUTHORIZED USE OF THIS DOCUMENT OR ANY PARTS WITHIN THIS DOCUMENT ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF VERTIV.


MVS MODULE (1 : 100)

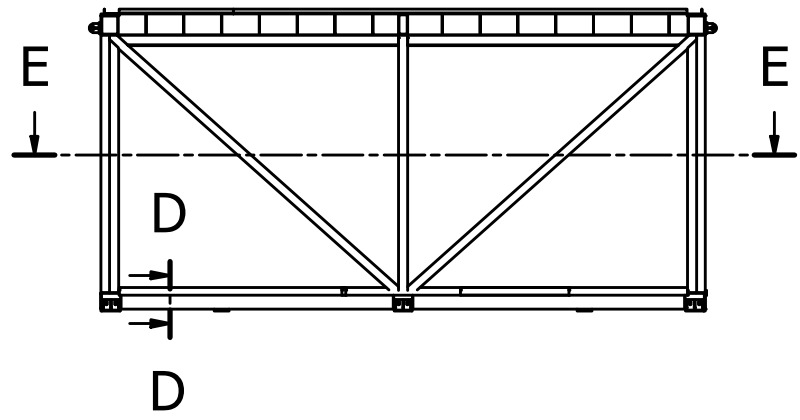

E-E (1 : 100)


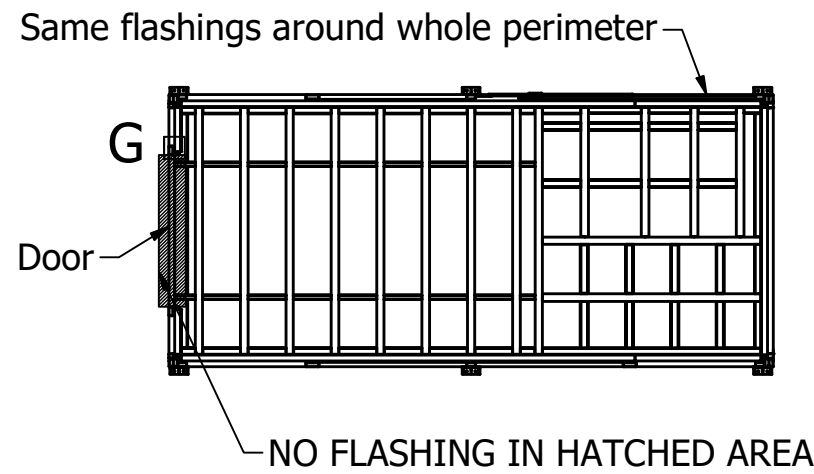


Typical detail D-D (1 : 10)


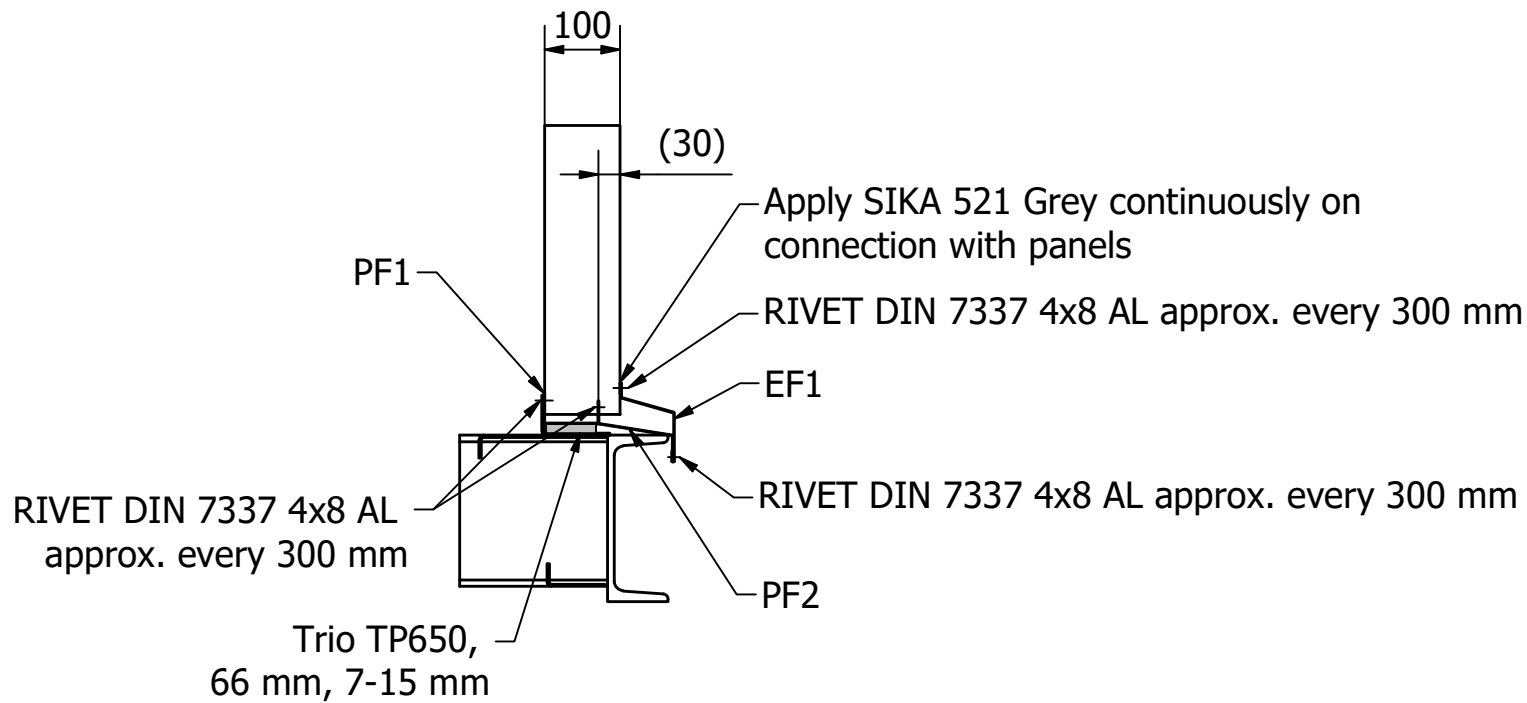


ITEM	PART NUMBER	DESCRIPTION	APPEARANCE	MASS	QTY
1	I00000285520	PF1 - Panel flashing	RAL9002	2,5 kg	9
2	I00000285528	PF2 - Panel flashing	RAL9006	3,1 kg	9
3	I00000286534	EF1 - External flashing 1	RAL9006	3,3 kg	9
4	/	RIVET DIN 7337 4x8 AL	Al	0 kg	96*
5	/	Illbruck Trio TP650, 66 mm, 7-15 mm, 6 m roll	/	0 kg	22 m*
6	/	SIKA Sikaflex 521 UV Grey	Grey	0 kg	600 ml*

* quantities are indicative

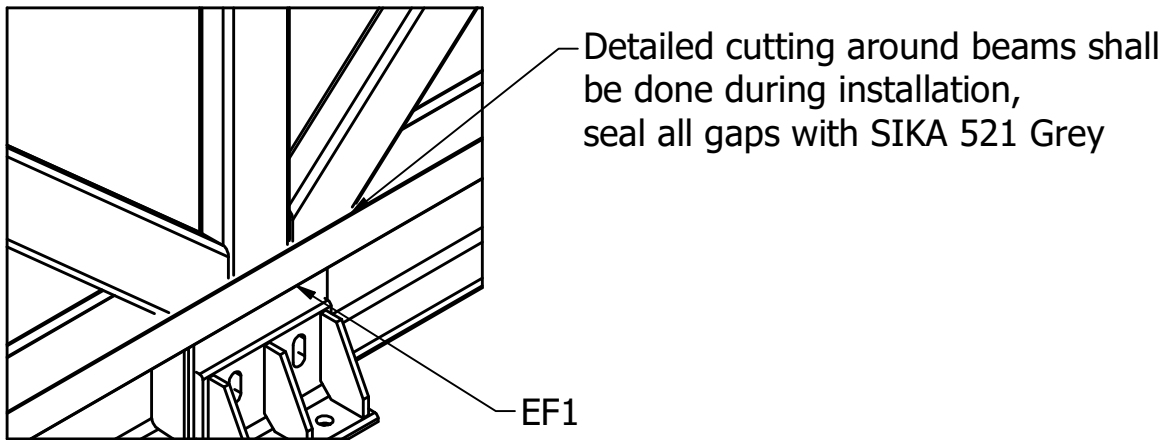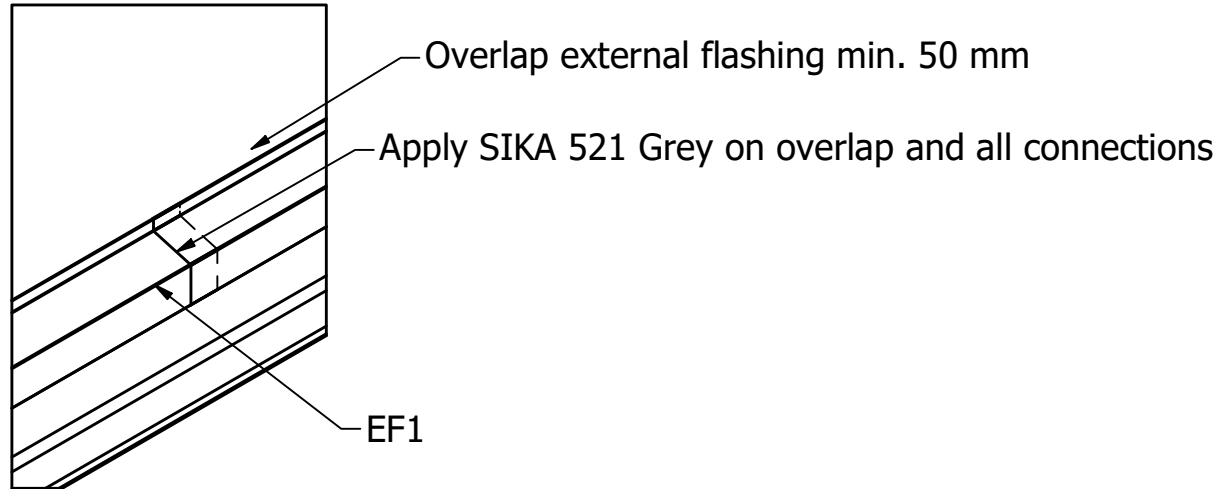

G (1 : 10)

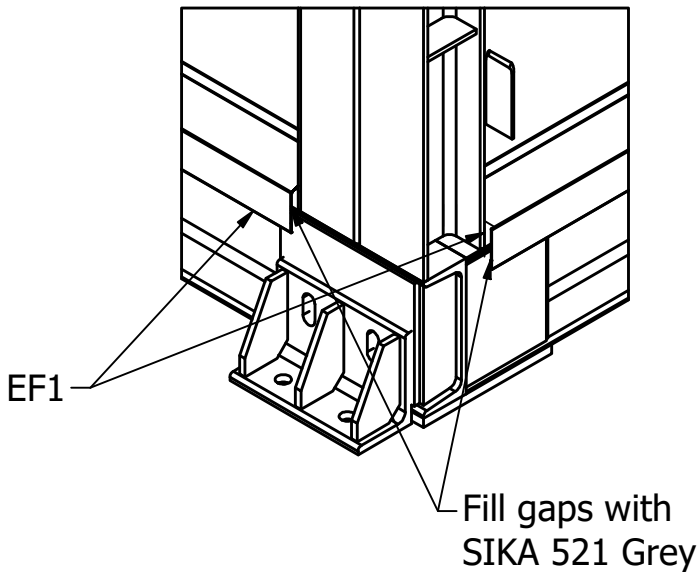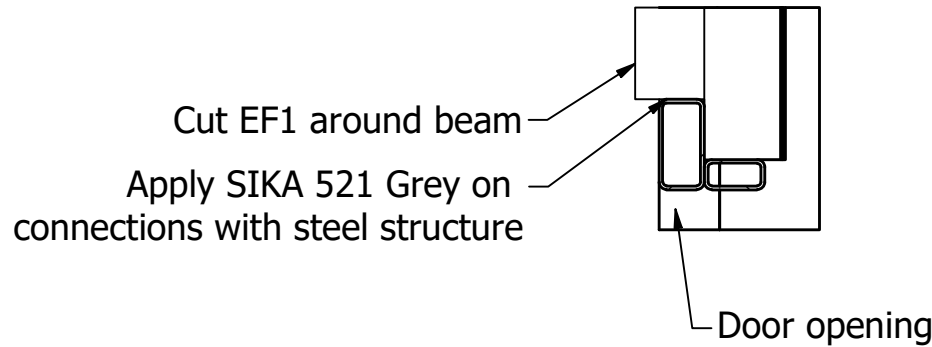

- NOTES:
- All flashings are 3000 mm in length, cut to size during installation
 - Apply blind rivets approx. every 300 mm
 - Seal gaps with SIKA Sikaflex 521 UV Grey

REVISION HISTORY					
REV	DESCRIPTION			DATE	
R0	FOR CONSTRUCTION			20.5.2026.	
	CAD system		Material	Finish	Weight
	Autodesk Inventor				N/A
	DIMENSIONAL TOLERANCES FOR WELDED STRUCTURE DIN EN ISO 13920 UNLESS OTHERWISE SPECIFIED		Project name		
	Sheet size	Scale	Drawing name / Description		
	A2	1 : 100	ECO DC INSTALLATION FLASHING		
Prepared (also subject responsible if other)			Document number / Part number		
M. BRATIC			ASI-104-MVS		
Document responsible/Approved			Rev	Date (DD.MM.YY)	Sheet
J.J. CICVARIC			R0	19.5.2026.	1 (1)