


Keypad Matrix

Columns do not have to be "actual columns", the same goes for Rows. They can be dynamically interpreted depending on the number of keys you want to connect

Buttons do not have to have a physical matrix arrangement, you can position them in any way imaginable

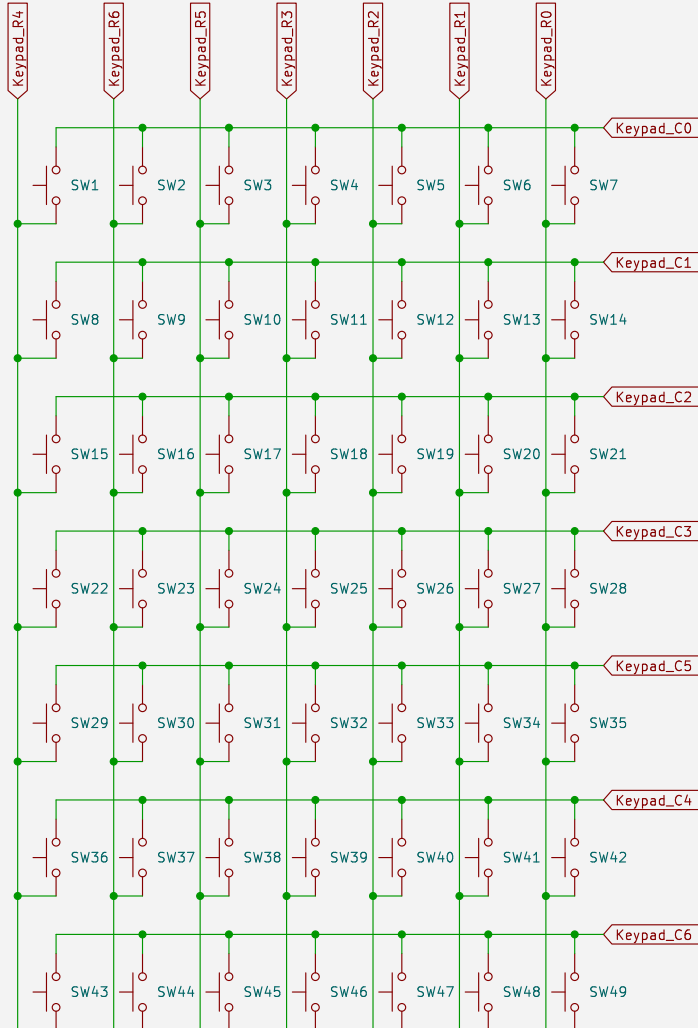


© Jonas Heselschwerdt under CC-BY-NC 4.0

Inter Board Connector

Hotplugging not recommended
Disable 3.3V rail with SW1 before unplugging

FPC 24P P0.5 J5

Side Display I2C Address: 0x3D
Main Display I2C Address: 0x3C

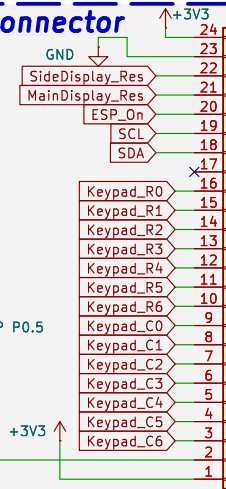


Side Display


I2C selected with IM0:2
I2C Address: 0x3D

Keep Capacitors close to Displays

Reference current of 12.5mA
 $R = 3.3V / 12.5mA$

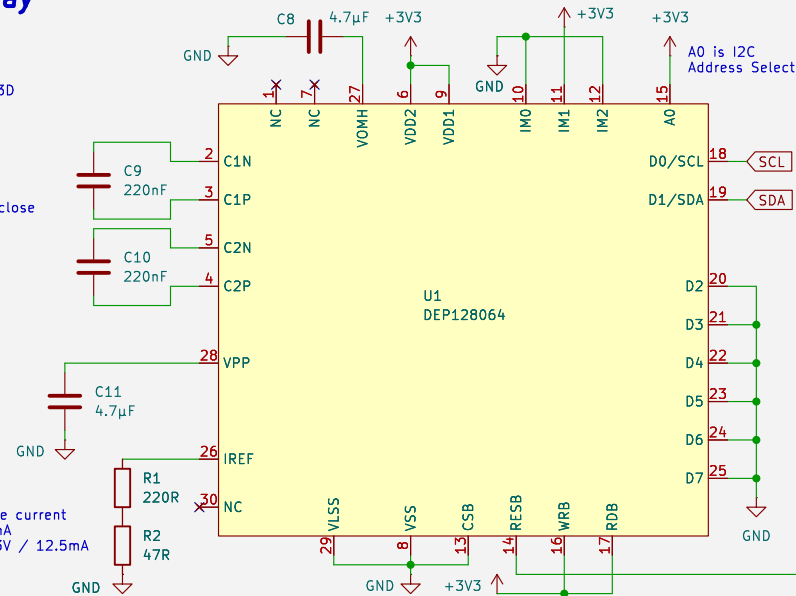


On Button



Main Display

I2C Address: 0x3C
I2C selected with IM1:2

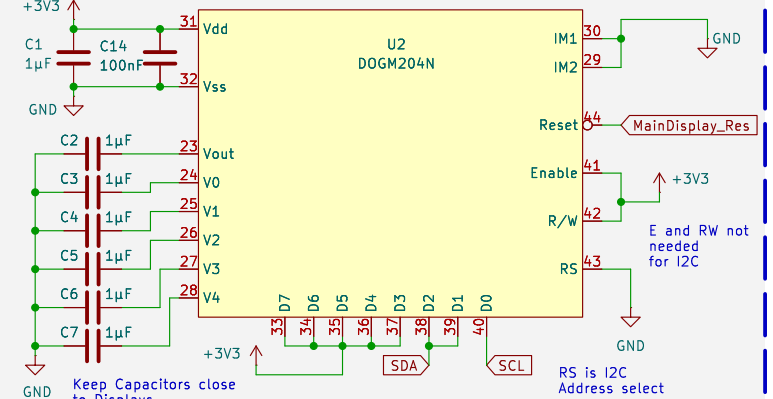

YouTube: @Electronics

Sheet: /
File: ChatGPTonCalcsUIBoardFX87_991.kicad_sch

Title: ChatGPT on Calculators UI Board for Casio FX87 and FX991

Size: A4 Date: 2026-05-31

KiCad E.D.A. 9.0.3

Rev: 0

Id: 1/1