

---

# **Tutorial: Creating an LLVM Toolchain for the Cpu0 Architecture**

*Release 12.0.1*

**Chen Chung-Shu**

**Dec 12, 2021**



# CONTENTS

<b>1</b>	<b>About</b>	<b>3</b>
1.1	Authors . . . . .	3
1.2	Acknowledgments . . . . .	3
1.3	Build steps . . . . .	3
1.4	Revision history . . . . .	4
1.5	Licensing . . . . .	4
1.6	Outline of Chapters . . . . .	5
<b>2</b>	<b>Cpu0 ELF linker</b>	<b>7</b>
2.1	ELF to Hex . . . . .	8
2.2	Create Cpu0 backend under LLD . . . . .	23
2.3	Summary . . . . .	47
<b>3</b>	<b>Optimization</b>	<b>49</b>
3.1	LLVM IR optimization . . . . .	49
3.2	Project . . . . .	53
<b>4</b>	<b>Library</b>	<b>55</b>
4.1	Compiler-rt . . . . .	55
4.2	Avr libc . . . . .	67
4.3	Software Float Point Support . . . . .	67
<b>5</b>	<b>Clang</b>	<b>71</b>
5.1	Cpu0 target . . . . .	71
5.2	Verify . . . . .	81
<b>6</b>	<b>Resources</b>	<b>85</b>
6.1	Build steps . . . . .	85
6.2	Book example code . . . . .	85
6.3	Alternate formats . . . . .	85
6.4	Presentation files . . . . .	85
6.5	Search this website . . . . .	85





Fig. 1: This book's flow



## ABOUT

- *Authors*
- *Acknowledgments*
- *Build steps*
- *Revision history*
- *Licensing*
- *Outline of Chapters*

### 1.1 Authors

陳鍾樞

Chen Chung-Shu

[gamma\\_chen@yahoo.com.tw](mailto:gamma_chen@yahoo.com.tw)

<http://jonathan2251.github.io/web/index.html>

### 1.2 Acknowledgments

I would like to thank Sean Silva, [chisophugis@gmail.com](mailto:chisophugis@gmail.com), for his help, encouragement, and assistance with the Sphinx document generator. Without his help, this book would not have been finished and published online. Also thanking those corrections from readers who make the book more accurate.

### 1.3 Build steps

<https://github.com/Jonathan2251/lbt/blob/master/README.md>

## 1.4 Revision history

Version 12.0.2, Not release yet.

Version 12.0.1, Release December 12, 2021.

Add target Cpu0 to clang

Version 12.0.0, Release August 11, 2021.

Version 3.9.1, Released April 29, 2020

Enable tailcall test option in build-slinker.sh

Version 3.9.0, Released November 22, 2016

Porting to llvm 3.9.

Version 3.7.4, Released September 22, 2016

Split elf2hex-dlinker.cpp from elf2hex.cpp in exlbt/elf2hex.

Version 3.7.3, Released July 20, 2016

Refine code-block according sphinx lexers. Add search this book.

Version 3.7.2, Released June 29, 2016

Dynamic linker change display from ret \$t9 to jr \$t9. Move llvm-objdump -elf2hex to elf2hex. Upgrade sphinx to 1.4.4.

Version 3.7.1, Released November 7, 2015

Remove EM\_CPU0\_EL. Add IR blockaddress and indirectbr support. Add ch\_9\_3\_detect\_exception.cpp test. Change display “ret \$rx” to “jr \$rx” where \$rx is not \$lr. Add Phi node test.

Version 3.7.0, Released September 24, 2015

Porting to lld 3.7.

Version 3.6.2, Released May 4, 2015

Move some test from lbt to lbd. Remove warning in build Cpu0 code.

**Version 3.6.1, Released March 22, 2015** Correct typing.

**Version 3.6.0, Released March 8, 2015** Porting to lld 3.6.

## 1.5 Licensing

<http://llvm.org/docs/DeveloperPolicy.html#license>



## 1.6 Outline of Chapters

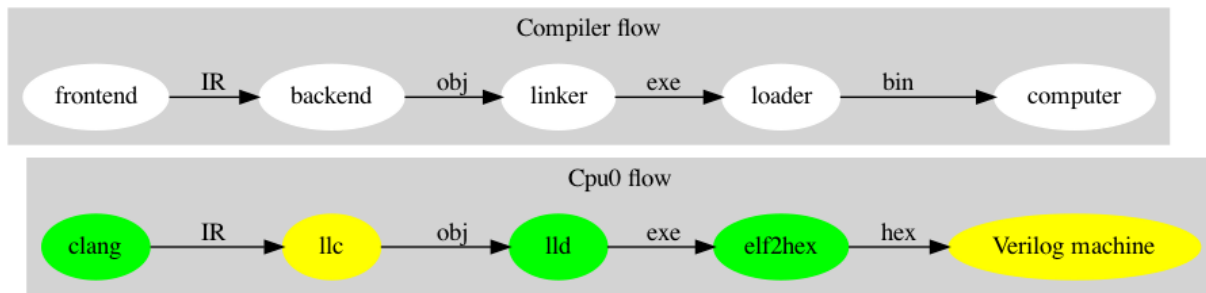


Fig. 1.1: Code generation and execution flow

The upper half of Fig. 1.1 is the work flow and software package of a computer program be generated and executed. IR stands for Intermediate Representation. The lower half is this book's work flow and software package of the toolchain extended implementation based on llvm. Except clang, the other blocks need to be extended for a new backend development. This book implement the green boxes part. The Cpu0 llvm backend can be find on <http://jonathan2251.github.io/lbd/index.html>.

This book include:

1. The elf2hex extended from llvm-objump. Chapter 2.
2. Optimization. Chapter 3.
3. Porting C standard library from avr libc and software floating point library from LLVM compiler-rt.
4. Add Cpu0 target to clang.

With these implementation, reader can generate Cpu0 machine code through Cpu0 llvm backend compiler, linker and elf2hex, then see how it runs on your computer.

*Cpu0 ELF linker:*

Develop ELF linker for Cpu0 backend based on lld project.

*Optimization:*

Backend independent optimaization.

*Library:*

Software floating point library and standard C library supporting. Under working.

*Clang:*

Add Cpu0 target to clang.



## CPU0 ELF LINKER

- *ELF to Hex*
- *Create Cpu0 backend under LLD*
  - *LLD introduction*
  - *Static linker*
  - *Dynamic linker*
- *Summary*
  - *Create a new backend base on LLVM*
  - *Contribute back to Open Source through working and learning*

LLD changes quickly and the figures of this chapter is not up to date. Like llvm, lld linker include a couple of target in ELF format handling. The term Cpu0 backend used in this chapter can refer to the ELF format handling for Cpu0 target machine under lld, llvm compiler backend, or both. But supposing readers will easy knowing what it refer to.

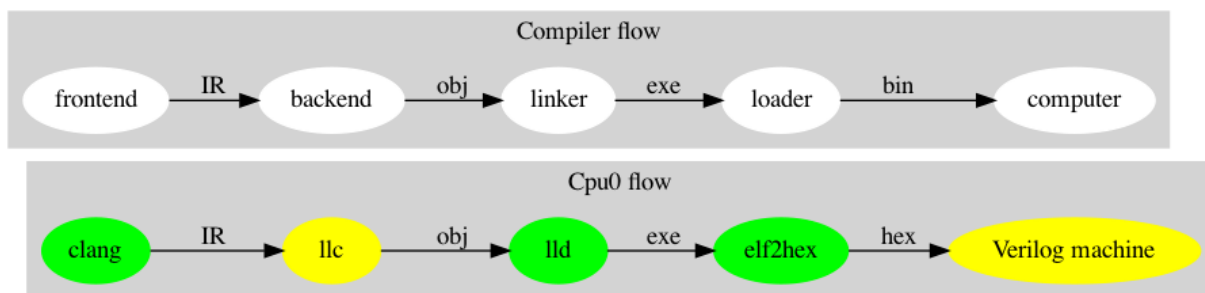


Fig. 2.1: Code generation and execution flow

As depicted in Fig. 2.1 of chapter About. Beside llvm backend, we implement ELF linker and elf2hex to run on Cpu0 verilog simulator. This chapter extends lld to support Cpu0 backend as well as elf2hex to replace Cpu0 loader. After link with lld, the program with global variables can be allocated in ELF file format layout. Meaning the relocation records of global variables is resolved. In addition, elf2hex is implemented for supporting generate Hex file from ELF. With these two tools supported, the global variables exists in section .data and .rodata can be accessed and transfered to Hex file which feeds to Verilog Cpu0 machine and run on your PC/Laptop.

As the previous chapters mentioned, Cpu0 has two relocation models for static link and dynamic link, respectively, which controlled by option `-relocation-model` in llc. This chapter supports the static link.

About lld please refer LLD web site here<sup>1</sup> and LLD install requirement on Linux here<sup>2</sup>. Currently, lld can be built by: gcc and clang compiler on Ubuntu. On iMac, lld can be built by clang with the Xcode version as the next sub section. If you run with Virtual Machine (VM), please keep your physical memory size setting over 1GB to avoid insufficient memory link error.

## 2.1 ELF to Hex

As follows,

### exlbt/elf2hex/CMakeLists.txt

```
# elf2hex.cpp needs backend related functions, like
# LLVMInitializeCpu0TargetInfo and LLVMInitializeCpu0Disassembler ... etc.
# Set LLVM_LINK_COMPONENTS then it can link them during the link stage.
set(LLVM_LINK_COMPONENTS
#   AllTargetsAsmPrinters
  AllTargetsDescs
  AllTargetsDisassemblers
  AllTargetsInfos
  BinaryFormat
  CodeGen
  DebugInfoDWARF
  DebugInfoPDB
  Demangle
  MC
  MCDisassembler
  Object
  Support
  Symbolize
)

add_llvm_tool(elf2hex
  elf2hex.cpp
)

if(HAVE_LIBXAR)
  target_link_libraries(elf2hex PRIVATE ${XAR_LIB})
endif()

if(LLVM_INSTALL_BINUTILS_SYMLINKS)
  add_llvm_tool_symlink(elf2hex elf2hex)
endif()
```

---

<sup>1</sup> <http://lld.llvm.org/>

<sup>2</sup> [http://lld.llvm.org/getting\\_started.html#on-unix-like-systems](http://lld.llvm.org/getting_started.html#on-unix-like-systems)

## exlbt/elf2hex/elf2hex.h

```

//
//                               The LLVM Compiler Infrastructure
//
// This file is distributed under the University of Illinois Open Source
// License. See LICENSE.TXT for details.
//
//====-----

#ifndef LLVM_TOOLS_ELF2HEX_ELF2HEX_H
#define LLVM_TOOLS_ELF2HEX_ELF2HEX_H

#include "llvm/DebugInfo/DIContext.h"
#include "llvm/MC/MCDisassembler/MCDisassembler.h"
#include "llvm/MC/MCInstPrinter.h"
#include "llvm/Support/CommandLine.h"
#include "llvm/Support/Compiler.h"
#include "llvm/Support/DataTypes.h"
#include "llvm/Object/Archive.h"

#include <stdio.h>
#include "llvm/Support/raw_ostream.h"

#define BOOT_SIZE 16

#define DLINK
// #define ELF2HEX_DEBUG

namespace llvm {
namespace elf2hex {

using namespace object;

class HexOut {
public:
    virtual void ProcessDisAsmInstruction(MCInst inst, uint64_t Size,
                                         ArrayRef<uint8_t> Bytes, const ObjectFile *Obj) = 0;
    virtual void ProcessDataSection(SectionRef Section) {};
    virtual ~HexOut() {};
};

// Split HexOut from Reader::DisassembleObject() for separating hex output
// functions.
class VerilogHex : public HexOut {
public:
    VerilogHex(std::unique_ptr<MCInstPrinter>& instructionPrinter,
               std::unique_ptr<const MCSubtargetInfo>& subTargetInfo,
               const ObjectFile *Obj);
    void ProcessDisAsmInstruction(MCInst inst, uint64_t Size,
                                  ArrayRef<uint8_t> Bytes, const ObjectFile *Obj) override;
    void ProcessDataSection(SectionRef Section) override;

```

(continues on next page)

(continued from previous page)

```

private:
    void PrintBootSection(uint64_t textOffset, uint64_t isrAddr, bool isLittleEndian);
    void Fill0s(uint64_t startAddr, uint64_t endAddr);
    void PrintDataSection(SectionRef Section);
    std::unique_ptr<MCInstPrinter>& IP;
    std::unique_ptr<const MCSubtargetInfo>& STI;
    uint64_t lastDumpAddr;
    unsigned si;
    StringRef sectionName;
};

class Reader {
public:
    void DisassembleObject(const ObjectFile *Obj,
                          std::unique_ptr<MCDisassembler>& DisAsm,
                          std::unique_ptr<MCInstPrinter>& IP,
                          std::unique_ptr<const MCSubtargetInfo>& STI);
    StringRef CurrentSymbol();
    SectionRef CurrentSection();
    unsigned CurrentSi();
    uint64_t CurrentIndex();

private:
    SectionRef _section;
    std::vector<std::pair<uint64_t, StringRef> > Symbols;
    unsigned si;
    uint64_t Index;
};

} // end namespace elf2hex
} // end namespace llvm

//using namespace llvm;

#endif

```

**exlbt/elf2hex/elf2hex.cpp**

```

//===-- llvm-objdump.cpp - Object file dumping utility for llvm =====//
//
//                               The LLVM Compiler Infrastructure
//
// This file is distributed under the University of Illinois Open Source
// License. See LICENSE.TXT for details.
//
//===-----
//
// This program is a utility that works like binutils "objdump", that is, it
// dumps out a plethora of information about an object file depending on the

```

(continues on next page)

(continued from previous page)

```

// flags.
//
// The flags and output of this program should be near identical to those of
// binutils objdump.
//
//===-----
#define ELF2HEX

#include "elf2hex.h"
#include "llvm/MC/MCAsmInfo.h"
#include "llvm/MC/MCContext.h"
#include "llvm/MC/MCInst.h"
#include "llvm/MC/MCInstrAnalysis.h"
#include "llvm/MC/MCInstrInfo.h"
#include "llvm/MC/MCObjectFileInfo.h"
#include "llvm/MC/MCTargetOptions.h"
#include "llvm/Object/MachO.h"
#include "llvm/Support/InitLLVM.h"
#include "llvm/Support/TargetRegistry.h"
#include "llvm/Support/TargetSelect.h"

using namespace llvm;
using namespace llvm::object;

staticStringRef ToolName;
staticStringRef CurrInputFile;

// copy from llvm-objdump.cpp
LLVM_ATTRIBUTE_NORETURN void reportError(StringRef File,
                                         const Twine &Message) {
    outs().flush();
    WithColor::error(errs(), ToolName) << "'" << File << ": " << Message << "\n";
    exit(1);
}

// copy from llvm-objdump.h
template <typename T, typename... Ts>
T unwrapOrError(Expected<T> EO, Ts &&... Args) {
    if (EO)
        return std::move(*EO);
    assert(0 && "error in unwrapOrError()");
}

// copy from llvm-objdump.cpp
static cl::OptionCategory Elf2hexCat("elf2hex Options");

static cl::list<std::string> InputFileNames(cl::Positional,
                                           cl::desc("<input object files>"),
                                           cl::ZeroOrMore,
                                           cl::cat(Elf2hexCat));

std::string TripleName = "";

```

(continues on next page)

(continued from previous page)

```

static const Target *getTarget(const ObjectFile *Obj) {
    // Figure out the target triple.
    Triple TheTriple("unknown-unknown-unknown");
    TheTriple = Obj->makeTriple();

    // Get the target specific parser.
    std::string Error;
    const Target *TheTarget = TargetRegistry::lookupTarget("", TheTriple,
                                                            Error);
    if (!TheTarget)
        reportError(Obj->getFileName(), "can't find target: " + Error);

    // Update the triple name and return the found target.
    TripleName = TheTriple.getTriple();
    return TheTarget;
}

bool isRelocAddressLess(RelocationRef A, RelocationRef B) {
    return A.getOffset() < B.getOffset();
}

void error(std::error_code EC) {
    if (!EC)
        return;
    WithColor::error(errs(), ToolName)
        << "reading file: " << EC.message() << ".\n";
    errs().flush();
    exit(1);
}

static void getName(llvm::object::SectionRef const &Section,StringRef Name) {
    Name = unwrapOrError(Section.getName(), CurrInputFile);
#ifdef ELF2HEX_DEBUG
    llvm::dbgs() << Name << "\n";
#endif
}

static cl::opt<bool>
LittleEndian("le",
cl::desc("Little endian format"));

#ifdef ELF2HEX_DEBUG
// Modified from PrintSectionHeaders()
uint64_t GetSectionHeaderStartAddress(const ObjectFile *Obj,
    StringRef sectionName) {
    // outs() << "Sections:\n"
    //      "Idx Name          Size      Address          Type\n";
    std::error_code ec;
    unsigned i = 0;
    for (const SectionRef &Section : Obj->sections()) {

```

(continues on next page)



(continued from previous page)

```

    error(ec);
   StringRef Name;
    error(getName(Section, Name));
    uint64_t Address;
    Address = Section.getAddress();
    uint64_t Size;
    Size = Section.getSize();
    bool Text;
    Text = Section.isText();
    if (Name == sectionName)
        return Address;
    else
        return 0;
    ++i;
}
return 0;
}
#endif

// Reference from llvm::printSymbolTable of llvm-objdump.cpp
uint64_t GetSymbolAddress(const ObjectFile *o, StringRef SymbolName) {
    for (const SymbolRef &Symbol : o->symbols()) {
        Expected<uint64_t> AddressOrError = Symbol.getAddress();
        if (!AddressOrError)
            reportError(o->getFileName(), SymbolName);
        uint64_t Address = *AddressOrError;
        Expected<SymbolRef::Type> TypeOrError = Symbol.getType();
        if (!TypeOrError)
            reportError(o->getFileName(), SymbolName);
        SymbolRef::Type Type = *TypeOrError;
        section_iterator Section = unwrapOrError(Symbol.getSection(), CurrInputFile);
        StringRef Name;
        if (Type == SymbolRef::ST_Debug && Section != o->section_end()) {
            if (Expected<StringRef> NameOrErr = Section->getName())
                Name = *NameOrErr;
            else
                consumeError(NameOrErr.takeError());
        } else {
            Name = unwrapOrError(Symbol.getName(), o->getFileName());
        }
        if (Name == SymbolName)
            return Address;
    }
    return 0;
}

uint64_t SectionOffset(const ObjectFile *o, StringRef secName) {
    for (const SectionRef &Section : o->sections()) {
        StringRef Name;
        uint64_t BaseAddr;
        Name = unwrapOrError(Section.getName(), o->getFileName());
        unwrapOrError(Section.getContents(), o->getFileName());
    }
}

```

(continues on next page)

(continued from previous page)

```

    BaseAddr = Section.getAddress();

    if (Name == secName)
        return BaseAddr;
    }
    return 0;
}

using namespace llvm::elf2hex;

Reader reader;

VerilogHex::VerilogHex(std::unique_ptr<MCInstPrinter>& instructionPointer,
    std::unique_ptr<const MCSubtargetInfo>& subTargetInfo, const ObjectFile *Obj) :
    IP(instructionPointer), STI(subTargetInfo) {
    lastDumpAddr = 0;
#ifdef ELF2HEX_DEBUG
    //uint64_t startAddr = GetSectionHeaderStartAddress(Obj, "_start");
    //errs() << format("_start address:%08" PRIx64 "\n", startAddr);
#endif
    uint64_t isrAddr = GetSymbolAddress(Obj, "ISR");
    errs() << format("ISR address:%08" PRIx64 "\n", isrAddr);

    //uint64_t pltOffset = SectionOffset(Obj, ".plt");
    uint64_t textOffset = SectionOffset(Obj, ".text");
    PrintBootSection(textOffset, isrAddr, LittleEndian);
    lastDumpAddr = BOOT_SIZE;
    Fill0s(lastDumpAddr, 0x100);
    lastDumpAddr = 0x100;
}

void VerilogHex::PrintBootSection(uint64_t textOffset, uint64_t isrAddr,
    bool isLittleEndian) {
    uint64_t offset = textOffset - 4;

    // isr instruction at 0x8 and PC counter point to next instruction
    uint64_t isrOffset = isrAddr - 8 - 4;
    if (isLittleEndian) {
        outs() << "/*      0:*/      ";
        outs() << format("%02" PRIx64 " ", (offset & 0xff));
        outs() << format("%02" PRIx64 " ", (offset & 0xff00) >> 8);
        outs() << format("%02" PRIx64 " ", (offset & 0xff0000) >> 16);
        outs() << " 36";
        outs() << "                                /*      jmp      0x";
        outs() << format("%02" PRIx64 "%02" PRIx64 "%02" PRIx64 " */\n",
            (offset & 0xff0000) >> 16, (offset & 0xff00) >> 8, (offset & 0xff));
        outs() <<
            "/*      4:*/      04 00 00 36                                /
↪ *      jmp      4 */\n";
        offset -= 8;
        outs() << "/*      8:*/      ";
        outs() << format("%02" PRIx64 " ", (isrOffset & 0xff));
    }
}

```

(continues on next page)

(continued from previous page)

```

outs() << format("%02" PRIx64 " ", (isrOffset & 0xff00) >> 8);
outs() << format("%02" PRIx64 "", (isrOffset & 0xff0000) >> 16);
outs() << " 36";
outs() << "                                /*      jmp      0x";
outs() << format("%02" PRIx64 "%02" PRIx64 "%02" PRIx64 " */\n",
    (isrOffset & 0xff0000) >> 16, (isrOffset & 0xff00) >> 8, (isrOffset & 0xff));
outs() <<
    "/*      c:*/      fc ff ff 36                                /
→ *      jmp      -4 */\n";
}
else {
    outs() << "/*      0:*/      36 ";
    outs() << format("%02" PRIx64 " ", (offset & 0xff0000) >> 16);
    outs() << format("%02" PRIx64 " ", (offset & 0xff00) >> 8);
    outs() << format("%02" PRIx64 "", (offset & 0xff));
    outs() << "                                /*      jmp      0x";
    outs() << format("%02" PRIx64 "%02" PRIx64 "%02" PRIx64 " */\n",
        (offset & 0xff0000) >> 16, (offset & 0xff00) >> 8, (offset & 0xff));
    outs() <<
        "/*      4:*/      36 00 00 04                                /
→ *      jmp      4 */\n";
    offset -= 8;
    outs() << "/*      8:*/      36 ";
    outs() << format("%02" PRIx64 " ", (isrOffset & 0xff0000) >> 16);
    outs() << format("%02" PRIx64 " ", (isrOffset & 0xff00) >> 8);
    outs() << format("%02" PRIx64 "", (isrOffset & 0xff));
    outs() << "                                /*      jmp      0x";
    outs() << format("%02" PRIx64 "%02" PRIx64 "%02" PRIx64 " */\n",
        (isrOffset & 0xff0000) >> 16, (isrOffset & 0xff00) >> 8, (isrOffset & 0xff));
    outs() <<
        "/*      c:*/      36 ff ff fc                                /
→ *      jmp      -4 */\n";
}
}

// Fill /*address*/ 00 00 00 00 [startAddr..endAddr] from startAddr to endAddr.
// Include startAddr and endAddr.
void VerilogHex::Fill0s(uint64_t startAddr, uint64_t endAddr) {
    std::size_t addr;

    assert((startAddr <= endAddr) && "startAddr must <= BaseAddr");
    // Fill /*address*/ 00 00 00 00 for 4 bytes alignment (1 Cpu0 word size)
    for (addr = startAddr; addr < endAddr; addr += 4) {
        outs() << format("/%8" PRIx64 " */", addr);
        outs() << format("%02" PRIx64 " ", 0) << format("%02" PRIx64 " ", 0) \
            << format("%02" PRIx64 " ", 0) << format("%02" PRIx64 " ", 0) << '\n';
    }

    return;
}

void VerilogHex::ProcessDisAsmInstruction(MCInst inst, uint64_t Size,

```

(continues on next page)

(continued from previous page)

```

                                ArrayRef<uint8_t> Bytes, const ObjectFile *Obj) {
    SectionRef Section = reader.CurrentSection();
   StringRef Name;
   StringRef Contents;
    Name = unwrapOrError(Section.getName(), Obj->getFileName());
    unwrapOrError(Section.getContents(), Obj->getFileName());
    uint64_t SectionAddr = Section.getAddress();
    uint64_t Index = reader.CurrentIndex();
#ifdef ELF2HEX_DEBUG
    errs() << format("SectionAddr + Index = %8" PRIx64 "\n", SectionAddr + Index);
    errs() << format("lastDumpAddr %8" PRIx64 "\n", lastDumpAddr);
#endif
    if (lastDumpAddr < SectionAddr) {
        Fill0s(lastDumpAddr, SectionAddr - 1);
        lastDumpAddr = SectionAddr;
    }

    // print section name when meeting it first time
    if (sectionName != Name) {
        StringRef SegmentName = "";
        if (const MachOObjectFile *MachO =
            dyn_cast<const MachOObjectFile>(Obj)) {
            DataRefImpl DR = Section.getRawDataRefImpl();
            SegmentName = MachO->getSectionFinalSegmentName(DR);
        }
        outs() << "/*" << "Disassembly of section ";
        if (!SegmentName.empty())
            outs() << SegmentName << ", ";
        outs() << Name << ':' << "*/";
        sectionName = Name;
    }

    if (si != reader.CurrentSi()) {
        // print function name in section .text just before the first instruction
        // is printed
        outs() << '\n' << "/*" << reader.CurrentSymbol() << "*/\n";
        si = reader.CurrentSi();
    }

    // print instruction address
    outs() << format("/%8" PRIx64 "*/", SectionAddr + Index);

    // print instruction in hex format
    outs() << "\t";
    dumpBytes(Bytes.slice(Index, Size), outs());

    outs() << "/*";
    // print disassembly instruction to outs()
    IP->printInst(&inst, 0, "", *STI, outs());
    outs() << "*/";
    outs() << "\n";

```

(continues on next page)

(continued from previous page)

```

// In section .plt or .text, the Contents.size() maybe < (SectionAddr + Index + 4)
if (Contents.size() < (SectionAddr + Index + 4))
    lastDumpAddr = SectionAddr + Index + 4;
else
    lastDumpAddr = SectionAddr + Contents.size();
}

void VerilogHex::ProcessDataSection(SectionRef Section) {
    std::string Error;
    StringRef Name;
    StringRef Contents;
    uint64_t BaseAddr;
    uint64_t size;
    getName(Section, Name);
    unwrapOrError(Section.getContents(), CurrInputFile);
    BaseAddr = Section.getAddress();

#ifdef ELF2HEX_DEBUG
    errs() << format("BaseAddr = %8" PRIx64 "\n", BaseAddr);
    errs() << format("lastDumpAddr %8" PRIx64 "\n", lastDumpAddr);
#endif
    if (lastDumpAddr < BaseAddr) {
        Fill0s(lastDumpAddr, BaseAddr - 1);
        lastDumpAddr = BaseAddr;
    }
    if ((Name == ".bss" || Name == ".sbss") && Contents.size() > 0) {
        size = (Contents.size() + 3)/4*4;
        Fill0s(BaseAddr, BaseAddr + size - 1);
        lastDumpAddr = BaseAddr + size;
        return;
    }
    else {
        PrintDataSection(Section);
    }
}

void VerilogHex::PrintDataSection(SectionRef Section) {
    std::string Error;
    StringRef Name;
    uint64_t BaseAddr;
    uint64_t size;
    getName(Section, Name);
    StringRef Contents = unwrapOrError(Section.getContents(), CurrInputFile);
    BaseAddr = Section.getAddress();

    if (Contents.size() <= 0) {
        return;
    }
    size = (Contents.size()+3)/4*4;

    outs() << "/*Contents of section " << Name << ":\n";
    // Dump out the content as hex and printable ascii characters.

```

(continues on next page)

(continued from previous page)

```

for (std::size_t addr = 0, end = Contents.size(); addr < end; addr += 16) {
    outs() << format("/%8" PRIx64 " */", BaseAddr + addr);
    // Dump line of hex.
    for (std::size_t i = 0; i < 16; ++i) {
        if (i != 0 && i % 4 == 0)
            outs() << ' ';
        if (addr + i < end)
            outs() << hexdigit((Contents[addr + i] >> 4) & 0xF, true)
                << hexdigit(Contents[addr + i] & 0xF, true) << " ";
    }
    // Print ascii.
    outs() << "/*" << " ";
    for (std::size_t i = 0; i < 16 && addr + i < end; ++i) {
        if (std::isprint(static_cast<unsigned char>(Contents[addr + i]) & 0xFF))
            outs() << Contents[addr + i];
        else
            outs() << ".";
    }
    outs() << "*/" << "\n";
}
for (std::size_t i = Contents.size(); i < size; i++) {
    outs() << "\00 ";
}
outs() << "\n";
#ifdef ELF2HEX_DEBUG
errs() << "Name " << Name << " BaseAddr ";
errs() << format("%8" PRIx64 " Contents.size() ", BaseAddr);
errs() << format("%8" PRIx64 " size ", Contents.size());
errs() << format("%8" PRIx64 " \n", size);
#endif
// save the end address of this section to lastDumpAddr
lastDumpAddr = BaseAddr + size;
}

StringRef Reader::CurrentSymbol() {
    return Symbols[si].second;
}

SectionRef Reader::CurrentSection() {
    return _section;
}

unsigned Reader::CurrentSi() {
    return si;
}

uint64_t Reader::CurrentIndex() {
    return Index;
}

// Porting from DisassembleObject() of llvm-objdump.cpp
void Reader::DisassembleObject(const ObjectFile *Obj

```

(continues on next page)

(continued from previous page)

```

/*, bool InlineRelocs*/ , std::unique_ptr<MCDisassembler>& DisAsm,
std::unique_ptr<MCInstPrinter>& IP,
std::unique_ptr<const MCSubtargetInfo>& STI) {
  VerilogHex hexOut(IP, STI, Obj);
  std::error_code ec;
  for (const SectionRef &Section : Obj->sections()) {
    _section = Section;
    uint64_t BaseAddr;
    unwrapOnError(Section.getContents(), Obj->getFileName());
    BaseAddr = Section.getAddress();
    uint64_t SectSize = Section.getSize();
    if (!SectSize)
      continue;

    if (BaseAddr < 0x100)
      continue;

#ifdef ELF2HEX_DEBUG
    StringRef SectionName = unwrapOnError(Section.getName(), Obj->getFileName());
    errs() << "SectionName " << SectionName << format(" BaseAddr %8" PRIx64 "\n",
↳BaseAddr);
#endif

    bool text;
    text = Section.isText();
    if (!text) {
      hexOut.ProcessDataSection(Section);
      continue;
    }
    // It's .text section
    uint64_t SectionAddr;
    SectionAddr = Section.getAddress();

    // Make a list of all the symbols in this section.
    for (const SymbolRef &Symbol : Obj->symbols()) {
      if (Section.containsSymbol(Symbol)) {
        Expected<uint64_t> AddressOrErr = Symbol.getAddress();
        error(errorToErrorCode(AddressOrErr.takeError()));
        uint64_t Address = *AddressOrErr;
        Address -= SectionAddr;
        if (Address >= SectSize)
          continue;

        Expected<StringRef> Name = Symbol.getName();
        error(errorToErrorCode(Name.takeError()));
        Symbols.push_back(std::make_pair(Address, *Name));
      }
    }

    // Sort the symbols by address, just in case they didn't come in that way.
    array_pod_sort(Symbols.begin(), Symbols.end());
#ifdef ELF2HEX_DEBUG

```

(continues on next page)

(continued from previous page)

```

    for (unsigned si = 0, se = Symbols.size(); si != se; ++si) {
        errs() << '\n' << "/" << Symbols[si].first << " " << Symbols[si].second << "*/\n";
    }
#endif

    // Make a list of all the relocations for this section.
    std::vector<RelocationRef> Rels;

    // Sort relocations by address.
    std::sort(Rels.begin(), Rels.end(), isRelocAddressLess);

   StringRef name;
    getName(Section, name);

    // If the section has no symbols just insert a dummy one and disassemble
    // the whole section.
    if (Symbols.empty())
        Symbols.push_back(std::make_pair(0, name));

    SmallString<40> Comments;
    raw_svector_ostream CommentStream(Comments);

    ArrayRef<uint8_t> Bytes = arrayRefFromStringRef(
        unwrapOrError(Section.getContents(), Obj->getFileName()));
#if 0
    Section.getContents();
    ArrayRef<uint8_t> Bytes(reinterpret_cast<const uint8_t *>(BytesStr.data()),
        BytesStr.size());
#endif
    uint64_t Size;
    SectSize = Section.getSize();

    // Disassemble symbol by symbol.
    unsigned se;
    for (si = 0, se = Symbols.size(); si != se; ++si) {
        uint64_t Start = Symbols[si].first;
        uint64_t End;
        // The end is either the size of the section or the beginning of the next
        // symbol.
        if (si == se - 1)
            End = SectSize;
        // Make sure this symbol takes up space.
        else if (Symbols[si + 1].first != Start)
            End = Symbols[si + 1].first - 1;
        else {
            continue;
        }

        for (Index = Start; Index < End; Index += Size) {
            MCInst Inst;
            if (DisAsm->getInstruction(Inst, Size, Bytes.slice(Index),

```

(continues on next page)



(continued from previous page)

```

        SectionAddr + Index, CommentStream)) {
    hexOut.ProcessDisasmInstruction(Inst, Size, Bytes, Obj);
} else {
    errs() << ToolName << ": warning: invalid instruction encoding\n";
    if (Size == 0)
        Size = 1; // skip illegible bytes
    }
} // for
} // for
}
}

// Porting from disassembleObject() of llvm-objdump.cpp
static void Elf2Hex(const ObjectFile *Obj) {

    const Target *TheTarget = getTarget(Obj);

    // Package up features to be passed to target/subtarget
    SubtargetFeatures Features = Obj->getFeatures();

    std::unique_ptr<const MCRegisterInfo> MRI(TheTarget->createMCRegInfo(TripleName));
    if (!MRI)
        report_fatal_error("error: no register info for target " + TripleName);

    // Set up disassembler.
    MCTargetOptions MCOptions;
    std::unique_ptr<const MCAsmInfo> AsmInfo(
        TheTarget->createMCAsmInfo(*MRI, TripleName, MCOptions));
    if (!AsmInfo)
        report_fatal_error("error: no assembly info for target " + TripleName);

    std::unique_ptr<const MCSubtargetInfo> STI(
        TheTarget->createMCSubtargetInfo(TripleName, "", Features.getString()));
    if (!STI)
        report_fatal_error("error: no subtarget info for target " + TripleName);

    std::unique_ptr<const MCInstrInfo> MII(TheTarget->createMCInstrInfo());
    if (!MII)
        report_fatal_error("error: no instruction info for target " + TripleName);

    MCOBJECTFileInfo MOFI;
    MCContext Ctx(AsmInfo.get(), MRI.get(), &MOFI);
    // FIXME: for now initialize MCOBJECTFileInfo with default values
    MOFI.InitMCOBJECTFileInfo(Triple(TripleName), false, Ctx);

    std::unique_ptr<MCDisassembler> DisAsm(
        TheTarget->createMCDisassembler(*STI, Ctx));
    if (!DisAsm)
        report_fatal_error("error: no disassembler for target " + TripleName);

    std::unique_ptr<const MCInstrAnalysis> MIA(
        TheTarget->createMCInstrAnalysis(MII.get()));

```

(continues on next page)

(continued from previous page)

```

int AsmPrinterVariant = AsmInfo->getAssemblerDialect();
std::unique_ptr<MCInstPrinter> IP(TheTarget->createMCInstPrinter(
    Triple(TripleName), AsmPrinterVariant, *AsmInfo, *MII, *MRI));
if (!IP)
    report_fatal_error("error: no instruction printer for target " +
                       TripleName);

std::error_code EC;
reader.DisassembleObject(Obj, DisAsm, IP, STI);
}

static void DumpObject(const ObjectFile *o) {
    outs() << "/*";
    outs() << o->getFileName()
        << ":\tfile format " << o->getFileFormatName() << "*/";
    outs() << "\n\n";

    Elf2Hex(o);
}

/// @brief Open file and figure out how to dump it.
static void DumpInput(StringRef file) {
    CurrInputFile = file;
    // Attempt to open the binary.
    Expected<OwningBinary<Binary>> BinaryOrErr = createBinary(file);
    if (!BinaryOrErr)
        reportError(file, "no this file");

    Binary &Binary = *BinaryOrErr.get().getBinary();

    if (ObjectFile *o = dyn_cast<ObjectFile>(&Binary))
        DumpObject(o);
    else
        reportError(file, "invalid_file_type");
}

int main(int argc, char **argv) {
    // Print a stack trace if we signal out.
    //sys::PrintStackTraceOnErrorSignal(argv[0]);
    //PrettyStackTraceProgram X(argc, argv);
    //llvm_shutdown_obj Y; // Call llvm_shutdown() on exit.

    using namespace llvm;
    InitLLVM X(argc, argv);

    // Initialize targets and assembly printers/parsers.
    llvm::InitializeAllTargetInfos();
    llvm::InitializeAllTargetMCs();
    llvm::InitializeAllDisassemblers();

    // Register the target printer for --version.

```

(continues on next page)

(continued from previous page)

```

cl::AddExtraVersionPrinter(TargetRegistry::printRegisteredTargetsForVersion);

cl::ParseCommandLineOptions(argc, argv, "llvm object file dumper\n");
// TripleName = Triple::normalize(TripleName);

ToolName = argv[0];

// Defaults to a.out if no filenames specified.
if (InputFilenames.size() == 0)
    InputFilenames.push_back("a.out");

std::for_each(InputFilenames.begin(), InputFilenames.end(),
              DumpInput);

return EXIT_SUCCESS;
}

```

In order to support command, **llvm-objdump -d** and **llvm-objdump -t**, for Cpu0, the code add to **llvm-objdump.cpp** as follows,

**exlbt/llvm-objdump/llvm-objdump.cpp**

```
case ELF::EM_CPU0: //Cpu0
```

## 2.2 Create Cpu0 backend under LLD

### 2.2.1 LLD introduction

In general, linker do the Relocation Records Resolve as Chapter ELF support depicted, and optimization for those cannot finish in compiler stage. One of the optimization opportunities in linker is Dead Code Stripping which is explained as follows,

**Dead code stripping - example (modified from llvm lto document web)**

**a.h**

```

extern int foo1(void);
extern void foo2(void);
extern int foo4(void);

```

**a.cpp**

```
#include "a.h"

static signed int i = 0;

void foo2(void) {
    i = -1;
}

static int foo3() {
    return (10+foo4());
}

int foo1(void) {
    int data = 0;

    if (i < 0)
        data = foo3();

    data = data + 42;
    return data;
}
```

**ch13\_1.cpp**

```
#include "a.h"

void ISR() {
    asm("ISR:");
    return;
}

int foo4(void) {
    return 5;
}

int main() {
    return foo1();
}
```

Above code can be reduced to [Fig. 2.2](#) to perform mark and swip in graph for Dead Code Stripping.

As above example, the foo2() is an isolated node without any reference. It's dead code and can be removed in linker optimization. We test this example by build-ch13\_1.sh and find foo2() cannot be removed. There are two possibilities for this situation. One is we do not trigger lld dead code stripping optimization in command (the default is not do it). The other is lld hasn't implemented it yet at this point. It's reasonable since the lld is in its early stages of development. We didn't dig it more, since the Cpu0 backend tutorial just need a linker to finish Relocation Records Resolve and see how it runs on PC.

Remind, llvm-linker is the linker works on IR level linker optimization. Sometime when you got the obj file only (if

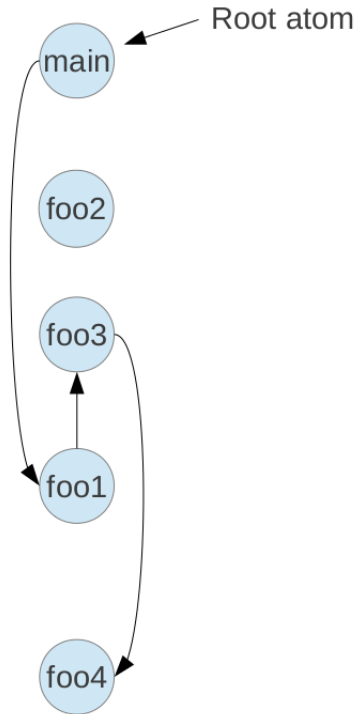


Fig. 2.2: Atom classified (from lld web)

you have a.o in this case), the native linker (such as lld) have the opportunity to do Dead Code Stripping while the IR linker hasn't.

## 2.2.2 Static linker

Let's run the static linker first and explain it next.

File printf-stdarg.c come from internet download which is GPL2 license. GPL2 is more restricted than LLVM license. File printf-stdarg-1.c is the file for testing the printf() function which implemented on PC OS platform. Let's run printf-stdarg-2.cpp on Cpu0 and compare it against the result of PC's printf() as below.

### exlbt/input/printf-stdarg-1.c

```

/*
Copyright 2001, 2002 Georges Menie (www.menie.org)
stdarg version contributed by Christian Ettinger

This program is free software; you can redistribute it and/or modify
it under the terms of the GNU Lesser General Public License as published by
the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the

```

(continues on next page)

(continued from previous page)

```

GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
*/

/*
putchar is the only external dependency for this file,
if you have a working putchar, leave it commented out.
If not, uncomment the define below and
replace outbyte(c) by your own function call.

#define putchar(c) outbyte(c)
*/

// gcc printf-stdarg-1.c
// ./a.out

#include <stdio.h>

#define TEST_PRINTF

#ifdef TEST_PRINTF
int main(void)
{
    char *ptr = "Hello world!";
    char *np = 0;
    int i = 5;
    unsigned int bs = sizeof(int)*8;
    int mi;
    char buf[80];

    mi = (1 << (bs-1)) + 1;
    printf("%s\n", ptr);
    printf("printf test\n");
    printf("%s is null pointer\n", np);
    printf("%d = 5\n", i);
    printf("%d = - max int\n", mi);
    printf("char %c = 'a'\n", 'a');
    printf("hex %x = ff\n", 0xff);
    printf("hex %02x = 00\n", 0);
    printf("signed %d = unsigned %u = hex %x\n", -3, -3, -3);
    printf("%d %s(s)%", 0, "message");
    printf("\n");
    printf("%d %s(s) with %%\n", 0, "message");
    sprintf(buf, "justif: \"%-10s\"\n", "left"); printf("%s", buf);
    sprintf(buf, "justif: \"%10s\"\n", "right"); printf("%s", buf);
    sprintf(buf, " 3: %04d zero padded\n", 3); printf("%s", buf);
    sprintf(buf, " 3: %-4d left justif.\n", 3); printf("%s", buf);
    sprintf(buf, " 3: %4d right justif.\n", 3); printf("%s", buf);
    sprintf(buf, "-3: %04d zero padded\n", -3); printf("%s", buf);

```

(continues on next page)

(continued from previous page)

```

    sprintf(buf, "-3: %-4d left justif.\n", -3); printf("%s", buf);
    sprintf(buf, "-3: %4d right justif.\n", -3); printf("%s", buf);

    return 0;
}

/*
 * if you compile this file with
 * gcc -Wall $(YOUR_C_OPTIONS) -DTEST_PRINTF -c printf.c
 * you will get a normal warning:
 * printf.c:214: warning: spurious trailing '%' in format
 * this line is testing an invalid % at the end of the format string.
 *
 * this should display (on 32bit int machine) :
 *
 * Hello world!
 * printf test
 * (null) is null pointer
 * 5 = 5
 * -2147483647 = - max int
 * char a = 'a'
 * hex ff = ff
 * hex 00 = 00
 * signed -3 = unsigned 4294967293 = hex ffffffff
 * 0 message(s)
 * 0 message(s) with %
 * justif: "left      "
 * justif: "      right"
 * 3: 0003 zero padded
 * 3: 3    left justif.
 * 3:    3 right justif.
 * -3: -003 zero padded
 * -3: -3   left justif.
 * -3:   -3 right justif.
 */
#endif

```

**exlbt/input/printf-stdarg-2.cpp**

```

#include "debug.h"
#include "print.h"

#define TEST_PRINTF

extern "C" int putchar(int c);

extern "C" {
#include "printf-stdarg.c"
}

```

**exlbt/input/printf-stdarg-def.c**

```
#include "print.h"

// Definition putchar(int c) for printf-stdarg.c
// For memory IO
int putchar(int c)
{
    char *p = (char*)OUT_MEM;
    *p = c;

    return 0;
}
```

**exlbt/input/printf-stdarg.c**

```
/*
Copyright 2001, 2002 Georges Menie (www.menie.org)
stdarg version contributed by Christian Ettinger

    This program is free software; you can redistribute it and/or modify
    it under the terms of the GNU Lesser General Public License as published by
    the Free Software Foundation; either version 2 of the License, or
    (at your option) any later version.

    This program is distributed in the hope that it will be useful,
    but WITHOUT ANY WARRANTY; without even the implied warranty of
    MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
    GNU Lesser General Public License for more details.

    You should have received a copy of the GNU Lesser General Public License
    along with this program; if not, write to the Free Software
    Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
*/

/*
putchar is the only external dependency for this file,
if you have a working putchar, leave it commented out.
If not, uncomment the define below and
replace outbyte(c) by your own function call.

#define putchar(c) outbyte(c)
*/

#include <stdarg.h>

static void printchar(char **str, int c)
{
    extern int putchar(int c);
```

(continues on next page)



(continued from previous page)

```

    if (str) {
        **str = c;
        ++(*str);
    }
    else (void)putchar(c);
}

#define PAD_RIGHT 1
#define PAD_ZERO 2

static int prints(char **out, const char *string, int width, int pad)
{
    register int pc = 0, padchar = ' ';

    if (width > 0) {
        register int len = 0;
        register const char *ptr;
        for (ptr = string; *ptr; ++ptr) ++len;
        if (len >= width) width = 0;
        else width -= len;
        if (pad & PAD_ZERO) padchar = '0';
    }
    if (!(pad & PAD_RIGHT)) {
        for ( ; width > 0; --width) {
            printchar (out, padchar);
            ++pc;
        }
    }
    for ( ; *string ; ++string) {
        printchar (out, *string);
        ++pc;
    }
    for ( ; width > 0; --width) {
        printchar (out, padchar);
        ++pc;
    }

    return pc;
}

/* the following should be enough for 32 bit int */
#define PRINT_BUF_LEN 12

static int printi(char **out, int i, int b, int sg, int width, int pad, int letbase)
{
    char print_buf[PRINT_BUF_LEN];
    register char *s;
    register int t, neg = 0, pc = 0;
    register unsigned int u = i;

    if (i == 0) {
        print_buf[0] = '0';

```

(continues on next page)

(continued from previous page)

```

    print_buf[1] = '\0';
    return prints (out, print_buf, width, pad);
}

if (sg && b == 10 && i < 0) {
    neg = 1;
    u = -i;
}

s = print_buf + PRINT_BUF_LEN-1;
*s = '\0';

while (u) {
    t = u % b;
    if( t >= 10 )
        t += letbase - '0' - 10;
    *--s = t + '0';
    u /= b;
}

if (neg) {
    if( width && (pad & PAD_ZERO) ) {
        printchar (out, '-');
        ++pc;
        --width;
    }
    else {
        *--s = '-';
    }
}

return pc + prints (out, s, width, pad);
}

static int print(char **out, const char *format, va_list args )
{
    register int width, pad;
    register int pc = 0;
    char scr[2];

    for (; *format != 0; ++format) {
        if (*format == '%') {
            ++format;
            width = pad = 0;
            if (*format == '\0') break;
            if (*format == '%') goto out;
            if (*format == '-') {
                ++format;
                pad = PAD_RIGHT;
            }
            while (*format == '0') {
                ++format;
            }

```

(continues on next page)

(continued from previous page)

```

    pad |= PAD_ZERO;
}
for ( ; *format >= '0' && *format <= '9'; ++format) {
    width *= 10;
    width += *format - '0';
}
if( *format == 's' ) {
    register char *s = (char *)va_arg( args, int );
    pc += prints (out, s?s:"(null)", width, pad);
    continue;
}
if( *format == 'd' ) {
    pc += printi (out, va_arg( args, int ), 10, 1, width, pad, 'a');
    continue;
}
if( *format == 'x' ) {
    pc += printi (out, va_arg( args, int ), 16, 0, width, pad, 'a');
    continue;
}
if( *format == 'X' ) {
    pc += printi (out, va_arg( args, int ), 16, 0, width, pad, 'A');
    continue;
}
if( *format == 'u' ) {
    pc += printi (out, va_arg( args, int ), 10, 0, width, pad, 'a');
    continue;
}
if( *format == 'c' ) {
    /* char are converted to int then pushed on the stack */
    scr[0] = (char)va_arg( args, int );
    scr[1] = '\0';
    pc += prints (out, scr, width, pad);
    continue;
}
}
else {
out:
    printchar (out, *format);
    ++pc;
}
}
if (out) **out = '\0';
va_end( args );
return pc;
}

int printf(const char *format, ...)
{
    va_list args;

    va_start( args, format );
    return print( 0, format, args );
}

```

(continues on next page)

(continued from previous page)

```

}

int sprintf(char *out, const char *format, ...)
{
    va_list args;

    va_start( args, format );
    return print( &out, format, args );
}

#ifdef TEST_PRINTF
int main(void)
{
    char *ptr = "Hello world!";
    char *np = 0;
    int i = 5;
    unsigned int bs = sizeof(int)*8;
    int mi;
    char buf[80];

    mi = (1 << (bs-1)) + 1;
    printf("%s\n", ptr);
    printf("printf test\n");
    printf("%s is null pointer\n", np);
    printf("%d = 5\n", i);
    printf("%d = - max int\n", mi);
    printf("char %c = 'a'\n", 'a');
    printf("hex %x = ff\n", 0xff);
    printf("hex %02x = 00\n", 0);
    printf("signed %d = unsigned %u = hex %x\n", -3, -3, -3);
    printf("%d %s(s)%", 0, "message");
    printf("\n");
    printf("%d %s(s) with %%\n", 0, "message");
    sprintf(buf, "justif: \"%-10s\"\n", "left"); printf("%s", buf);
    sprintf(buf, "justif: \"%10s\"\n", "right"); printf("%s", buf);
    sprintf(buf, " 3: %04d zero padded\n", 3); printf("%s", buf);
    sprintf(buf, " 3: %-4d left justif.\n", 3); printf("%s", buf);
    sprintf(buf, " 3: %4d right justif.\n", 3); printf("%s", buf);
    sprintf(buf, "-3: %04d zero padded\n", -3); printf("%s", buf);
    sprintf(buf, "-3: %-4d left justif.\n", -3); printf("%s", buf);
    sprintf(buf, "-3: %4d right justif.\n", -3); printf("%s", buf);

    return 0;
}

/*
 * if you compile this file with
 * gcc -Wall $(YOUR_C_OPTIONS) -DTEST_PRINTF -c printf.c
 * you will get a normal warning:
 * printf.c:214: warning: spurious trailing '%' in format
 * this line is testing an invalid % at the end of the format string.
 */

```

(continues on next page)

(continued from previous page)

```

* this should display (on 32bit int machine) :
*
* Hello world!
* printf test
* (null) is null pointer
* 5 = 5
* -2147483647 = - max int
* char a = 'a'
* hex ff = ff
* hex 00 = 00
* signed -3 = unsigned 4294967293 = hex ffffffff
* 0 message(s)
* 0 message(s) with %
* justif: "left      "
* justif: "      right"
* 3: 0003 zero padded
* 3: 3    left justif.
* 3:    3 right justif.
* -3: -003 zero padded
* -3: -3   left justif.
* -3:   -3 right justif.
*/

#endif

```

**exlbt/input/start.cpp**

```

#include "dynamic_linker.h"
#include "start.h"

extern int main();

// Real entry (first instruction) is from cpu0BootAtomContent of
// Cpu0RelocationPass.cpp jump to asm("start:") of start.cpp.
void start() {
    asm("start:");

    asm("lui $sp, 0x7");
    asm("addiu $sp, $sp, 0xfffc");
    int *gpaddr;
    gpaddr = (int*)GPADDR;
    __asm__ __volatile__ ("ld  $gp, %0"
                          : // no output register, specify output register to $gp
                          : "m"(*gpaddr)
                          );

    initRegs();
    main();
    asm("addiu $lr, $ZERO, -1");
    asm("ret $lr");
}

```

(continues on next page)

(continued from previous page)

```
}
```

## exlbt/input/lib\_cpu0.ll

```
; The @_start() exist to prevent lld linker error.
; Real entry (first instruction) is from cpu0BootAtomContent of
; Cpu0RelocationPass.cpp jump to asm("start:") of start.cpp.
define void @_start() nounwind {
entry:
    ret void
}

define void @__start() nounwind {
entry:
    ret void
}

define void @__stack_chk_fail() nounwind {
entry:
    ret void
}

define void @__stack_chk_guard() nounwind {
entry:
    ret void
}

define void @_ZdlPv() nounwind {
entry:
    ret void
}

define void @__dso_handle() nounwind {
entry:
    ret void
}

define void @_ZNSt8ios_base4InitC1Ev() nounwind {
entry:
    ret void
}

define void @__cxa_atexit() nounwind {
entry:
    ret void
}

define void @_ZTVN10__cxxabiv120__si_class_type_infoE() nounwind {
entry:
```

(continues on next page)

(continued from previous page)

```

    ret void
}

define void @_ZTVN10__cxxabiv117__class_type_infoE() nounwind {
entry:
    ret void
}

define void @_Znwm() nounwind {
entry:
    ret void
}

define void @__cxa_pure_virtual() nounwind {
entry:
    ret void
}

define void @_ZNSt8ios_base4InitD1Ev() nounwind {
entry:
    ret void
}

```

**exlbt/input/functions.sh**

```

prologue() {
    LBDEXDIR=../../lbdex

    if [ $argNum == 0 ]; then
        echo "usage: bash $sh_name cpu_type endian"
        echo "  cpu_type: cpu032I or cpu032II"
        echo "  endian: be (big endian, default) or le (little endian)"
        echo "for example:"
        echo "  bash build-slinker.sh cpu032I be"
        exit 1;
    fi

    if [ $arg1 != cpu032I ] && [ $arg1 != cpu032II ]; then
        echo "1st argument is cpu032I or cpu032II"
        exit 1
    fi

    INCDIR=../../lbdex/input
    OS=`uname -s`
    echo "OS =" ${OS}

    TOOLDIR=~/.llvm/test/build/bin
    CLANG=~/.llvm/test/build/bin/clang

    CPU=$arg1

```

(continues on next page)

(continued from previous page)

```
echo "CPU =" "${CPU}"

if [ "$arg2" != "" ] && [ $arg2 != le ] && [ $arg2 != be ]; then
    echo "2nd argument is be (big endian, default) or le (little endian)"
    exit 1
fi
if [ "$arg2" == "" ] || [ $arg2 == be ]; then
    endian=
else
    endian=el
fi
echo "endian =" "${endian}"

bash clean.sh
}

isLittleEndian() {
    echo "endian = " "$endian"
    if [ "$endian" == "LittleEndian" ] ; then
        le="true"
    elif [ "$endian" == "BigEndian" ] ; then
        le="false"
    else
        echo "!endian unknown"
        exit 1
    fi
}

elf2hex() {
    ${TOOLDIR}/elf2hex -le=${le} a.out > ${LBDEDIR}/verilog/cpu0.hex
    if [ ${le} == "true" ] ; then
        echo "1 /* 0: big endian, 1: little endian */" > ${LBDEDIR}/verilog/cpu0.config
    else
        echo "0 /* 0: big endian, 1: little endian */" > ${LBDEDIR}/verilog/cpu0.config
    fi
    cat ${LBDEDIR}/verilog/cpu0.config
}

epilogue() {
    endian=`${TOOLDIR}/llvm-readobj -h a.out|grep "DataEncoding"|awk '{print $2}'`
    isLittleEndian;
    elf2hex;
}
```



**exlbt/input/build-printf-stdarg-2.sh**

```
#!/usr/bin/env bash

source functions.sh

sh_name=build-printf-stdarg-2.sh
argNum=$((#))
arg1=$1
arg2=$2

prologue;

${CLANG} -target mips-unknown-linux-gnu -c start.cpp -emit-llvm -o start.bc
${CLANG} -target mips-unknown-linux-gnu -c debug.cpp -emit-llvm -o debug.bc
${CLANG} -target mips-unknown-linux-gnu -c printf-stdarg-def.c -emit-llvm \
-o printf-stdarg-def.bc
${CLANG} -target mips-unknown-linux-gnu -c printf-stdarg-2.cpp -emit-llvm -o \
printf-stdarg-2.bc
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj start.bc -o start.cpu0.o
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj debug.bc -o debug.cpu0.o
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj printf-stdarg-def.bc -o printf-stdarg-def.cpu0.o
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj printf-stdarg-2.bc -o printf-stdarg-2.cpu0.o
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj lib_cpu0.ll -o lib_cpu0.o
${TOOLDIR}/lld -flavor gnu \
start.cpu0.o debug.cpu0.o printf-stdarg-def.cpu0.o printf-stdarg-2.cpu0.o \
lib_cpu0.o -o a.out

epilogue;
```

The build-printf-stdarg-2.sh is for my PC setting. Please change this script to the directory of your llvm/lld setting. After that run static linker example code as follows,

```
1-160-136-173:input Jonathan$ pwd
/Users/Jonathan/Downloads/exlbt/input
1-160-136-173:input Jonathan$ bash build-printf-stdarg-2.sh cpu032I be
In file included from printf-stdarg-2.cpp:11:
./printf-stdarg.c:206:15: warning: conversion from string literal to 'char *'
is deprecated [-Wdeprecated-writable-strings]
    char *ptr = "Hello world!";
                ^
1 warning generated.

1-160-136-173:input Jonathan$ cd ../../lbdex/verilog/
1-160-136-173:verilog Jonathan$ pwd
/Users/Jonathan/Download/lbdex/verilog
1-160-136-173:verilog Jonathan$ make
```

(continues on next page)

(continued from previous page)

```
1-160-136-173:verilog Jonathan$ ls
... cpu0Is ... cpu0IIs ...
1-160-136-173:verilog Jonathan$ ./cpu0Is
Hello world!
printf test
(null) is null pointer
5 = 5
-2147483647 = - max int
char a = 'a'
hex ff = ff
hex 00 = 00
signed -3 = unsigned 4294967293 = hex ffffffff
0 message(s)
0 message(s) with \%
justif: "left      "
justif: "      right"
 3: 0003 zero padded
 3: 3   left justif.
 3:   3 right justif.
-3: -003 zero padded
```

Let's check the result with PC program printf-stdarg-1.c output as follows,

```
1-160-136-173:input Jonathan$ clang printf-stdarg-1.c
printf-stdarg-1.c:58:19: warning: incomplete format specifier [-Wformat]
    printf("%d %s(s)%", 0, "message");
                      ^
1 warning generated.
1-160-136-173:input Jonathan$ ./a.out
Hello world!
printf test
(null) is null pointer
5 = 5
-2147483647 = - max int
char a = 'a'
hex ff = ff
hex 00 = 00
signed -3 = unsigned 4294967293 = hex ffffffff
0 message(s)
0 message(s) with \%
justif: "left      "
justif: "      right"
 3: 0003 zero padded
 3: 3   left justif.
 3:   3 right justif.
-3: -003 zero padded
-3: -3   left justif.
-3:  -3 right justif.
```

They are same. You can verify the slt instructions is work fine too by change variable cpu from cpu032I to cpu032II as follows,

**exlbt/input/build-printf-stdarg-2.sh**

```

1-160-136-173:verilog Jonathan$ pwd
/Users/Jonathan/Download/lbdex/verilog
1-160-136-173:verilog Jonathan$ cd ../../exlbt/input
1-160-136-173:input Jonathan$ pwd
/Users/Jonathan/Download/exlbt/input
1-160-136-173:input Jonathan$ bash build-printf-stdarg-2.sh cpu032II be
...
1-160-136-173:input Jonathan$ cd ../lbdex/verilog/
1-160-136-173:verilog Jonathan$ ./cpu0IIs

```

The verilog machine cpu0IIs include all instructions of cpu032I and add slt, beq, ..., instructions. Run build-printf-stdarg-2.sh with cpu=cpu032II will generate slt, beq and bne instructions instead of cmp, jeq, ... instructions.

With the printf() of GPL source code, we can program more test code with it to verify the previous llvm Cpu0 backend generated program. The following code is for this purpose.

**exlbt/input/debug.cpp**

```

#include "debug.h"

extern "C" int printf(const char *format, ...);

// With read variable form asm, such as sw in this example, the function,
// ISR_Handler() must entry from beginning. The ISR() enter from "ISR:" will
// has incorrect value for reload instruction in offset.
// For example, the correct one is:
//  "addiu $sp, $sp, -12"
//  "mov $fp, $sp"
// ISR:
//  "ld $2, 32($fp)"
// Go to ISR directly, then the $fp is 12+ than original, then it will get
//  "ld $2, 20($fp)" actually.
void ISR_Handler() {
    SAVE_REGISTERS;
    asm("lui $7, 0xffff");
    asm("ori $7, $7, 0xfdf");
    asm("and $sw, $sw, $7"); // clear `IE

    volatile int sw;
    __asm__ __volatile__ ("addiu %0, $sw, 0"
                          : "=r"(sw)
                          );
    int interrupt = (sw & INT);
    int softint = (sw & SOFTWARE_INT);
    int overflow = (sw & OVERFLOW);
    int int1 = (sw & INT1);
    int int2 = (sw & INT2);
    if (interrupt) {
        if (softint) {
            if (overflow) {

```

(continues on next page)

(continued from previous page)

```

        printf("Overflow exception\n");
        CLEAR_OVERFLOW;
    }
    else {
        printf("Software interrupt\n");
    }
    CLEAR_SOFTWARE_INT;
}
else if (int1) {
    printf("Harware interrupt 0\n");
    asm("lui $7, 0xffff");
    asm("ori $7, $7, 0x7fff");
    asm("and $sw, $sw, $7");
}
else if (int2) {
    printf("Harware interrupt 1\n");
    asm("lui $7, 0xfffe");
    asm("ori $7, $7, 0xffff");
    asm("and $sw, $sw, $7");
}
asm("lui $7, 0xffff");
asm("ori $7, $7, 0xdfff");
asm("and $sw, $sw, $7"); // clear `I
}
asm("ori $sw, $sw, 0x200"); // int enable
RESTORE_REGISTERS;
return;
}

void ISR() {
    asm("ISR:");
    asm("lui $at, 7");
    asm("ori $at, $at, 0xff00");
    asm("st $14, 48($at)");
    ISR_Handler();
    asm("lui $at, 7");
    asm("ori $at, $at, 0xff00");
    asm("ld $14, 48($at)");
    asm("c0mov $pc, $epc");
}

void int_sim() {
    asm("ori $sw, $sw, 0x200"); // int enable
    asm("ori $sw, $sw, 0x2000"); // set interrupt
    asm("ori $sw, $sw, 0x4000"); // Software interrupt
    asm("ori $sw, $sw, 0x200"); // int enable
    asm("ori $sw, $sw, 0x2000"); // set interrupt
    asm("ori $sw, $sw, 0x8000"); // hardware interrupt 0
    asm("ori $sw, $sw, 0x200"); // int enable
    asm("ori $sw, $sw, 0x2000"); // set interrupt
    asm("lui $at, 1");
    asm("or $sw, $sw, $at"); // hardware interrupt 1

```

(continues on next page)

(continued from previous page)

```

    return;
}

```

**exlbt/input/ch\_ild\_staticlink.h**

```

#include "debug.h"
#include "print.h"

// #define PRINT_TEST

extern "C" int printf(const char *format, ...);
extern "C" int sprintf(char *out, const char *format, ...);

extern unsigned char sBuffer[4];
extern int test_overflow();
extern int test_add_overflow();
extern int test_sub_overflow();
extern int test_ctrl2();
extern int test_phinode(int a, int b, int c);
extern int test_blockaddress(int x);
extern int test_longbranch();
extern int test_func_arg_struct();
extern int test_tailcall(int a);
extern bool exception0ccur;
extern int test_detect_exception(bool exception);

extern int test_staticlink();

```

**exlbt/input/ch\_ild\_staticlink.cpp**

```

void verify_test_ctrl2()
{
    int a = -1;
    int b = -1;
    int c = -1;
    int d = -1;

    sBuffer[0] = (unsigned char)0x35;
    sBuffer[1] = (unsigned char)0x35;
    a = test_ctrl2();
    sBuffer[0] = (unsigned char)0x30;
    sBuffer[1] = (unsigned char)0x29;
    b = test_ctrl2();
    sBuffer[0] = (unsigned char)0x35;
    sBuffer[1] = (unsigned char)0x35;
    c = test_ctrl2();
    sBuffer[0] = (unsigned char)0x34;

```

(continues on next page)

(continued from previous page)

```
d = test_ctrl2();
printf("test_ctrl2(): a = %d, b = %d, c = %d, d = %d", a, b, c, d);
if (a == 1 && b == 0 && c == 1 && d == 0)
    printf(", PASS\n");
else
    printf(", FAIL\n");

return;
}

int test_staticlink()
{
    int a = 0;

    a = test_add_overflow();
    a = test_sub_overflow();
    a = test_global(); // gI = 100
    printf("global variable gI = %d", a);
    if (a == 100)
        printf(", PASS\n");
    else
        printf(", FAIL\n");
    verify_test_ctrl2();
    a = test_phinode(3, 1, 0);
    printf("test_phinode(3, 1) = %d", a); // a = 3
    if (a == 3)
        printf(", PASS\n");
    else
        printf(", FAIL\n");
    a = test_blockaddress(1);
    printf("test_blockaddress(1) = %d", a); // a = 1
    if (a == 1)
        printf(", PASS\n");
    else
        printf(", FAIL\n");
    a = test_blockaddress(2);
    printf("test_blockaddress(2) = %d", a); // a = 2
    if (a == 2)
        printf(", PASS\n");
    else
        printf(", FAIL\n");
    a = test_longbranch();
    printf("test_longbranch() = %d", a); // a = 0
    if (a == 0)
        printf(", PASS\n");
    else
        printf(", FAIL\n");
    a = test_func_arg_struct();
    printf("test_func_arg_struct() = %d", a); // a = 0
    if (a == 0)
        printf(", PASS\n");
    else
```

(continues on next page)

(continued from previous page)

```

    printf(", FAIL\n");
a = test_constructor();
printf("test_constructor() = %d", a); // a = 0
if (a == 0)
    printf(", PASS\n");
else
    printf(", FAIL\n");
a = test_template();
printf("test_template() = %d", a); // a = 15
if (a == 15)
    printf(", PASS\n");
else
    printf(", FAIL\n");
a = test_tailcall(5);
printf("test_tailcall(5) = %d", a); // a = 15
if (a == 120)
    printf(", PASS\n");
else
    printf(", FAIL\n");
test_detect_exception(true);
printf("exceptionOccur= %d", exceptionOccur);
if (exceptionOccur)
    printf(", PASS\n");
else
    printf(", FAIL\n");
test_detect_exception(false);
printf("exceptionOccur= %d", exceptionOccur);
if (!exceptionOccur)
    printf(", PASS\n");
else
    printf(", FAIL\n");
a = inlineasm_global(); // 4
printf("inlineasm_global() = %d", a); // a = 4
if (a == 4)
    printf(", PASS\n");
else
    printf(", FAIL\n");
a = test_cpp_polymorphism();
printf("test_cpp_polymorphism() = %d", a); // a = 0
if (a == 0)
    printf(", PASS\n");
else
    printf(", FAIL\n");

int_sim();

return 0;
}

```

**exlbt/input/ch\_slinker.cpp**

```
#include "ch_nolld.h"
#include "ch_lld_staticlink.h"

int main()
{
    bool pass = true;
    pass = test_nolld();
    if (pass)
        printf("test_nolld(): PASS\n");
    else
        printf("test_nolld(): FAIL\n");
    pass = true;
    pass = test_staticlink();

    return pass;
}

#include "ch_nolld.cpp"
#include "ch_lld_staticlink.cpp"
```

**exlbt/input/build-slinker.sh**

```
#!/usr/bin/env bash

source functions.sh

sh_name=build-slinker.sh
argNum=$((#))
arg1=$1
arg2=$2

prologue;

${CLANG} -target mips-unknown-linux-gnu -c start.cpp -emit-llvm -o \
start.bc
${CLANG} -target mips-unknown-linux-gnu -c debug.cpp -emit-llvm -o \
debug.bc
${CLANG} -target mips-unknown-linux-gnu -c printf-stdarg-def.c \
-emit-llvm -o printf-stdarg-def.bc
${CLANG} -target mips-unknown-linux-gnu -c printf-stdarg.c -emit-llvm \
-o printf-stdarg.bc
${CLANG} -target mips-unknown-linux-gnu -c \
${LBDEXDIR}/input/ch4_1_addsuboverflow.cpp -emit-llvm -o ch4_1_addsuboverflow.bc
${CLANG} -target mips-unknown-linux-gnu -c \
${LBDEXDIR}/input/ch8_1_br_jt.cpp -emit-llvm -o ch8_1_br_jt.bc
${CLANG} -O3 -target mips-unknown-linux-gnu -c \
${LBDEXDIR}/input/ch8_2_phinode.cpp -emit-llvm -o ch8_2_phinode.bc
${CLANG} -target mips-unknown-linux-gnu -c \
```

(continues on next page)



(continued from previous page)

```

${LBDEXXDIR}/input/ch8_1_blockaddr.cpp -emit-llvm -o ch8_1_blockaddr.bc
${CLANG} -target mips-unknown-linux-gnu -c \
${LBDEXXDIR}/input/ch8_2_longbranch.cpp -emit-llvm -o ch8_2_longbranch.bc
${CLANG} -O1 -target mips-unknown-linux-gnu -c \
${LBDEXXDIR}/input/ch9_2_tailcall.cpp -emit-llvm -o ch9_2_tailcall.bc
${CLANG} -target mips-unknown-linux-gnu -c \
${LBDEXXDIR}/input/ch9_3_detect_exception.cpp -emit-llvm -o \
ch9_3_detect_exception.bc
${CLANG} -I${LBDEXXDIR}/input/ -target mips-unknown-linux-gnu -c \
ch_slinker.cpp -emit-llvm -o ch_slinker.bc
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-lld=true start.bc -o start.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-lld=true debug.bc -o debug.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-lld=true printf-stdarg-def.bc -o printf-stdarg-def.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj printf-stdarg.bc -o printf-stdarg.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-lld=true -cpu0-enable-overflow=true ch4_1_addsuboverflow.bc -o \
ch4_1_addsuboverflow.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-lld=true ch8_1_br_jt.bc -o ch8_1_br_jt.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj ch8_2_phinode.bc -o ch8_2_phinode.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-lld=true ch8_1_blockaddr.bc -o ch8_1_blockaddr.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=pic \
-filetype=obj -has-lld=true -force-cpu0-long-branch ch8_2_longbranch.bc -o \
ch8_2_longbranch.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-lld=true -enable-cpu0-tail-calls ch9_2_tailcall.bc -o ch9_2_tailcall.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-lld=true ch9_3_detect_exception.bc -o ch9_3_detect_exception.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-lld=true ch_slinker.bc -o ch_slinker.o
${TOOLDIR}/lld -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-lld=true lib_cpu0.ll -o lib_cpu0.o
${TOOLDIR}/lld -flavor gnu start.o \
debug.o printf-stdarg-def.o printf-stdarg.o ch4_1_addsuboverflow.o \
ch8_1_br_jt.o ch8_2_phinode.o ch8_1_blockaddr.o ch8_2_longbranch.o \
ch9_2_tailcall.o ch9_3_detect_exception.o ch_slinker.o lib_cpu0.o -o a.out

epilogue;

```

```

1-160-136-173:input Jonathan$ pwd
/Users/Jonathan/Downloads/exlbt/input
114-37-148-111:input Jonathan$ bash build-slinker.sh cpu032I le
...
In file included from ch_slinker.cpp:23:
./ch_lld_staticlink.cpp:8:15: warning: conversion from string literal to

```

(continues on next page)

(continued from previous page)

```
'char *' is deprecated
  [-Wdeprecated-writable-strings]
  char *ptr = "Hello world!";
      ^
1 warning generated.
114-37-148-111:input Jonathan$ cd ../../lbdex/verilog/
114-37-148-111:verilog Jonathan$ ./cpu0IIs
WARNING: ./cpu0.v:369: $readmemh(cpu0.hex): Not enough words in the file for
the requested range [0:524287].
taskInterrupt(001)
...
test_nolld(): PASS
taskInterrupt(011)
Overflow exception
taskInterrupt(011)
Overflow exception
test_overflow = 0, PASS
global variable gI = 100, PASS
test_ctrl2(): a = 1, b = 0, c = 1, d = 0, PASS
test_phinode(3, 1) = 3, PASS
test_blockaddress(1) = 1, PASS
test_blockaddress(2) = 2, PASS
date1 = 2012 10 12 1 2 3, PASS
date2 = 2012 10 12 1 2 3, PASS
time2 = 1 10 12, PASS
time3 = 1 10 12, PASS
date1 = 2013 1 26 12 21 10, PASS
date2 = 2013 1 26 12 21 10, PASS
test_template() = 15, PASS
test_alloc() = 31, PASS
exceptionOccur= 1, PASS
exceptionOccur= 0, PASS
inlineasm_global() = 4, PASS
20
10
5
test_cpp_polymorphism() = 0, PASS
taskInterrupt(011)
Software interrupt
taskInterrupt(011)
Hardware interrupt 0
taskInterrupt(011)
Hardware interrupt 1
...
```

As above, by taking the open source code advantage, Cpu0 got the more stable printf() program. Once Cpu0 backend can translate the printf() function of the open source C printf() program into machine instructions, the llvm Cpu0 backend can be verified with printf(). With the quality code of open source printf() program, the Cpu0 toolchain is extended from compiler backend to C std library support. (Notice that some GPL open source code are not quality code, but some are.)

The “Overflow exception is printed twice meaning the ISR() of debug.cpp is called twice from ch4\_1\_2.cpp. The printed “taskInterrupt(001)” and “taskInterrupt(011)” just are trace message from cpu0.v code.

### 2.2.3 Dynamic linker

I remove dynamic linker demonstration from 3.9.0 because I don't know how to do it from lld 3.9 and this demonstration add lots of code in elf2hex, verilog and lld of Cpu0 backend. However it can be run with llvm 3.7 with the following command.

```
1-160-136-173:test Jonathan$ pwd
/Users/Jonathan/test
1-160-136-173:test Jonathan$ git clone https://github.com/Jonathan2251/lbd
1-160-136-173:test Jonathan$ git clone https://github.com/Jonathan2251/lbt
1-160-136-173:test Jonathan$ cd lbd
1-160-136-173:lbd Jonathan$ pwd
/Users/Jonathan/test/lbd
1-160-136-173:lbd Jonathan$ git checkout release_374
1-160-136-173:lbd Jonathan$ cd ../lbt
1-160-136-173:test Jonathan$ git checkout release_374
1-160-136-173:lbt Jonathan$ make html
```

Then reading this section in lld.html for it.

## 2.3 Summary

### 2.3.1 Create a new backend base on LLVM

Thanks the llvm open source project. To write a linker and ELF to Hex tools for a new CPU architecture is easy and reliable. Combined with the llvm Cpu0 backend code and Verilog language code programmed in previous chapters, we design a software toolchain to compile C/C++ code, link and run it on Verilog Cpu0 simulator without any real hardware investment. If you buy the FPGA development hardware, we believe these code can run on FPGA CPU even though we didn't do it. Extend system program toolchain to support a new CPU instruction set can be finished just like we have shown you at this point. School knowledges of system program, compiler, linker, loader, computer architecture and CPU design has been translated into a real work and see how it is running. Now, these school books knowledge is not limited on paper. We design it, program it, and run it on real world.

The total code size of llvm Cpu0 backend compiler, Cpu0 lld linker, elf2hex and Cpu0 Verilog Language is around 10 thousands lines of source code include comments. The total code size of clang, llvm and lld has 1000 thousands lines exclude the test and documents parts. It is only 1 % of the llvm size. More over, the llvm Cpu0 backend and lld Cpu0 backend are 70% of same with llvm Mips and lld X86\_64. Based on this truth, we believe llvm is a well defined structure in compiler architecture.

### 2.3.2 Contribute back to Open Source through working and learning

Finally, 10 thousands lines of source code in Cpu0 backend is very small in UI program. But it's quite complex in system program which based on llvm. We spent 600 pages of pdf to explain these code. Open source code give programmers best opportunity to understand the code and enhance/extend the code function. But it can be better, we believe the documentation is the next most important thing to improve the open source code development. The Open Source Organization recognized this point and set Open Source Document Project years ago<sup>7891011</sup>. Open Source grows up

<sup>7</sup> [http://en.wikipedia.org/wiki/BSD\\_Documentation\\_License](http://en.wikipedia.org/wiki/BSD_Documentation_License)

<sup>8</sup> <http://www.freebsd.org/docproj/>

<sup>9</sup> <http://www.freebsd.org/copyright/freebsd-doc-license.html>

<sup>10</sup> [http://en.wikipedia.org/wiki/GNU\\_Free\\_Documentation\\_License](http://en.wikipedia.org/wiki/GNU_Free_Documentation_License)

<sup>11</sup> <http://www.gnu.org/copyleft/fdl.html>

and becomes a giant software infrastructure with the forces of company<sup>1213</sup>, school research team and countless talent engineers passion. It terminated the situation of everyone trying to re-invent wheels during 10 years ago. Extend your software from the re-usable source code is the right way. Of course you should consider an open source license if you are working with business. Actually anyone can contribute back to open source through the learning process. This book is written through the process of learning llvm backend and contribute back to llvm open source project. We think this book cannot exists in traditional paper book form since only few number of readers interested in study llvm backend even though there are many paper published books in concept of compiler. So, this book is published via electric media form and try to match the Open Document License Expection<sup>14</sup>. There are distance between the concept and the realistic program implemenation. Keep note through learning a large complicate software such as this llvm backend is not enough. We all learned the knowledge through books during school and after school. So, if you cannot find a good way to produce documents, you can consider to write documents like this book. This book document uses sphinx tool just like the llvm development team. Sphinx uses restructured text format here<sup>151617</sup>. Appendix A of lbd book tell you how to install sphinx tool. Documentation work will help yourself to re-examine your software and make your program better in structure, reliability and more important “Extend your code to somewhere you didn’t expect”.

---

<sup>12</sup> <http://www.apple.com/opensource/>

<sup>13</sup> <https://www.ibm.com/developerworks/opensource/>

<sup>14</sup> <http://www.gnu.org/philosophy/free-doc.en.html>

<sup>15</sup> <http://docutils.sourceforge.net/docs/ref/rst/restructuredtext.html>

<sup>16</sup> <http://docutils.sourceforge.net/docs/ref/rst/directives.html>

<sup>17</sup> <http://docutils.sourceforge.net/rst.html>

## OPTIMIZATION

- *LLVM IR optimization*
- *Project*
  - *LLVM-VPO*

This chapter introduce llvm optimization.

### 3.1 LLVM IR optimization

The llvm-link provide optimizatoin in IR level which can apply in different programs developed by more than one language. Of course, it can apply in the same language which support seperate compile.

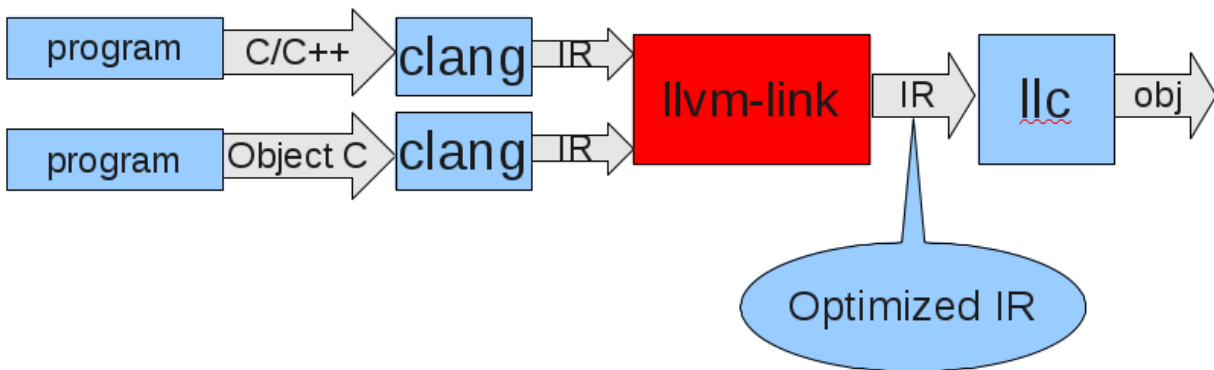


Fig. 3.1: llvm-link flow

Clang provide optimization options to do optimization from high level language to IR. But since many languages like C/C++ support separate compilation, it meaning there is no chance to do inter-procedure optimization if the functions come from different source files. To solve this problem, llvm provide **llvm-link** to link all \*.bc into a single IR file, and through **opt** to finish the inter-procedure optimization<sup>1</sup>. Beyond the DAG local optimization mentioned in Chapter 2, there are global optimization based on inter-procedure analysis<sup>2</sup>. The following steps and examples show this optimization solution in llvm.

<sup>1</sup> <http://www.cs.cmu.edu/afs/cs/academic/class/15745-s12/public/lectures/L3-LLVM-Part1.pdf>

<sup>2</sup> Refer chapter 9 of book Compilers: Principles, Techniques, and Tools (2nd Edition)

**exlbt/input/optimizen/1.cpp**

```
int callee(const int *a) {  
    return *a+1;  
}
```

**exlbt/input/optimize/2.cpp**

```
extern int callee(const int *X);  
  
int caller() {  
    int T;  
  
    T = 4;  
  
    return callee(&T);  
}
```

```
JonathantekiiMac:input Jonathan$ clang -O3 -target mips-unknown-linux-gnu  
-c 1.cpp -emit-llvm -o 1.bc  
JonathantekiiMac:input Jonathan$ clang -O3 -target mips-unknown-linux-gnu  
-c 2.cpp -emit-llvm -o 2.bc  
JonathantekiiMac:input Jonathan$ llvm-link -o=a.bc 1.bc 2.bc  
JonathantekiiMac:input Jonathan$ opt -O3 -o=a1.bc a.bc  
JonathantekiiMac:input Jonathan$ llvm-dis a.bc -o -  
...  
; Function Attrs: nounwind readonly  
define i32 @_Z6calleePKi(i32* nocapture readonly %a) #0 {  
    %1 = load i32* %a, align 4, !tbaa !1  
    %2 = add nsw i32 %1, 1  
    ret i32 %2  
}  
  
define i32 @_Z6callerv() #1 {  
    %T = alloca i32, align 4  
    store i32 4, i32* %T, align 4, !tbaa !1  
    %1 = call i32 @_Z6calleePKi(i32* %T)  
    ret i32 %1  
}  
...  
  
JonathantekiiMac:input Jonathan$ llvm-dis a1.bc -o -  
...  
; Function Attrs: nounwind readonly  
define i32 @_Z6calleePKi(i32* nocapture readonly %a) #0 {  
    %1 = load i32* %a, align 4, !tbaa !1  
    %2 = add nsw i32 %1, 1  
    ret i32 %2  
}
```

(continues on next page)

(continued from previous page)

```
; Function Attrs: nounwind readnone
define i32 @_Z6callerv() #1 {
    ret i32 5
}
...
```

From the result as above, the **opt** output has lesser number of IR instructions. Of course, the backend code will be more effective as follows,

```
JonathantekiiMac:input Jonathan$ ~/llvm/test/build/
bin/llc -march=cpu0 -relocation-model=pic -filetype=asm a.bc -o -
.section .mdebug.abi32
.previous
.file "a.bc"
.text
.globl      _Z6calleepKi
.align      2
.type _Z6calleepKi,@function
.ent _Z6calleepKi          # @_Z6calleepKi
_Z6calleepKi:
.frame      $sp,0,$lr
.mask       0x00000000,0
.set noreorder
.set nomacro
# BB#0:
ld    $2, 0($sp)
ld    $2, 0($2)
addiu $2, $2, 1
ret   $lr
.set macro
.set reorder
.end _Z6calleepKi
$tmp0:
.size _Z6calleepKi, ($tmp0)-_Z6calleepKi

.globl      _Z6callerv
.align      2
.type _Z6callerv,@function
.ent _Z6callerv          # @_Z6callerv
_Z6callerv:
.cfi_startproc
.frame      $sp,32,$lr
.mask       0x00004000,-4
.set noreorder
.cpload     $t9
.set nomacro
# BB#0:
addiu $sp, $sp, -32
$tmp3:
.cfi_def_cfa_offset 32
st     $lr, 28($sp)          # 4-byte Folded Spill
```

(continues on next page)

(continued from previous page)

```

$tmp4:
    .cfi_offset 14, -4
    .cpstore     8
    addiu $2, $zero, 4
    st    $2, 24($sp)
    addiu $2, $sp, 24
    st    $2, 0($sp)
    ld    $t9, %call16(_Z6calleePKi)($gp)
    jalr  $t9
    ld    $gp, 8($sp)
    ld    $lr, 28($sp)          # 4-byte Folded Reload
    addiu $sp, $sp, 32
    ret   $lr
    .set   macro
    .set   reorder
    .end   _Z6callerv

$tmp5:
    .size _Z6callerv, ($tmp5)-_Z6callerv
    .cfi_endproc

JonathantekiiMac:input Jonathan$ ~/llvm/test/build/
bin/llc -march=cpu0 -relocation-model=pic -filetype=asm a1.bc -o -
    .section .mdebug.abi32
    .previous
    .file "a1.bc"
    .text
    .globl      _Z6calleePKi
    .align      2
    .type _Z6calleePKi,@function
    .ent  _Z6calleePKi          # @_Z6calleePKi
_Z6calleePKi:
    .frame      $sp,0,$lr
    .mask       0x00000000,0
    .set  noreorder
    .set  nomacro
# BB#0:
    ld    $2, 0($sp)
    ld    $2, 0($2)
    addiu $2, $2, 1
    ret   $lr
    .set   macro
    .set   reorder
    .end   _Z6calleePKi

$tmp0:
    .size _Z6calleePKi, ($tmp0)-_Z6calleePKi

    .globl      _Z6callerv
    .align      2
    .type _Z6callerv,@function
    .ent  _Z6callerv          # @_Z6callerv
_Z6callerv:
    .frame      $sp,0,$lr

```

(continues on next page)



(continued from previous page)

```
.mask      0x00000000,0
.set  noreorder
.set  nomacro
# BB#0:
    addiu $2, $zero, 5
    ret   $lr
.set  macro
.set  reorder
.end  _Z6callerv
$tmp1:
    .size _Z6callerv, ($tmp1)-_Z6callerv
```

Though `llvm-link` provide optimization in IR level to support separate compile, it come with the cost in compile time. As you can imagine, any one statement change will change the output IR of `llvm-link`. And the obj binary code have to re-compile. Compare to the separate compile for each \*.c file, it only need to re-compile the corresponding \*.o file only.

## 3.2 Project

### 3.2.1 LLVM-VPO

Friend Gang-Ryung Uh replace LLC compiler by `llvm` on Very Portable Optimizer (VPO) compiler toolchain. VPO performs optimizations on a single intermediate representation called Register Transfer Lists (RTLs). In other word, the system generate RTLs from `llvm` IR and it do further optimization on RTLs.

The LLVM-VPO is illustrated at his home page. Click “**6. LLVM-VPO Compiler Development - 2012 Google Faculty Research Award**” at this home page<sup>3</sup> will get the information.

---

<sup>3</sup> <http://cs.boisestate.edu/~uh/>



## LIBRARY

- *Compiler-rt*
- *Avr libc*
- *Software Float Point Support*

Since Cpu0 has not hardware float point instructions, it needs soft float point library to finish the floating point operation. LLVM compiler-rt project include the software floating point library implementation, so we choose it as the implementation.

Since compiler-rt uses unix/linux rootfs structure, we fill the gap by porting avr libc.

Both the compiler-rt and avr libc porting is under going, it's not finished. The flow as follows,




Fig. 4.1: libc/softfloat library flow

The llvm-link which introduced at last chapter can be hired for optimization.

### 4.1 Compiler-rt

Directory libex/libsoftfloat/compiler-rt include the floating point library support for Cpu0 backend. The compiler-rt<sup>1</sup> version we use is llvm 3.5 release.

The code modified as follows,

```
chungshu@ChungShudeMacBook-Air compiler-rt % diff -u -r /Users/chungshu/Documents/  
↪ compiler-rt-3.5.0.src/lib/builtins/ builtins/ &> compiler-rt-diff.patch
```

---

<sup>1</sup> <http://compiler-rt.llvm.org/>

## lbt/Fig/compiler-rt-diff.patch

```

Only in builtins/: Makefile
diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/absvdi2.c_
↳builtins/absvdi2.c
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/absvdi2.c      2014-
↳02-14 17:20:33.000000000 +0800
+++ builtins/absvdi2.c      2021-12-11 22:37:27.000000000 +0800
@@ -21,9 +21,26 @@
COMPILER_RT_ABI di_int
__absvdi2(di_int a)
{
+ #if 1
+     const int N = (int)(sizeof(di_int) * CHAR_BIT);
+     if (a == ((di_int)1 << (N-1)))
+         compiler_rt_abort();
+     const di_int t = a >> (N - 1);
+     return (a ^ t) - t;
+ #else
+ // Fix for Cpu0, Not OK!
+     di_int result;
+     const int N = (int)(sizeof(di_int) * CHAR_BIT);
+     if (a == (1 << (N-1))) {
+         // In 2's complement, positive only reach (power(2, N-1) - 1)
+         compiler_rt_abort();
+     }
+     const di_int t = (1 << (N-1));
+     if ((a & t) == t)
+         // negative, t = 0x8000...0
+         result = 0 - a;
+     else
+         result = a;
+     return result;
+ #endif
}
diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/absvsi2.c_
↳builtins/absvsi2.c
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/absvsi2.c      2014-
↳02-14 17:20:33.000000000 +0800
+++ builtins/absvsi2.c      2021-12-11 22:37:27.000000000 +0800
@@ -18,12 +18,31 @@
/* Effects: aborts if abs(x) < 0 */

+extern int printf(const char *format, ...);
COMPILER_RT_ABI si_int
__absvsi2(si_int a)
{
+ #if 0
+     const int N = (int)(sizeof(si_int) * CHAR_BIT);
+     if (a == (1 << (N-1)))
+         compiler_rt_abort();
+     if (a == (1 << (N-1))) {
+         compiler_rt_abort();

```

(continues on next page)

(continued from previous page)

```

+     }
+     const si_int t = a >> (N - 1);
+     return (a ^ t) - t;
+ #else
+ // Fix for Cpu0
+ si_int result;
+ const int N = (int)(sizeof(si_int) * CHAR_BIT);
+ if (a == (1 << (N-1))) {
+ // In 2's compliment, positive only reach (power(2, N-1) - 1)
+     compiler_rt_abort();
+ }
+ const si_int t = (1 << (N-1));
+ if ((a & t) == t)
+ // negative, t = 0x8000...0
+     result = 0 - a;
+ else
+     result = a;
+ return result;
+ #endif
+ }
diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/adddf3.c
↪builtins/adddf3.c
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/adddf3.c      2014-05-
↪28 23:06:25.000000000 +0800
+++ builtins/adddf3.c                  2021-12-11 22:37:27.000000000 +0800
@@ -13,6 +13,7 @@
 //====-----

#define DOUBLE_PRECISION
+#undef __LP64__
#include "fp_add_impl.inc"

ARM_EABI_FNaliases(dadd, adddf3)
Only in /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/: arm
Only in /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/: armv6m
Only in builtins/: cpu0-porting.c
diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/divdc3.c
↪builtins/divdc3.c
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/divdc3.c      2014-03-
↪01 23:30:50.000000000 +0800
+++ builtins/divdc3.c                  2021-12-11 22:37:27.000000000 +0800
@@ -21,7 +21,9 @@
__divdc3(double __a, double __b, double __c, double __d)
{
    int __ilogbw = 0;
-    double __logbw = crt_logb(crt_fmax(crt_fabs(__c), crt_fabs(__d)));
+// Cpu0 porting
+//     double __logbw = crt_logb(crt_fmax(crt_fabs(__c), crt_fabs(__d)));
+    double __logbw = crt_logb(fmax(crt_fabs(__c), crt_fabs(__d)));
+    if (crt_isfinite(__logbw))
+    {
+        __ilogbw = (int)__logbw;

```

(continues on next page)

(continued from previous page)

```

diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/fixdfsi.c
↪builtins/fixdfsi.c
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/fixdfsi.c      2014-
↪03-01 23:30:50.000000000 +0800
+++ builtins/fixdfsi.c      2021-12-11 22:37:27.000000000 +0800
@@ -13,13 +13,18 @@
//
//===-----
+//#undef SINGLE_PRECISION
+define DOUBLE_PRECISION
+//#define SINGLE_PRECISION
#include "fp_lib.h"

#include "int_lib.h"

ARM_EABI_FNALIAS(d2iz, fixdfsi)

+int printf(const char *format, ...);
+int sprintf(char *out, const char *format, ...);
+
COMPILER_RT_ABI int
__fixdfsi(fp_t a) {
@@ -29,14 +34,29 @@
    const int sign = aRep & signBit ? -1 : 1;
    const int exponent = (aAbs >> significandBits) - exponentBias;
    const rep_t significand = (aAbs & significandMask) | implicitBit;
+
+if 0
+    printf("__CONCAT(1, ULL)=%08x%08x, REP_C(1)=%08x%08x, implicitBit=%08x%08x\n",
↪(int)(__CONCAT(1, ULL) >> 32), (int)(__CONCAT(1, ULL) & 0xffffffff), (int)(REP_C(1) >>
↪32), (int)(REP_C(1) & 0xffffffff), (int)(implicitBit >> 32), (int)(implicitBit &
↪0xffffffff));
+    printf("significandBits=%x, ttt=%x, exponentBias=%x, signBit=%08x%08x\n",
↪significandBits, ttt, exponentBias, (int)(signBit >> 32), (int)(signBit & 0xffffffff));
+    printf("significandMask=%08x%08x\n", (int)(significandMask >> 32),
↪(int)(significandMask & 0xffffffff));
+    printf("sign=%x, exponent=%x, significand=%08x%08x\n", sign, exponent,
↪(int)(significand >> 32), (int)(significand & 0xffffffff));
+    printf("aAbs=%08x%08x, significandBits=%x\n", (int)(aAbs >> 32), (int)(aAbs &
↪0xffffffff), significandBits);
+
+endif

    // If 0 < exponent < significandBits, right shift to get the result.
    if ((unsigned int)exponent < significandBits) {
        return sign * (significand >> (significandBits - exponent));
+
+if 0
+    int aa = (int)(significandBits - exponent);
+    int bb = (int)(significand >> aa);
+    int cc = (int)(sign * bb);
+    printf("sign=%08x, significand=%08x%08x, aa=%08x, bb=%08x, cc=%08x\n", sign,
↪(int)(significand >> 32), (int)(significand & 0xffffffff), aa, bb, cc);

```

(continues on next page)

(continued from previous page)

```

+     return cc;
+#endif
+     }

    // If exponent is negative, the result is zero.
    else if (exponent < 0) {
+     printf("2\n");
+     return 0;
    }

@@ -45,6 +65,7 @@
    // behavior, but the conversion itself is undefined in that case, so
    // whatever the compiler decides to do is fine.
    else {
+     printf("3\n");
+     return sign * (significand << (exponent - significandBits));
    }
}
diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/fixsfsi.c
↪builtins/fixsfsi.c
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/fixsfsi.c      2014-
↪02-14 17:20:33.000000000 +0800
+++ builtins/fixsfsi.c                  2021-12-11 22:37:27.000000000 +0800
@@ -18,6 +18,9 @@

ARM_EABI_FNaliases(f2iz, fixsfsi)

+int printf(const char *format, ...);
+int sprintf(char *out, const char *format, ...);
+
COMPILER_RT_ABI int
__fixsfsi(fp_t a) {
    // Break a into sign, exponent, significand
@@ -26,14 +29,28 @@
    const int sign = aRep & signBit ? -1 : 1;
    const int exponent = (aAbs >> significandBits) - exponentBias;
    const rep_t significand = (aAbs & significandMask) | implicitBit;

-
+#if 0
+    printf("significandBits=%x, ttt=%x, exponentBias=%x, signBit=%x\n", significandBits,
↪ ttt, exponentBias, (int)signBit);
+    printf("REP_C(1)=%x, implicitBit=%x\n", REP_C(1), implicitBit);
+    printf("sign=%x, exponent=%x, significand=%x\n", sign, exponent, significand);
+    printf("aAbs=%x, significandMask=%x, implicitBit=%x, significandBits=%x, ttt=%x\n",
↪ aAbs, significandMask, implicitBit, significandBits, ttt);
+#endif
+
+    // If 0 < exponent < significandBits, right shift to get the result.
    if ((unsigned int)exponent < significandBits) {
        return sign * (significand >> (significandBits - exponent));
    }
+#if 0
+    int aa = (int)(significandBits - exponent);

```

(continues on next page)

(continued from previous page)

```

+         int bb = (int)(significand >> aa);
+         int cc = (int)(sign * bb);
+         printf("sign=%08x, significand=%08x, aa=%08x, bb=%08x, cc=%08x\n", sign,
↪(int)(significand & 0xffffffff), aa, bb, cc);
+         return cc;
+ #endif
+     }

    // If exponent is negative, the result is zero.
    else if (exponent < 0) {
+         printf("2\n");
+         return 0;
+     }

@@ -42,6 +59,7 @@
    // behavior, but the conversion itself is undefined in that case, so
    // whatever the compiler decides to do is fine.
    else {
+         printf("3\n");
+         return sign * (significand << (exponent - significandBits));
+     }
+ }
diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/floatundidf.c
↪builtins/floatundidf.c
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/floatundidf.
↪c      2014-03-01 23:30:50.000000000 +0800
+++ builtins/floatundidf.c      2021-12-11 22:37:27.000000000 +0800
@@ -21,15 +21,15 @@
    /* see eeee eeee mmm mmm mmm mmm mmm | mmm mmm mmm mmm mmm mmm mmm mmm */

    #include "int_lib.h"

-
-ARM_EABI_FNaliases(u12d, floatundidf)
+ #if 1
+ //ARM_EABI_FNaliases(u12d, floatundidf)

    #ifndef __SOFT_FP__
    /* Support for systems that have hardware floating-point; we'll set the inexact flag
     * as a side-effect of this computation.
     */

-COMPILER_RT_ABI double
+ /*COMPILER_RT_ABI */double
    __floatundidf(du_int a)
    {
        static const double twop52 = 0x1.0p52;
@@ -51,7 +51,7 @@
    * set, and we don't want to code-gen to an unknown soft-float implementation.
    */

-COMPILER_RT_ABI double
+ /*COMPILER_RT_ABI */double

```

(continues on next page)



(continued from previous page)

```

__floatundidf(du_int a)
{
    if (a == 0)
@@ -98,9 +98,11 @@
        /* a is now rounded to DBL_MANT_DIG bits */
    }
    double_bits fb;
-   fb.u.high = ((e + 1023) << 20) | /* exponent */
+   fb.u.s.high = ((e + 1023) << 20) | /* exponent */
        ((su_int)(a >> 32) & 0x000FFFFF); /* mantissa-high */
-   fb.u.low = (su_int)a; /* mantissa-low */
+   fb.u.s.low = (su_int)a; /* mantissa-low */
    return fb.f;
}
#endif
+
+#endif
diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/fp_lib.h_
↪builtins/fp_lib.h
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/fp_lib.h      2014-07-
↪08 16:52:57.000000000 +0800
+++ builtins/fp_lib.h      2021-12-11 22:37:27.000000000 +0800
@@ -38,13 +38,15 @@
    # endif
    #endif

-#if defined SINGLE_PRECISION
+//#if defined SINGLE_PRECISION
+#if defined(SINGLE_PRECISION)

    typedef uint32_t rep_t;
    typedef int32_t srep_t;
    typedef float fp_t;
    #define REP_C UINT32_C
    #define significandBits 23
+    #define ttt 1

    static inline int rep_clz(rep_t a) {
        return __builtin_clz(a);
@@ -58,13 +60,17 @@
    }
    COMPILER_RT_ABI fp_t __addsf3(fp_t a, fp_t b);

-#elif defined DOUBLE_PRECISION
+//#elif defined DOUBLE_PRECISION
+#elif defined(DOUBLE_PRECISION)

    typedef uint64_t rep_t;
    typedef int64_t srep_t;
    typedef double fp_t;
+//#define REP_C UINT64_C
+#undef REP_C

```

(continues on next page)

(continued from previous page)

```

#define REP_C UINT64_C
#define significandBits 52
+define ttt 2

static inline int rep_clz(rep_t a) {
  #if defined __LP64__
@@ -101,7 +107,8 @@

  COMPILER_RT_ABI fp_t __adddf3(fp_t a, fp_t b);

-#elif defined QUAD_PRECISION
+//#elif defined QUAD_PRECISION
+#elif defined(QUAD_PRECISION)
  #if __LDBL_MANT_DIG__ == 113
  #define CRT_LDBL_128BIT
  typedef __uint128_t rep_t;
Only in /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/: i386
diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/int_lib.h
↪ builtins/int_lib.h
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/int_lib.h      2014-
↪ 05-13 00:47:01.000000000 +0800
+++ builtins/int_lib.h                2021-12-11 22:37:27.000000000 +0800
@@ -37,28 +37,15 @@
  # define COMPILER_RT_ABI COMPILER_RT_EXPORT
  #endif

-#if defined(__NetBSD__) && (defined(_KERNEL) || defined(_STANDALONE))
-/*
- * Kernel and boot environment can't use normal headers,
- * so use the equivalent system headers.
- */
-# include <machine/limits.h>
-# include <sys/stdint.h>
-# include <sys/types.h>
-#else
-/* Include the standard compiler builtin headers we use functionality from. */
-# include <limits.h>
-# include <stdint.h>
-# include <stdbool.h>
-# include <float.h>
-#endif
-
  /* Include the commonly used internal type definitions. */
  #include "int_types.h"

  /* Include internal utility function declarations. */
  #include "int_util.h"

+/* Include the standard compiler builtin headers we use functionality from. */
+# include <limits.h>
+
+  COMPILER_RT_ABI si_int __paritysi2(si_int a);

```

(continues on next page)

(continued from previous page)

```

COMPILER_RT_ABI si_int __paritydi2(di_int a);

@@ -73,4 +60,6 @@
COMPILER_RT_ABI tu_int __udivmodti4(tu_int a, tu_int b, tu_int* rem);
#endif

+#define __SOFT_FP__ 1
+
#endif /* INT_LIB_H */
diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/int_math.h_
↳ builtins/int_math.h
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/int_math.h      2014-
↳ 02-14 17:20:33.000000000 +0800
+++ builtins/int_math.h      2021-12-11 22:37:27.000000000 +0800
@@ -47,11 +47,11 @@
#define crt_copysign(x, y) __builtin_copysign((x), (y))
#define crt_copysignf(x, y) __builtin_copysignf((x), (y))
#define crt_copysignl(x, y) __builtin_copysignl((x), (y))
-
+/*
#define crt_fabs(x) __builtin_fabs((x))
#define crt_fabsf(x) __builtin_fabsf((x))
#define crt_fabsl(x) __builtin_fabsl((x))
-
+*/
#define crt_fmax(x, y) __builtin_fmax((x), (y))
#define crt_fmaxf(x, y) __builtin_fmaxf((x), (y))
#define crt_fmaxl(x, y) __builtin_fmaxl((x), (y))
diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/int_types.h_
↳ builtins/int_types.h
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/int_types.h    2014-
↳ 05-19 23:48:46.000000000 +0800
+++ builtins/int_types.h      2021-12-11 22:37:27.000000000 +0800
@@ -18,7 +18,9 @@
#ifndef INT_TYPES_H
#define INT_TYPES_H

-#include "int_endianness.h"
+// #include "int_endianness.h"
+#define _YUGA_LITTLE_ENDIAN 0
+#define _YUGA_BIG_ENDIAN 1

typedef      int si_int;
typedef unsigned su_int;
@@ -139,5 +141,14 @@
    long double f;
} long_double_bits;

+#include <stdbool.h>
+// #define bool int
+// typedef unsigned char      uint8_t;
+#define uint32_t unsigned int

```

(continues on next page)

(continued from previous page)

```

#define uint64_t unsigned long long
+//typedef unsigned int      uintptr_t;
#define FLT_MANT_DIG 24
#define DBL_MANT_DIG 53
+
+  #endif /* INT_TYPES_H */

diff -u -r /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/int_util.c
↪builtins/int_util.c
--- /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/int_util.c      2014-
↪02-14 17:20:33.000000000 +0800
+++ builtins/int_util.c      2021-12-11 22:37:27.000000000 +0800
@@ -58,4 +58,8 @@
    abort();
  }

+void abort() {
+  return;
+}
+
+  #endif
Only in builtins/: libFloat.o
Only in /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/: ppc
Only in /Users/chungshu/Documents/compiler-rt-3.5.0.src/lib/builtins/: x86_64

```

### lbt/exlbt/libsoftfloat/compiler-rt/builtins/Makefile

```

CC=clang
LLC=~/.llvm/test/cmake_debug_build/bin/llc
LINK=~/.llvm/test/cmake_debug_build/bin/ld
INCFLAG=-I/home/cschen/test/open-src-libc/avr-libc-1.8.1/include -I/home/cschen/test/
↪open-src-libc/avr-libc-1.8.1/common
CFLAGS=-target mips-unknown-linux-gnu -emit-llvm ${INCFLAG} -S
LLCFLAGS=-march=cpu0 -relocation-model=static -filetype=obj
LDFLAGS=-flavor gnu -target cpu0-unknown-linux-gnu
#SOURCES := absvdi2.c absvsi2.c absvti2.c adddf3.c addsf3.c addtf3.c addvdi3.c \
#   addvsi3.c addvti3.c apple_versioning.c ashldi3.c ashlti3.c ashrdi3.c \
#   ashrti3.c clear_cache.c clzdi2.c clzsi2.c clzti2.c cmpdi2.c cmpti2.c \
#   comparedf2.c comparesf2.c ctzdi2.c ctzsi2.c ctzti2.c divdc3.c divdf3.c \
#   divdi3.c divmoddi4.c divmodsi4.c divsc3.c divsf3.c divsi3.c divti3.c divtf3.c \
#   divxc3.c

SOURCES := absvdi2.c absvsi2.c absvti2.c

OUTPUT_OBJ_DIR=obj
#$(sources:.c=.d)
#IRS := $(addprefix , $(addsuffix .o, ${SOURCES}))
IRS := $(SOURCES:.c=.l)
#IRS=$(SOURCES:.c=.ll)
OBJECTS=$(IRS:.l=.o)

```

(continues on next page)

(continued from previous page)

```

EXECUTABLE=compiler-rt.bc

all: $(SOURCES) $(EXECUTABLE)

$(EXECUTABLE): $(OBJECTS)
    ${LINK} ${LDFLAGS} ${OBJECTS} -o $$@

$(OBJECTS): %.o: %.ll
    ${LLC} ${LLCFLAGS} $< -o $$@

$(IRS): $(SOURCES)
    ${CC} ${CFLAGS} $< -o $$@

.PHONY: clean
clean:
    rm -rf ${OUTPUT_OBJ_DIR} *.bc *.ll *.o

```

**lbt/exlbt/libsoftfloat/compiler-rt/builtins/cpu0-porting.c**

```

/*
float __TGMATH_BINARY_REAL_ONLY(Val1, Val2, Fct)
{
    return  (__extension__ (((sizeof (Val1) > sizeof (double)
        || sizeof (Val2) > sizeof (double))
        && __builtin_classify_type ((Val1) + (Val2)) == 8)
        ? (__typeof ((__tgmth_real_type (Val1)) 0
            + (__tgmth_real_type (Val2)) 0))
            __tgm1(Fct) (Val1, Val2)
        : (sizeof (Val1) == sizeof (double)
            || sizeof (Val2) == sizeof (double)
            || __builtin_classify_type (Val1) != 8
            || __builtin_classify_type (Val2) != 8)
            ? (__typeof ((__tgmth_real_type (Val1)) 0
                + (__tgmth_real_type (Val2)) 0))
                Fct (Val1, Val2)
            : (__typeof ((__tgmth_real_type (Val1)) 0
                + (__tgmth_real_type (Val2)) 0))
                Fct##f (Val1, Val2)))));
}
*/

#define FS_SIGNED_M      0x80000000
#define FS_EXP_M        0x7f800000
#define FS_SIGNIFICAND_M 0x007fffff

float fmax(float x, float y)
{
    int x_b31 = ((unsigned int)x & FS_SIGNED_M) >> 31;
    int x_exp_signi = ((unsigned int)x & (FS_EXP_M | FS_SIGNIFICAND_M));

```

(continues on next page)

(continued from previous page)

```

int y_b31 = ((unsigned int)y & FS_SIGNED_M) >> 31;
int y_exp_signi = ((unsigned int)y & (FS_EXP_M | FS_SIGNIFICAND_M));
if (x_b31 == 1 && y_b31 == 1) {
    if (x_exp_signi > y_exp_signi) {
        return y;
    }
    else {
        return x;
    }
}
else if (x_b31 == 0 && y_b31 == 1) {
    return x;
}
else if (x_b31 == 1 && y_b31 == 0) {
    return y;
}
else if (x_b31 == 0 && y_b31 == 0) {
    if (x_exp_signi >= y_exp_signi) {
        return x;
    }
    else {
        return y;
    }
}
}

float fabsf(float x)
{
    float* p = &x;
    int x_b31 = ((unsigned int)(*p) & FS_SIGNED_M) >> 31;
    if (x_b31 == 1) {
        x = (float)((unsigned int)(*p) | FS_SIGNED_M);
        return (float)(*p);
    }
    else
        return (float)(*p);
}

#define DS_SIGNED_M      0x8000000000000000

double fabsl(double x)
{
    double* p = &x;
    int x_b31 = ((unsigned long long)(*p) & DS_SIGNED_M) >> 63;
    if (x_b31 == 1) {
        x = (double)((unsigned long long)(*p) | DS_SIGNED_M);
        return (double)(*p);
    }
    else
        return (float)(*p);
}

```

(continues on next page)

(continued from previous page)

```
float fabs(float x)
{
    return fabsf(x);
}
```

## 4.2 Avr libc

Directory libex/libc/avr-libc-1.8.1 include the libc porting.

AVR Libc is a Free Software project whose goal is to provide a high quality C library for use with GCC on Atmel AVR microcontrollers. AVR Libc is licensed under a single unified license. This so-called modified Berkeley license is intended to be compatible with most Free Software licenses like the GPL, yet impose as little restrictions for the use of the library in closed-source commercial applications as possible<sup>2</sup>.

The source code can be download from here<sup>3</sup>. Document are here<sup>45</sup>.

## 4.3 Software Float Point Support

exlbt/input/ch\_float\_necessary.cpp

```
//#include "debug.h"

extern "C" int printf(const char *format, ...);
extern "C" int sprintf(char *out, const char *format, ...);

template <class T>
T test_shift_left(T a, T b) {
    return (a << b);
}

template <class T>
T test_shift_right(T a, T b) {
    return (a >> b);
}

template <class T1, class T2, class T3>
T1 test_add(T2 a, T3 b) {
    T1 c = a + b;
    return c;
}

template <class T1, class T2, class T3>
T1 test_mul(T2 a, T3 b) {
    T1 c = a * b;
    return c;
}
```

(continues on next page)

<sup>2</sup> <http://www.nongnu.org/avr-libc/>

<sup>3</sup> <http://download.savannah.gnu.org/releases/avr-libc/>

<sup>4</sup> <http://www.atmel.com/webdoc/AVRLibcReferenceManual/index.html>

<sup>5</sup> <http://courses.cs.washington.edu/courses/csep567/04sp/pdfs/avr-libc-user-manual.pdf>

(continued from previous page)

```

}

template <class T1, class T2, class T3>
T1 test_div(T2 a, T3 b) {
    T1 c = a / b;
    return c;
}

int main() {
    int a;

    // call __ashldi3
    a = (int)test_shift_left<long long>(0x12, 4); // 0x120 = 288
    printf("(int)test_shift_left<long long>(0x12, 4) = %d\n", a);

    // call __ashrdi3
    a = (int)test_shift_right<long long>(0x0016666600000000a, 48); // 0x16 = 22
    printf("(int)test_shift_right<long long>(0x0016666600000000a, 48) = %d\n", a);

    // call __lshrdi3
    a = (int)test_shift_right<unsigned long long>(0x0016666600000000a, 48); // 0x16 = 22
    printf("(int)test_shift_right<unsigned long long>(0x0016666600000000a, 48) = %d\n", a);

    // call __addsf3, __fixsfsi
    a = (int)test_add<float, float, float>(-2.2, 3.3); // (int)1.1 = 1
    printf("(int)test_add<float, float, float>(-2.2, 3.3) = %d\n", a);

    // call __mulsf3, __fixsfsi
    a = (int)test_mul<float, float, float>(-2.2, 3.3); // (int)-7.26 = -7
    printf("(int)test_mul<float, float, float>(-2.2, 3.3) = %d\n", a);

    // call __divsf3, __fixsfsi
    a = (int)test_div<float, float, float>(-1.8, 0.5); // (int)-3.6 = -3
    printf("(int)test_div<float, float, float>(-1.8, 0.5) = %d\n", a);

    // call __extendsfdf2, __adddf3, __fixdfsi
    a = (int)test_add<double, double, float>(-2.2, 3.3); // (int)1.1 = 1
    printf("(int)test_add<double, double, float>(-2.2, 3.3) = %d\n", a);

    // call __extendsfdf2, __muldf3, __fixdfsi
    a = (int)test_mul<double, float, double>(-2.2, 3.3); // (int)-7.26 = -7
    printf("(int)test_mul<double, float, double>(-2.2, 3.3) = %d\n", a);

    // call __extendsfdf2, __muldf3, __truncdfsf2, __fixdfsi
    // ! __truncdfsf2 in truncdfsf2.c is not work for Cpu0
    a = (int)test_mul<float, float, double>(-2.2, 3.3); // (int)-7.26 = -7
    printf("(int)test_mul<float, float, double>(-2.2, 3.3) = %d\n", a);

    // call __divdf3, __fixdfsi
    a = (int)test_div<double, double, double>(-1.8, 0.5); // (int)-3.6 = -3
    printf("(int)test_div<double, double, double>(-1.8, 0.5) = %d\n", a);

```

(continues on next page)



(continued from previous page)

```

    return 0;
}

```

**exlbt/input/build-float-necessary.sh**

```

#!/usr/bin/env bash

INCFLAG="-I../libsoftfloat/compiler-rt/builtins"

source functions.sh

sh_name=build-float-necessary.sh
argNum=$((#))
arg1=$1
arg2=$2

prologue;

libs=../libsoftfloat/compiler-rt
pushd ${libs}
bash build.sh
popd
objs=${libs}/obj

${CLANG} -target mips-unknown-linux-gnu -c start.cpp -emit-llvm -o start.bc
${CLANG} -target mips-unknown-linux-gnu -c debug.cpp -emit-llvm -o debug.bc
${CLANG} -target mips-unknown-linux-gnu -c printf-stdarg-def.c -emit-llvm \
-o printf-stdarg-def.bc
${CLANG} -target mips-unknown-linux-gnu -c printf-stdarg.c -emit-llvm \
-o printf-stdarg.bc
${CLANG} $INCFLAG -c ch_float_necessary.cpp -emit-llvm -o ch_float_necessary.bc
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-llc=true start.bc -o start.cpu0.o
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-llc=true debug.bc -o debug.cpu0.o
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-llc=true printf-stdarg-def.bc -o printf-stdarg-def.cpu0.o
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-llc=true printf-stdarg.bc -o printf-stdarg.cpu0.o
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-llc=true ch_float_necessary.bc -o ch_float_necessary.cpu0.o
${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
-filetype=obj -has-llc=true lib_cpu0.ll -o lib_cpu0.o
${TOOLDIR}/lld -flavor gnu -o a.out \
    start.cpu0.o debug.cpu0.o printf-stdarg-def.cpu0.o printf-stdarg.cpu0.o \
    ch_float_necessary.cpu0.o lib_cpu0.o ${objs}/libFloat.o
#  ${objs}/fixsfsi.o ${objs}/fixsfdi.o ${objs}/fixdfsi.o \
#  ${objs}/addsf3.o ${objs}/mulsf3.o ${objs}/divsf3.o \
#  ${objs}/adddf3.o ${objs}/muldf3.o ${objs}/divdf3.o \

```

(continues on next page)

(continued from previous page)

```
# ${olibs}/ashrdi3.o ${olibs}/ashldi3.o ${olibs}/lshrdi3.o \  
# ${olibs}/extendsfdf2.o ${olibs}/truncdfsf2.o  
  
epilogue;
```

Run as follows,

```
JonathantekiiMac:input Jonathan$ bash build-float-necessary.sh cpu032II be  
...  
endian = BigEndian  
0 /* 0: big endian, 1: little endian */  
  
JonathantekiiMac:input Jonathan$ iverilog -o cpu0IIs cpu0IIs.v  
JonathantekiiMac:input Jonathan$ ./cpu0IIs  
114-43-184-210:verilog Jonathan$ ./cpu0IIs  
ARNING: cpu0.v:487: $readmemh(cpu0.hex): Not enough words in the file for the requested_  
↪range [0:524287].  
taskInterrupt(001)  
(int)test_shift_left<long long>(0x12, 4) = 288  
(int)test_shift_right<long long>(0x0016666600000000a, 48) = 22  
(int)test_shift_right<unsigned long long>(0x0016666600000000a, 48) = 22  
(int)test_add<float, float, float>(-2.2, 3.3) = 1  
(int)test_mul<float, float, float>(-2.2, 3.3) = -7  
(int)test_div<float, float, float>(-1.8, 0.5) = -3  
(int)test_add<double, double, float>(-2.2, 3.3) = 1  
(int)test_mul<float, float, double>(-2.2, 3.3) = -7  
(int)test_mul<float, float, double>(-2.2, 3.3) = 0  
(int)test_div<double, double, double>(-1.8, 0.5) = -3  
total cpu cycles = 182585  
RET to PC < 0, finished!
```

- This chapter add Cpu0 target to frontend clang.

## exlbt/clang/include/clang/Basic/TargetBuiltins.h

exlbt/clang/include/clang/Basic/BuiltinsCpu0.def

(continues on next page)

(continued from previous page)

```
BUILTIN(__builtin_cpu0_gcd, "iii", "n")

#undef BUILTIN
```

**exlbt/clang/include/clang/lib/Driver/CMakeLists.txt**

```
ToolChains/Arch/Cpu0.cpp
```

**exlbt/clang/lib/Driver/ToolChains/CommonArgs.cpp**

```
#include "Arch/Cpu0.h"
...
case llvm::Triple::cpu0:
case llvm::Triple::cpu0el: {
   StringRef CPUName;
    StringRef ABIName;
    cpu0::getCpu0CPUAndABI(Args, T, CPUName, ABIName);
    return std::string(CPUName);
}
```

**exlbt/clang/lib/Driver/ToolChains/Arch/Cpu0.h**

```
//====- Cpu0.h - Cpu0-specific Tool Helpers -----*- C++ -*-====//
//
// Part of the LLVM Project, under the Apache License v2.0 with LLVM Exceptions.
// See https://llvm.org/LICENSE.txt for license information.
// SPDX-License-Identifier: Apache-2.0 WITH LLVM-exception
//
//=====//

#ifndef LLVM_CLANG_LIB_DRIVER_TOOLCHAINS_ARCH_CPU0_H
#define LLVM_CLANG_LIB_DRIVER_TOOLCHAINS_ARCH_CPU0_H

#include "clang/Driver/Driver.h"
#include "llvm/ADT/StringRef.h"
#include "llvm/ADT/Triple.h"
#include "llvm/Option/Option.h"
#include <string>
#include <vector>

namespace clang {
namespace driver {
namespace tools {

namespace cpu0 {
```

(continues on next page)

(continued from previous page)

```

void getCpu0CPUAndABI(const llvm::opt::ArgList &Args,
                     const llvm::Triple &Triple, StringRef &CPUName,
                     StringRef &ABIName);

} // end namespace cpu0
} // end namespace target
} // end namespace driver
} // end namespace clang

#endif // LLVM_CLANG_LIB_DRIVER_TOOLCHAINS_ARCH_CPU0_H

```

**exlbt/clang/lib/Driver/ToolChains/Arch/Cpu0.cpp**

```

//====-- Cpu0.cpp - Tools Implementations -----*- C++ -*-====//
//
// Part of the LLVM Project, under the Apache License v2.0 with LLVM Exceptions.
// See https://llvm.org/LICENSE.txt for license information.
// SPDX-License-Identifier: Apache-2.0 WITH LLVM-exception
//
//====-=====//

#include "Cpu0.h"
#include "ToolChains/CommonArgs.h"
#include "clang/Driver/Driver.h"
#include "clang/Driver/DriverDiagnostic.h"
#include "clang/Driver/Options.h"
#include "llvm/ADT/StringSwitch.h"
#include "llvm/Option/ArgList.h"

using namespace clang::driver;
using namespace clang::driver::tools;
using namespace clang;
using namespace llvm::opt;

// Get CPU and ABI names. They are not independent
// so we have to calculate them together.
void cpu0::getCpu0CPUAndABI(const ArgList &Args, const llvm::Triple &Triple,
                           StringRef &CPUName, StringRef &ABIName) {
    if (Arg *A = Args.getLastArg(clang::driver::options::OPT_march_EQ,
                                options::OPT_mcpu_EQ))
        CPUName = A->getValue();

    if (Arg *A = Args.getLastArg(options::OPT_mabi_EQ)) {
        ABIName = A->getValue();
        // Convert a GNU style Cpu0 ABI name to the name
        // accepted by LLVM Cpu0 backend.
        ABIName = llvm::StringSwitch<llvm::StringRef>(ABIName)
            .Case("32", "o32")
            .Default(ABIName);
    }
}

```

(continues on next page)

(continued from previous page)

```
// Setup default CPU and ABI names.
if (CPUName.empty()) {
    switch (Triple.getArch()) {
    default:
        llvm_unreachable("Unexpected triple arch name");
    case llvm::Triple::cpu0:
    case llvm::Triple::cpu0el:
        CPUName = "cpu032II";
        break;
    }
}

if (ABIName.empty())
    ABIName = "o32";
}
```

**exlbt/clang/include/clang/lib/Basic/CMakeLists.txt**

Targets/Cpu0.cpp

**exlbt/clang/include/clang/lib/Basic/Targets.cpp**

```
#include "Targets/Cpu0.h"
...
case llvm::Triple::cpu0:
    switch (os) {
    case llvm::Triple::Linux:
        return new LinuxTargetInfo<Cpu0TargetInfo>(Triple, Opts);
    case llvm::Triple::RTEMS:
        return new RTEMSTargetInfo<Cpu0TargetInfo>(Triple, Opts);
    case llvm::Triple::FreeBSD:
        return new FreeBSDTargetInfo<Cpu0TargetInfo>(Triple, Opts);
    case llvm::Triple::NetBSD:
        return new NetBSDTargetInfo<Cpu0TargetInfo>(Triple, Opts);
    default:
        return new Cpu0TargetInfo(Triple, Opts);
    }

case llvm::Triple::cpu0el:
    switch (os) {
    case llvm::Triple::Linux:
        return new LinuxTargetInfo<Cpu0TargetInfo>(Triple, Opts);
    case llvm::Triple::RTEMS:
        return new RTEMSTargetInfo<Cpu0TargetInfo>(Triple, Opts);
    case llvm::Triple::FreeBSD:
        return new FreeBSDTargetInfo<Cpu0TargetInfo>(Triple, Opts);
    case llvm::Triple::NetBSD:
        return new NetBSDTargetInfo<Cpu0TargetInfo>(Triple, Opts);
    }
```

(continues on next page)

(continued from previous page)

```
default:
    return new Cpu0TargetInfo(Triple, Opts);
}
```

**exlbt/clang/lib/Basic/Targets/Cpu0.h**

```
//====-- Cpu0.h - Declare Cpu0 target feature support -----*- C++ -*-====//
//
// Part of the LLVM Project, under the Apache License v2.0 with LLVM Exceptions.
// See https://llvm.org/LICENSE.txt for license information.
// SPDX-License-Identifier: Apache-2.0 WITH LLVM-exception
//
//====-
//
// This file declares Cpu0 TargetInfo objects.
//
//====-

#ifndef LLVM_CLANG_LIB_BASIC_TARGETS_CPU0_H
#define LLVM_CLANG_LIB_BASIC_TARGETS_CPU0_H

#include "clang/Basic/TargetInfo.h"
#include "clang/Basic/TargetOptions.h"
#include "llvm/ADT/Triple.h"
#include "llvm/Support/Compiler.h"

namespace clang {
namespace targets {

class LLVM_LIBRARY_VISIBILITY Cpu0TargetInfo : public TargetInfo {
    void setDataLayout() {
       StringRef Layout;

        if (ABI == "o32")
            Layout = "m:m-p:32:32-i8:8:32-i16:16:32-i64:64-n32-S64";
        else if (ABI == "n32")
            Layout = "m:e-p:32:32-i8:8:32-i16:16:32-i64:64-n32:64-S128";
        else if (ABI == "n64")
            Layout = "m:e-i8:8:32-i16:16:32-i64:64-n32:64-S128";
        else
            llvm_unreachable("Invalid ABI");

        if (BigEndian)
            resetDataLayout(("E-" + Layout).str());
        else
            resetDataLayout(("e-" + Layout).str());
    }

    static const Builtin::Info BuiltinInfo[];
    std::string CPU;
};
```

(continues on next page)

(continued from previous page)

```

protected:
    std::string ABI;
    enum Cpu0FloatABI { HardFloat, SoftFloat } FloatABI;

public:
    Cpu0TargetInfo(const llvm::Triple &Triple, const TargetOptions &Opt)
        : TargetInfo(Triple) {
        TheCXXABI.set(TargetCXXABI::GenericMIPS); // Cpu0 uses Mips ABI

        setABI("o32");

        CPU = "cpu032II";
    }

   StringRef getABI() const override { return ABI; }

    bool setABI(const std::string &Name) override {
        if (Name == "o32") {
            ABI = Name;
            return true;
        }
        return false;
    }

    bool isValidCPUName(StringRef Name) const override;

    bool setCPU(const std::string &Name) override {
        CPU = Name;
        return isValidCPUName(Name);
    }

    const std::string &getCPU() const { return CPU; }
    bool
    initFeatureMap(llvm::StringMap<bool> &Features, DiagnosticsEngine &Diags,
                  StringRef CPU,
                  const std::vector<std::string> &FeaturesVec) const override {
        if (CPU.empty())
            CPU = getCPU();
        if (CPU == "cpu032II")
            Features["HasCmp"] = Features["HasSlt"] = true;
        else if (CPU == "cpu032I")
            Features["HasCmp"] = true;
        else
            assert(0 && "incorrect CPU");
        return TargetInfo::initFeatureMap(Features, Diags, CPU, FeaturesVec);
    }

    unsigned getISARev() const;

    void getTargetDefines(const LangOptions &Opts,
                        MacroBuilder &Builder) const override;

```

(continues on next page)



(continued from previous page)

```

ArrayRef<Builtin::Info> getTargetBuiltins() const override;

bool hasFeature(StringRef Feature) const override;

BuiltinValistKind getBuiltinValistKind() const override {
    return TargetInfo::VoidPtrBuiltinValist;
}

ArrayRef<const char *> getGCCRegNames() const override {
    static const char *const GCCRegNames[] = {
        // CPU register names
        // Must match second column of GCCRegAliases
        "$0", "$1", "$2", "$3", "$4", "$5", "$6", "$7", "$8", "$9", "$10",
        "$11", "$12", "$13", "$14", "$15",
        // Hi/lo and condition register names
        "hi", "lo",
    };
    return llvm::makeArrayRef(GCCRegNames);
}

bool validateAsmConstraint(const char *&Name,
                          TargetInfo::ConstraintInfo &Info) const override {
    switch (*Name) {
    default:
        return false;
    case 'r': // CPU registers.
    case 'd': // Equivalent to "r" unless generating MIPS16 code.
    case 'y': // Equivalent to "r", backward compatibility only.
    //case 'f': // floating-point registers.
    case 'c': // $6 for indirect jumps
    case 'l': // lo register
    case 'x': // hilo register pair
        Info.setAllowsRegister();
        return true;
    case 'I': // Signed 16-bit constant
    case 'J': // Integer 0
    case 'K': // Unsigned 16-bit constant
    case 'L': // Signed 32-bit constant, lower 16-bit zeros (for lui)
    case 'M': // Constants not loadable via lui, addiu, or ori
    case 'N': // Constant -1 to -65535
    case 'O': // A signed 15-bit constant
    case 'P': // A constant between 1 go 65535
        return true;
    case 'R': // An address that can be used in a non-macro load or store
        Info.setAllowsMemory();
        return true;
    case 'Z':
        if (Name[1] == 'C') { // An address usable by ll, and sc.
            Info.setAllowsMemory();
            Name++; // Skip over 'Z'.
            return true;
        }
    }
}

```

(continues on next page)

(continued from previous page)

```

    }
    return false;
}
}

const char *getClobbers() const override {
    // In GCC, $1 is not widely used in generated code (it's used only in a few
    // specific situations), so there is no real need for users to add it to
    // the clobbers list if they want to use it in their inline assembly code.
    //
    // In LLVM, $1 is treated as a normal GPR and is always allocatable during
    // code generation, so using it in inline assembly without adding it to the
    // clobbers list can cause conflicts between the inline assembly code and
    // the surrounding generated code.
    //
    // Another problem is that LLVM is allowed to choose $1 for inline assembly
    // operands, which will conflict with the ".set at" assembler option (which
    // we use only for inline assembly, in order to maintain compatibility with
    // GCC) and will also conflict with the user's usage of $1.
    //
    // The easiest way to avoid these conflicts and keep $1 as an allocatable
    // register for generated code is to automatically clobber $1 for all inline
    // assembly code.
    //
    // FIXME: We should automatically clobber $1 only for inline assembly code
    // which actually uses it. This would allow LLVM to use $1 for inline
    // assembly operands if the user's assembly code doesn't use it.
    return "~{$1}";
}

bool handleTargetFeatures(std::vector<std::string> &Features,
                          DiagnosticsEngine &Diags) override {
    FloatABI = SoftFloat;

    for (const auto &Feature : Features) {
        if (Feature == "+cpu032I")
            setCPU("cpu032I");
        else if (Feature == "+cpu032II")
            setCPU("cpu032II");
        else if (Feature == "+soft-float")
            FloatABI = SoftFloat;
    }

    setDataLayout();

    return true;
}

ArrayRef<TargetInfo::GCCRegAlias> getGCCRegAliases() const override {
    static const TargetInfo::GCCRegAlias RegAliases[] = {
        {"at"}, {"$1"}, {"v0"}, {"$2"}, {"v1"}, {"$3"},

```

(continues on next page)

(continued from previous page)

```

        {"a0"}, "$4"}, {"a1"}, "$5"},          {"t9"}, "$6"},
        {"gp"}, "$11"}, {"fp"}, "$12"},        {"sp"}, "$13"},
        {"lr"}, "$14"}, {"sw"}, "$15"}
    };
    return llvm::makeArrayRef(RegAliases);
}

bool hasInt128Type() const override {
    return false;
}

unsigned getUnwindWordWidth() const override;

bool validateTarget(DiagnosticsEngine &Diags) const override;
bool hasExtIntType() const override { return true; }
};
} // namespace targets
} // namespace clang

#endif // LLVM_CLANG_LIB_BASIC_TARGETS_Cpu0_H

```

**exlbt/clang/lib/Basic/Targets/Cpu0.cpp**

```

//====-- Cpu0.cpp - Implement Cpu0 target feature support -----===//
//
// Part of the LLVM Project, under the Apache License v2.0 with LLVM Exceptions.
// See https://llvm.org/LICENSE.txt for license information.
// SPDX-License-Identifier: Apache-2.0 WITH LLVM-exception
//
//====-----===//
//
// This file implements Cpu0 TargetInfo objects.
//
//====-----===//

#include "Cpu0.h"
#include "Targets.h"
#include "clang/Basic/Diagnostic.h"
#include "clang/Basic/MacroBuilder.h"
#include "clang/Basic/TargetBuiltins.h"
#include "llvm/ADT/StringSwitch.h"

using namespace clang;
using namespace clang::targets;

const Builtin::Info Cpu0TargetInfo::BuiltinInfo[] = {
#define BUILTIN(ID, TYPE, ATTRS)                                \
    {#ID, TYPE, ATTRS, nullptr, ALL_LANGUAGES, nullptr},        \
#define LIBBUILTIN(ID, TYPE, ATTRS, HEADER)                    \
    {#ID, TYPE, ATTRS, HEADER, ALL_LANGUAGES, nullptr},

```

(continues on next page)

(continued from previous page)

```

#include "clang/Basic/BuiltinsCpu0.def"
};

static constexpr llvm::StringLiteral ValidCPUNames[] = {
    {"cpu032I"}, {"cpu032II"}};

bool Cpu0TargetInfo::isValidCPUName(StringRef Name) const {
    return llvm::find(ValidCPUNames, Name) != std::end(ValidCPUNames);
}

unsigned Cpu0TargetInfo::getISARev() const {
    return llvm::StringSwitch<unsigned>(getCPU())
        .Case("cpu032I", 1)
        .Case("cpu032II", 2)
        .Default(0);
}

void Cpu0TargetInfo::getTargetDefines(const LangOptions &Opts,
                                     MacroBuilder &Builder) const {
    if (BigEndian) {
        DefineStd(Builder, "CPU0EB", Opts);
        Builder.defineMacro("_CPU0EB");
    } else {
        DefineStd(Builder, "CPU0EL", Opts);
        Builder.defineMacro("_CPU0EL");
    }

    Builder.defineMacro("__cpu0__");
    Builder.defineMacro("_cpu0");
    if (Opts.GNUMode)
        Builder.defineMacro("cpu0");

    if (ABI == "o32" || ABI == "s32") {
        Builder.defineMacro("__cpu0", "32");
        Builder.defineMacro("_CPU0_ISA", "_CPU0_ISA_CPU032");
    } else {
        llvm_unreachable("Invalid ABI.");
    }

    const std::string ISARev = std::to_string(getISARev());

    if (!ISARev.empty())
        Builder.defineMacro("__cpu0_isa_rev", ISARev);

    if (ABI == "o32") {
        Builder.defineMacro("__cpu0_o32");
        Builder.defineMacro("_ABI032", "1");
        Builder.defineMacro("_CPU0_SIM", "_ABI032");
    } else if (ABI == "s32") {
        Builder.defineMacro("__cpu0_n32");
        Builder.defineMacro("_ABIS32", "2");
        Builder.defineMacro("_CPU0_SIM", "_ABIN32");
    }
}

```

(continues on next page)

(continued from previous page)

```

} else
    llvm_unreachable("Invalid ABI.");

Builder.defineMacro("__REGISTER_PREFIX__", "");

switch (FloatABI) {
case HardFloat:
    llvm_unreachable("HardFloat is not support in Cpu0");
    break;
case SoftFloat:
    Builder.defineMacro("__cpu0_soft_float", Twine(1));
    break;
}
}

bool Cpu0TargetInfo::hasFeature(StringRef Feature) const {
    return llvm::StringSwitch<bool>(Feature)
        .Case("cpu0", true)
        .Default(false);
}

ArrayRef<Builtin::Info> Cpu0TargetInfo::getTargetBuiltins() const {
    return llvm::makeArrayRef(BuiltinInfo, clang::Cpu0::LastTSBuiltin -
                               Builtin::FirstTSBuiltin);
}

unsigned Cpu0TargetInfo::getUnwindWordWidth() const {
    return llvm::StringSwitch<unsigned>(ABI)
        .Cases("o32", "s32", 32)
        .Default(getPointerWidth(0));
}

bool Cpu0TargetInfo::validateTarget(DiagnosticsEngine &Diags) const {
    if (CPU != "cpu032I" && CPU != "cpu032II") {
        Diags.Report(diag::err_target_unknown_cpu) << ABI << CPU;
        return false;
    }

    return true;
}

```

## 5.2 Verify

**exlbt/input/build-slinker-2.sh**

```

#!/usr/bin/env bash

source functions.sh

```

(continues on next page)

(continued from previous page)

```

sh_name=build-slinker-2.sh
argNum=$(( $# ))
arg1=$1
arg2=$2

prologue;

# -mcpu cannot pass to llvm via -mllvm while -has-llc can. So add cpu032I and cpu032II in
# clang/include/clang/Driver/Options.td

${CLANG} -target cpu0${endian}-unknown-linux-gnu -c start.cpp -static \
  -fintegrated-as -o start.o -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c debug.cpp -static \
  -fintegrated-as -o debug.o -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c printf-stdarg-def.c -static \
  -fintegrated-as -o printf-stdarg-def.o -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c printf-stdarg.c -static \
  -fintegrated-as -o printf-stdarg.o -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c \
  ${LBDEXDIR}/input/ch4_1_addsuboverflow.cpp -static -fintegrated-as \
  -o ch4_1_addsuboverflow.o -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c \
  ${LBDEXDIR}/input/ch8_1_br_jt.cpp -static -fintegrated-as -o ch8_1_br_jt.o \
  -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -O3 -target cpu0${endian}-unknown-linux-gnu -c \
  ${LBDEXDIR}/input/ch8_2_phinode.cpp -static -fintegrated-as -o ch8_2_phinode.o \
  -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c \
  ${LBDEXDIR}/input/ch8_1_blockaddr.cpp -static -fintegrated-as \
  -o ch8_1_blockaddr.o -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c \
  ${LBDEXDIR}/input/ch8_2_longbranch.cpp -static -fintegrated-as \
  -o ch8_2_longbranch.o -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -O1 -target cpu0${endian}-unknown-linux-gnu -c \
  ${LBDEXDIR}/input/ch9_2_tailcall.cpp -static -fintegrated-as \
  -o ch9_2_tailcall.o -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c \
  ${LBDEXDIR}/input/ch9_3_detect_exception.cpp -static -fintegrated-as \
  -o ch9_3_detect_exception.o -mcpu=${CPU} -mllvm -has-llc=true
${CLANG} -I${LBDEXDIR}/input/ -target cpu0${endian}-unknown-linux-gnu \
  -c ch_slinker.cpp -static -fintegrated-as -o ch_slinker.o -mcpu=${CPU} \
  -mllvm -has-llc=true

${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
  -filetype=obj -has-llc=true lib_cpu0.ll -o lib_cpu0.o

${TOOLDIR}/lld -flavor gnu start.o \
  debug.o printf-stdarg-def.o printf-stdarg.o ch4_1_addsuboverflow.o \
  ch8_1_br_jt.o ch8_2_phinode.o ch8_1_blockaddr.o ch8_2_longbranch.o \
  ch9_2_tailcall.o ch9_3_detect_exception.o ch_slinker.o lib_cpu0.o -o a.out

epilogue;

```

(continues on next page)

(continued from previous page)

**exlbt/input/build-float-necessary-2.sh**

```
#!/usr/bin/env bash

INCFLAG="-I../libsoftfloat/compiler-rt/builtins"

source functions.sh

sh_name=build-float-necessary-2.sh
argNum=$((#))
arg1=$1
arg2=$2

prologue;

${CLANG} -target cpu0${endian}-unknown-linux-gnu -c start.cpp -static \
  -fintegrated-as -o start.o -mcpu=${CPU} -mllvm -has-lld=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c debug.cpp -static \
  -fintegrated-as -o debug.o -mcpu=${CPU} -mllvm -has-lld=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c printf-stdarg-def.c -static \
  -fintegrated-as -o printf-stdarg-def.o -mcpu=${CPU} -mllvm -has-lld=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu -c printf-stdarg.c -static \
  -fintegrated-as -o printf-stdarg.o -mcpu=${CPU} -mllvm -has-lld=true
${CLANG} -target cpu0${endian}-unknown-linux-gnu $INCFLAG \
  -c ch_float_necessary.cpp -static -fintegrated-as -o ch_float_necessary.o \
  -mcpu=${CPU} -mllvm -has-lld=true

${TOOLDIR}/llc -march=cpu0${endian} -mcpu=${CPU} -relocation-model=static \
  -filetype=obj -has-lld=true lib_cpu0.ll -o lib_cpu0.o
-
libsf=../libsoftfloat/compiler-rt
pushd ${libsf}
#bash build-2.sh $1
bash build.sh
popd
olibs=${libsf}/obj

${TOOLDIR}/lld -flavor gnu -o a.out \
  start.o debug.o printf-stdarg-def.o printf-stdarg.o \
  ch_float_necessary.o lib_cpu0.o ${olibs}/libFloat.o
# ${olibs}/fixsfsi.o ${olibs}/fixsfdi.o ${olibs}/fixdfsi.o \
# ${olibs}/addsf3.o ${olibs}/mulsf3.o ${olibs}/divsf3.o \
# ${olibs}/adddf3.o ${olibs}/muldf3.o ${olibs}/divdf3.o \
# ${olibs}/ashrdr3.o ${olibs}/ashldi3.o ${olibs}/lshrdr3.o \
# ${olibs}/extendsfdf2.o ${olibs}/truncdfsf2.o

epilogue;
```

Build and run as follows,

```
chungshu@ChungShudeMacBook-Air input % bash build-slinker-2.sh cpu032I le
...
endian = LittleEndian
...
chungshu@ChungShudeMacBook-Air verilog % iverilog -o cpu0Is cpu0Is.v
chungshu@ChungShudeMacBook-Air verilog % ./cpu0Is
...

Harware interrupt 1
total cpu cycles = 248047
RET to PC < 0, finished!
chungshu@ChungShudeMacBook-Air input % bash build-slinker-2.sh cpu032II be
...
endian = BigEndian
chungshu@ChungShudeMacBook-Air verilog % iverilog -o cpu0IIs cpu0IIs.v
chungshu@ChungShudeMacBook-Air verilog % ./cpu0IIs
...

Harware interrupt 1
total cpu cycles = 228527
RET to PC < 0, finished!
chungshu@ChungShudeMacBook-Air input % bash build-float-necessary-2.sh cpu032II be
chungshu@ChungShudeMacBook-Air verilog % ./cpu0IIs
WARNING: cpu0.v:487: $readmemh(cpu0.hex): Not enough words in the file for the requested_
↳range [0:524287].
taskInterrupt(001)
(int)test_shift_left<long long>(0x12, 4) = 288
(int)test_shift_right<long long>(0x0016666600000000a, 48) = 22
(int)test_shift_right<unsigned long long>(0x0016666600000000a, 48) = 22
(int)test_add<float, float, float>(-2.2, 3.3) = 1
(int)test_mul<float, float, float>(-2.2, 3.3) = -7
(int)test_div<float, float, float>(-1.8, 0.5) = -3
(int)test_add<double, double, float>(-2.2, 3.3) = 1
(int)test_mul<double, float, double>(-2.2, 3.3) = -7
(int)test_mul<float, float, double>(-2.2, 3.3) = 0
(int)test_div<double, double, double>(-1.8, 0.5) = -3
total cpu cycles = 183630
RET to PC < 0, finished!
```



## RESOURCES

### 6.1 Build steps

<https://github.com/Jonathan2251/lbt/blob/master/README.md>

### 6.2 Book example code

The example code `exlbt.tar.gz` is available in:

<http://jonathan2251.github.io/lbt/exlbt.tar.gz>

### 6.3 Alternate formats

The book is also available in the following formats:

### 6.4 Presentation files

### 6.5 Search this website

- [search](#)