



SPECIFICATIONS

Contact Rating:	As per individual switch
Initial Contact Resistance:	Less than 20 milliohms
Insulation Resistance:	500VDC – 100 milliohms
Dielectric Strength:	500V AC for 1 minute between any terminal and frame
Operating Temperature:	-20°C to +70°C (-4°F to +158°F)
Soldering:	Auto 270 ± 5°C/3 seconds; Manual 350 ± 10° C/3 seconds
Life:	10,000 cycles minimum
Timing:	See individual specifications
	For special applications, contact factory


MATERIALS

Contact:	Silver plated copper alloy
----------	----------------------------



HOW TO ORDER

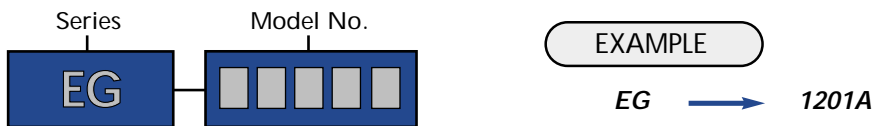


1201





Model No.	L
EG1201	4
EG1201A	5.5




PANEL MOUNT





Schematic




1205




Model No.	L
EG1205	4
EG1205A	5.5



P.C. MOUNTING




Schematic






SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SERIES E G SWITCHES


SLIDE SWITCHES





1206






P.C. MOUNTING




Schematic





1213

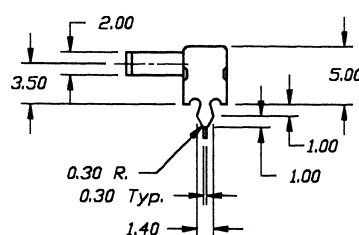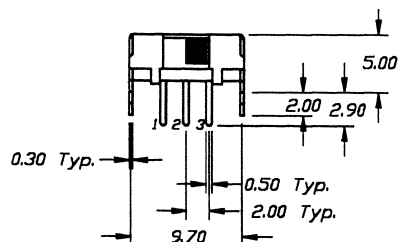



P.C. MOUNTING




Schematic




1218



P.C. MOUNTING




Schematic






SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SERIES E G SWITCHES


SLIDE SWITCHES




1224






P.C. MOUNTING




Schematic





1247






P.C. MOUNTING

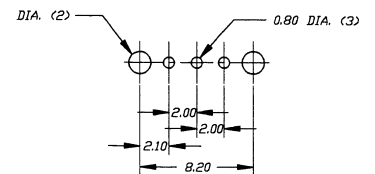


Schematic




1248

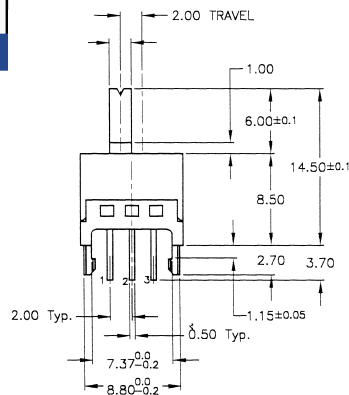

P.C. MOUNTING




Schematic




SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SLIDE SWITCHES




Schematic





Technical drawing of a mechanical part, showing a top view and a side view. The top view includes dimensions: 6.00 [0.236], 4.30 [0.169], 0.80 [0.031], 13.00 [0.512], 4.00 [0.157], 2.00±0.1 [0.079], 1.00 [0.039], 0.30 [0.020], 2.00 [0.079], 5.50±0.1 [0.217], 3.50±0.1 [0.138], 0.50 [0.020] Typ, 4.00±0.1 [0.157], 10.60±0.1 [0.417], 15.00 [0.591], and Travel. The side view includes dimensions: 1.20 [0.047] and 1.15 [0.045].


P.C. MOUNTING

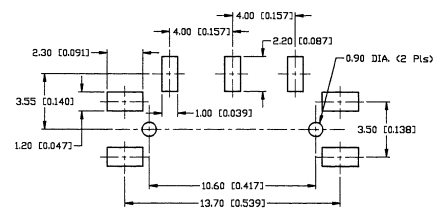


Schematic

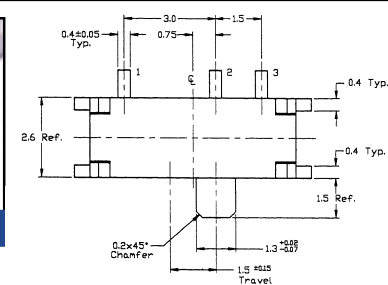

P.C. MOUNTING



Schematic




SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SERIES E G SWITCHES




SLIDE SWITCHES





1270





P.C. MOUNTING






Schematic




1271



P.C. MOUNTING

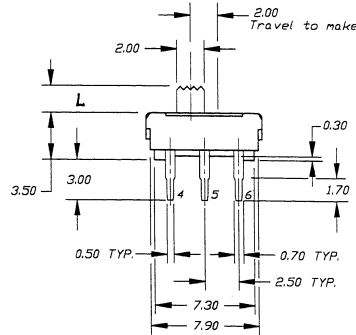



Schematic





Model No.	L
EG1271	2
EG1271A	4.4




1302



P.C. MOUNTING



Schematic



Model No.	L
EG1302	6
EG1302A	9

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.