

MICROPHONE DESKS

MD-94R4 / MD-94R6 / MD-94R12



Desktop paging microphones with zones selection, designed for a maximum easiness of use in the live messages. The zone selection can be connected directly to the priority control of the power units or to a MC/MS lines switching unit. MD-94R4 has 4 zones, MD-94R6 has 6 zones and MD-94R12 has 12 zones. All 3 models have also an all-call push-button.

Its swivel gooseneck type microphone allows the adjustment to the most appropriate position for the operator. All models have different dipswitches at the bottom that allow for their configuration: balanced or unbalanced output, 0 dB or - 60 dB output level and first-in first-served, or cascade priority.

They also have gong on-off switch and LED indicators for "on", "busy line", "chime" and "active" status. They have also an internal recording system that records the live message at same time that it is being sent and a push-button for the automatic repetition of the last message sent.


MD-94R4

MD-94R6

MD-94R12

System	Electret		
Gong	4 tones programmable		
Directionality	Unidirectional – cardioid		
Power supply	24 V.d.c. (external or through amplifier)		
Output impedance (1 kHz)	600 Ω		
Frequency response	180 \pm 15.000 Hz		
Sensitivity (1 kHz, 1 μ bar) (\pm 3 dB)	- 83 dB		
Output level	Selectable 775 mV - 1 mV		
Signal / noise ratio	> 56 dB		
Consumption	90 mA	130 mA	250 mA
Leds	On / Off, Gong, Talk and Busy		
Zone selection	4 + all call	6 + all call	12 + all call
Dimensions (mm)	205 x 220 x 65 (desk); 200 mm length (micro support)		
Weight	1.4 kg		
Finishing	Ivory ABS		
Remarks	16 s recording recall		

BLOCK DIAGRAM

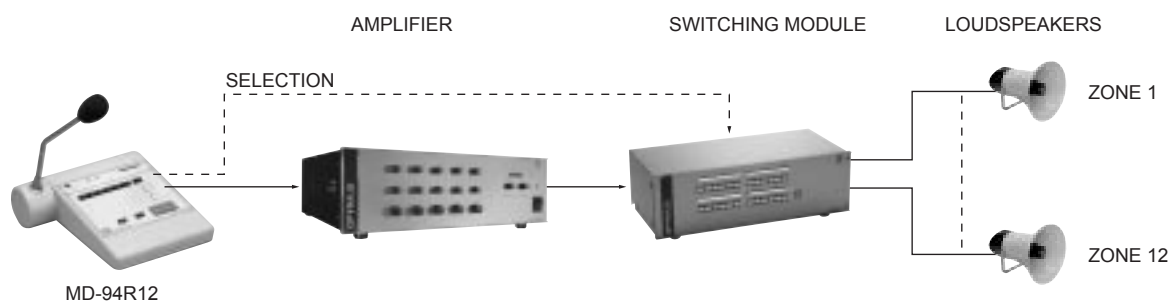

MICROPHONE DESKS

